

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
B1		改字码	LLC	24.02.20

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 8A
2. Withstanding voltage : AC1500V/1Min.
3. Insulation Resistance : 1000MΩ Min
4. Contact Resistance : 20mΩ Max

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	320V	250V	160V
Rate current(A)	5A		

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 3.81mm, Poles : N=4~48P
3. Operating temperature: -40°C~+105°C
4. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						-	∩	□
TO	Over	Over	Over	Over	Over	Over	0.1/10			
6	6 TO 10	10 TO 24	30 TO 30	30 TO 60	60 TO 100	100 TO 150	∠			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°		

5. RoHS Compliance

Ordering Information






JL15EDGRH - 381 XX G 01

Pitch
381=3.81PH

No. of pins
2P~24P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
O=Pe bag
A=Tray
T=Tube

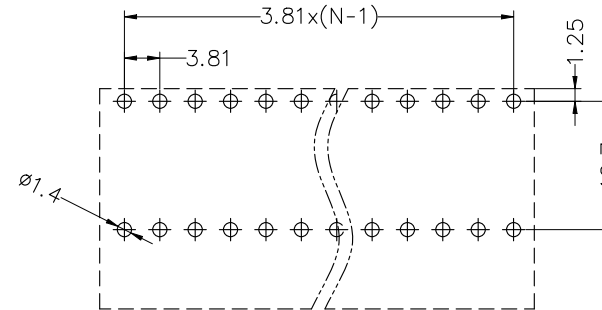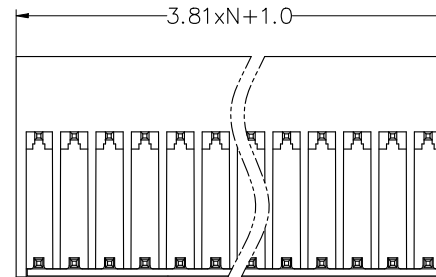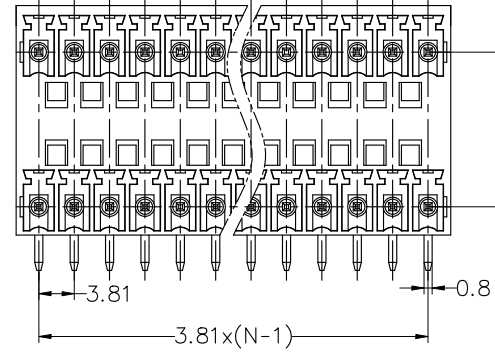

PCB LAYOUT

DRAW	LLC	SCALE	FIT	东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD	
		UNIT	mm		
CHECK	CHEN. W	SIZE	A4		
		SHEET	1/1		
APPROVE	GAO. YL	PROJ.		PART NO.	JL15EDGRH-381XXG01
				TITLE:	JL15EDGRH-3.81-2XNP插拔式公座/弯脚/绿色