
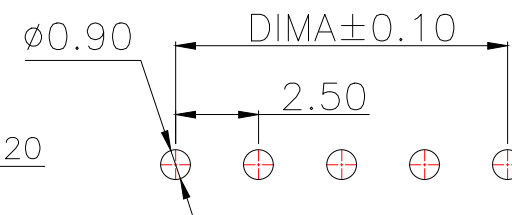
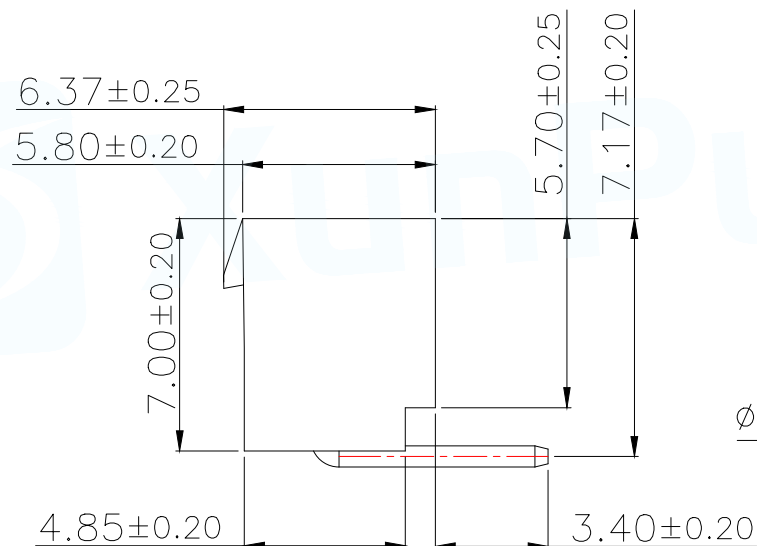


Part No	Pin	A	B
WAFER-HA2.54-2PWZ-R62	2	2.5	7.5
WAFER-HA2.54-3PWZ-R62	3	5.0	10.0
WAFER-HA2.54-4PWZ-R62	4	7.5	12.5
WAFER-HA2.54-5PWZ-R62	5	10.0	15.0
WAFER-HA2.54-6PWZ-R62	6	12.5	17.5
WAFER-HA2.54-7PWZ-R62	7	15.0	20.0
WAFER-HA2.54-8PWZ-R62	8	17.5	22.5
WAFER-HA2.54-9PWZ-R62	9	20.0	25.0
WAFER-HA2.54-10PWZ-R62	10	22.5	27.5
WAFER-HA2.54-11PWZ-R62	11	25.0	30.0
WAFER-HA2.54-12PWZ-R62	12	27.5	32.5
WAFER-HA2.54-13PWZ-R62	13	30.0	35.0
WAFER-HA2.54-14PWZ-R62	14	32.5	37.5
WAFER-HA2.54-15PWZ-R62	15	35.0	40.0
WAFER-HA2.54-16PWZ-R62	16	37.5	42.5
WAFER-HA2.54-17PWZ-R62	17	40.0	45.0

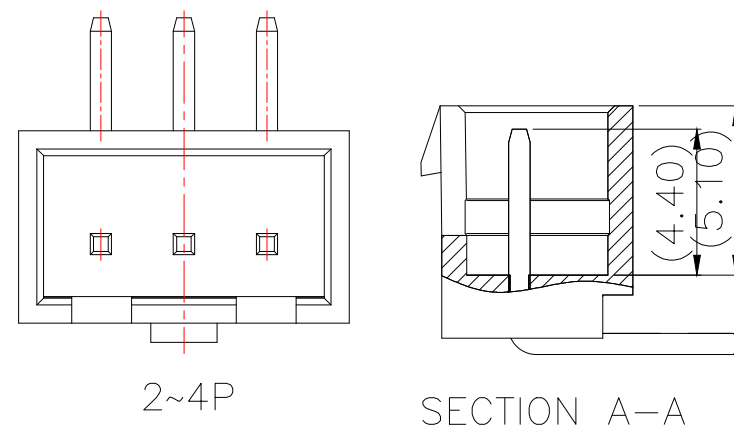

Technical Index:

1. Temperature range: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
2. Rated voltage: 250V DC/AC(rms).
3. Rated current: 3.0A.
4. Contact resistance: $\leq 20\text{m}\Omega$.
5. Withstanding voltage: 1000V AC/minute.
6. Insulation resistance: $\geq 1000\text{M}\Omega$.

序号	品名	材质
1	XH2.5 胶芯	PA66 UL94V-2 Red
2	XH2.5 弯针 端子	Copper Alloy/ Tin Plating

适用线路板(PCB LAYOUT)

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: HA2.5 弯针带扣	
DECIMALS:		PAR	WAFER-HA2.54-NPWZ-R62
ANGLES:		DWN	
X.: ± 0.50		CHKD	
X.X.: ± 0.20		APVD	
X.XX.: ± 0.10		SCALE:1:1	UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1
			REV:A