


REV	2	1
CONTENT	CONTENT	CHK
VO.0	CONTENT	YL
		DATE
		22.11.19


Electrical :

- | | | |
|---|---|------|
| | UL | IEC |
| 1.Rated Voltage : | 300V | 320V |
| 2.Rated Current : | 15A | 20A |
| 3.Withstanding Voltage : | AC1600V/1Min. | |
| 4.Operating Temperature : | -40°C~+105°C | |
| 5. RoHS Compliance | | |
| 6.Safty Approval : |  | |
| 7." ★ " is the key quality control point. | | |

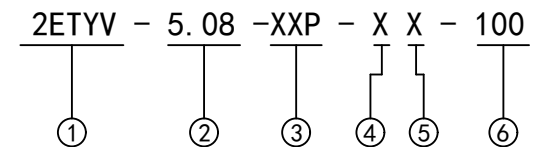


- | | |
|---|--|
| ① Sereies No. | ④ 1 Single Pitch
2 Double Pitch |
| ② Pitch | ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White |
| ③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts | ⑥ Customer Request: 100--Standard |





2	PIN	XX	P	BRASS	Tin Plated
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	YL	DATE	22.11.19	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE		SCALE	1:1	
APP.	DATE				
 拓宜(上海)工控电器设备有限公司 Topone(Shanghai) Industrial Control Electrical Equipment Co., LTD.			NAME	2ETYV-5.08-XXP-XX-100	
			DWGN0.	XXXX	

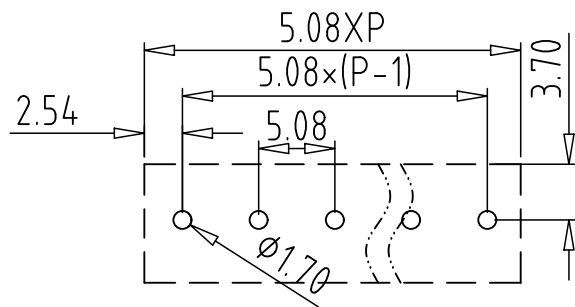

PCB Layout



SECTION A-A

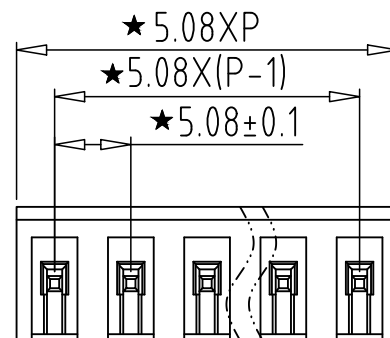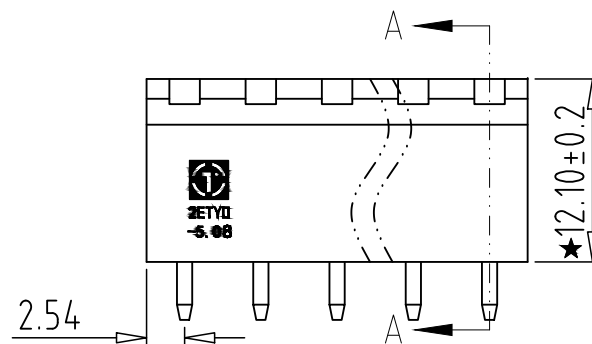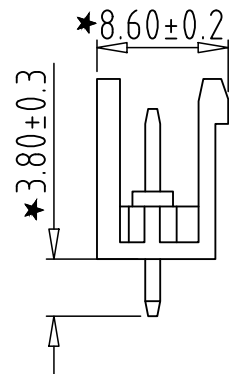

A	Total Pitch Tolerances in mm									Nominal dimension range in mm								$\perp$		$\equiv$	$-$	$//$			
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10			to 100	to 150		
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5	
6						5						4													