


# Kinghelm®

| REVISIONS |        |             |     |     |      |
|-----------|--------|-------------|-----|-----|------|
| REV       | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A         |        | DESIGN      |     |     |      |

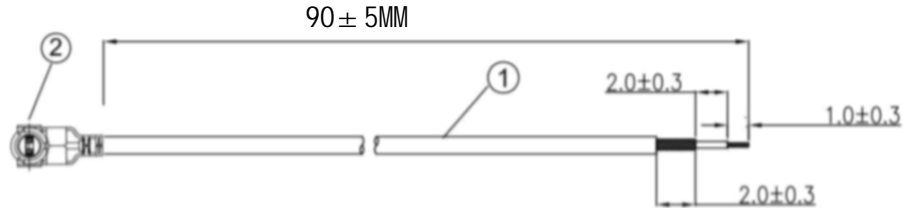

**NOTES:**

1. ELECTRICAL:
  - 1.1. VOLTAGE RATING-DCV 300V 10MS
  - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
  - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
  - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
  - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION           | QTY. |
|----------|-------------|-----------------------|------|
| ②        | 接头          | 三代IPEX端子              | 1    |
| ①        | 同轴线         | RG0.81 蓝色线, OD:0.81MM | AS   |

深圳市金航标电子有限公司


www.kinghelm.com.cn

KH-IPEX3-221-RG0.81-BU90

0755-28190160

|                                  |       |      |      |            |
|----------------------------------|-------|------|------|------------|
| ALL DIMENSION ARE IN MM          | DRAWN | Jamy | DATE | 2020-06-15 |
|                                  | ENG.  |      |      |            |
| COMPUTER GENERATED IN SOLIDWORKS | MFG.  |      |      |            |
| DO NOT SCALE THIS DRAWING        | Q.A.  |      |      |            |

三代IPEX TO OPEN RG0.81蓝色转接线



GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX  
± 1° ± 0.3 ± 0.25 ± 0.150

|             |        |              |   |
|-------------|--------|--------------|---|
| SIZE        | Number | REV          | A |
| SCALE: Free | TYPE   | SHEET 1 OF 1 |   |

CUSTOMER PIN: