

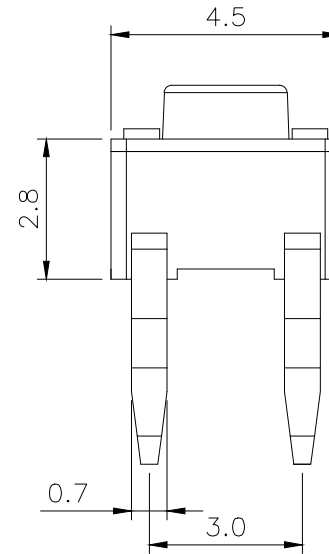
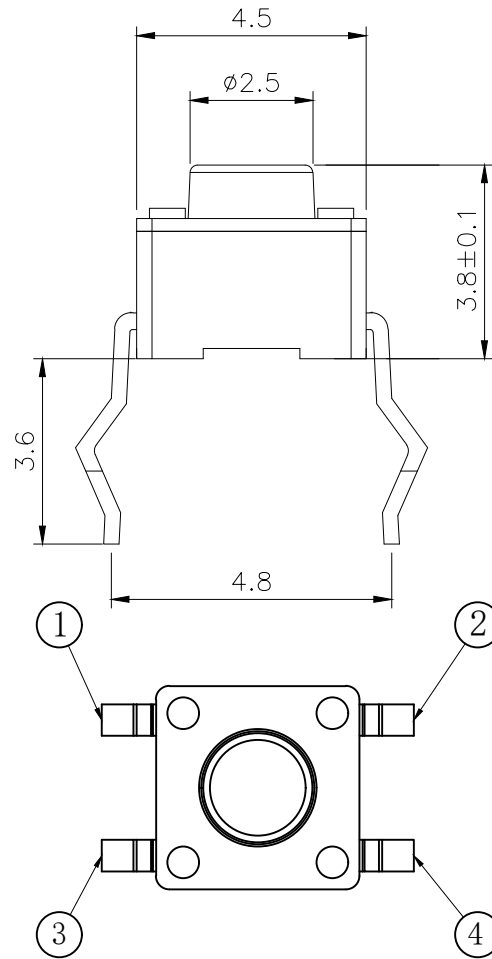



RoHS

CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

REV.	ECN. NO.	APPD.

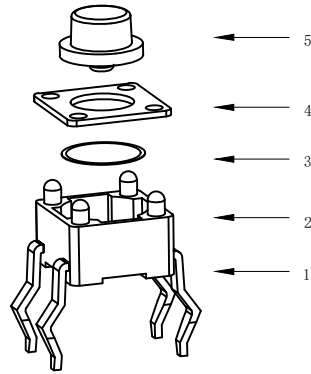

CIRCUIT DIAGRAM

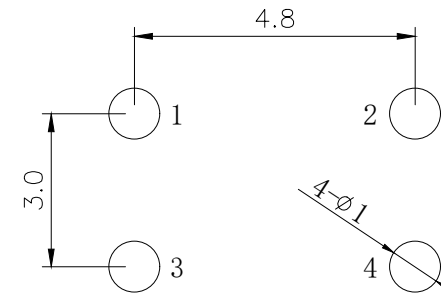

PCB WELDING DRAWING

Specification

Operating Life	100,000
Contact rating	50mA@12V DC.
Insulation resistance	1011Ω min.
Contact resistance	100mΩ max. initial.
Dielectric Strength	250 V AC(1mm)
Travel	0.2±0.15mm
Storage Temperature	-30° C to 85° C

Mechanical

ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR
E	Button	PPA	1	Black
D	COVER	Brass	1	Cleaning
C	DOVE	Stainless Steel	1	Plated Ag
B	HOUSING	PPA	1	Black
A	PIN	PHOSPHOR BRONZE	1	Plated Ag

Type	Operation #	Force(gf)	Height mm	Button Shape(G, J, T)	Ground pin (0, 1)	Pins Option(0, 1)
BTSOC0016	2	250±50	**	B (BLACK)	T	0 (None)
			P 9.5			
			N 9.0			
			M 8.0			
			L 7.5			
			K 7.0			
			J 6.5			
			H 6.0			
			G 5.5			
			F 5.0			
1	160±50		E 4.9			
			D 4.5			
			C 4.3			
			B 3.8			
			A 3.5			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF Bozhong TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED.

X. ±0.50	X.° ±2°	UNITS
.X ±0.30	.X° ±1°	mm
.XX ±0.10	.XX° ±0.5°	MAT'L
.XXX ±0.05		FINISH
		Q' TY

 博众电气 东莞市博众电气有限公司 Dongguan Bozhong Electrical Co., Ltd		TITLE: TACTILE SWITCH 4.5x4.5	
Series NO. BTSOC0016		DWG NO.: BTSOC0016	
APPD: ROGER		CHKD: ROC	
DR: BILLY WANG 2020/08/21		SCALE SHEET REV. 1/1 1/1 A1	

Packaging:
1000 pieces