


COIL: @ 25°C	
RESISTANCE	7600 OHMS ± 10%
NOMINAL VOLTAGE	120.0 VDC
MUST OPERATE	65.0 VDC
MUST RELEASE	7.7 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES: OPERATE & RELEASE 15 MS MAX.	
OPERATE BOUNCE 5 MS MAX.	
RELEASE BOUNCE 5 MS MAX.	

CUSTOMER DATA SHEET

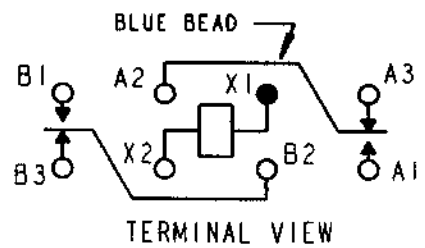

CONTACT RATING: 10 AMPS 28 VDC
5 AMPS 115 VAC/400 Hz RESISTIVE
50,000 OPERATIONS

DR. R.B. 5/19/92 CK. TLG 8-17-01



CUST. QPL	"07" RELAY
CUST. NO. M5757/23-036 REV.	

B07D932BE2-0352