


---

Item no.: 740-112  
Product description: PCB TERMINAL STRIP; 1 SOLDER PIN / POLE; 12 POLE;  
PIN SPACING 5 MM / 0.197 IN; SIDE-ENTRY; CAGE  
CLAMP®CONNECTION

---

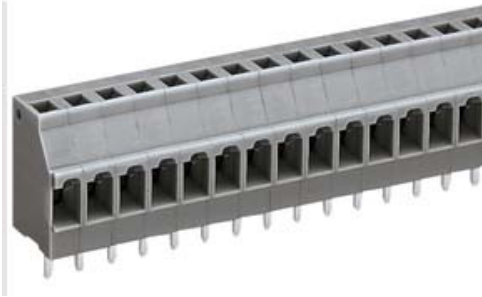

Packing unit 60 4\*15 pieces

Pin spacing from	5 mm
Pin spacing from	0,197 in
pole count	12
Cross section from [mm <sup>2</sup> ]	0,08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	2,5 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Connection method	CAGE CLAMP®CONNECTION
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	16 A
Voltage CSA	300 V
Current CSA	16 A
Voltage UL	300 V
Current UL	10 A
Weight	16,479 g
Color	grey
Wiring type	Side-entry
No. of connection Points	12
No. of potentials	12
Height	18,2 mm



Width	60 mm
Width	2,362 in
Depth	11,1 mm
Depth	0,437 in
Strip length from	6 mm
Strip length to	7 mm
Strip length	0,24 in



Item number	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [ mm <sup>2</sup> ]
740-112	ABS	04-HG469925-PDA	250	16	0,5-2,5
740-112	BBJ	B/12/697/03	250	16	0,5-2,5
740-112	BV	11915/A0	250	16	0,5-2,5
740-112	CCA	DK2097	250	16	0,5-2,5
740-112	CSA	154112-1711139	300	16	28-12
740-112	DEMKO	99-04159	250	16	0,5-2,5
740-112	DNV	E7569	250	16	0,5-2,5
740-112	GL	17296-00HH	250	16	0,5-2,5
740-112	RMR	11130002	250	16	0,5-2,5
740-112	UL	E45172	300	10	28-12

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected