
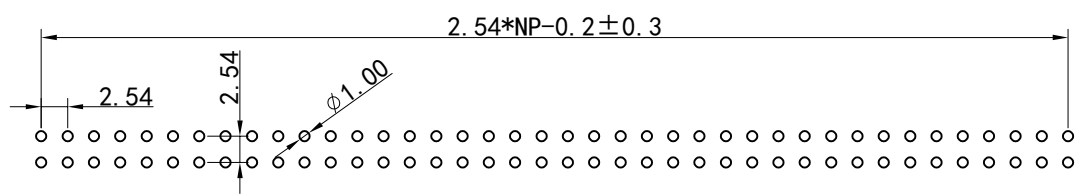
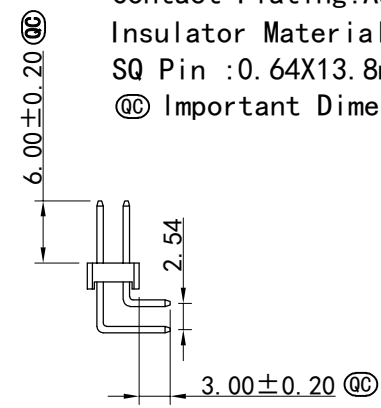


REV.	SPECIFICATION	ECN NO.	APPD.



SPECIFICATIONS

Current Rating:3A
 Contact Resistance:20mΩ Max
 Insulation Resistance:1000MΩ Min
 Withstand Voltage:600V AC/minute
 Operation Temperature:-40℃ to +105 ℃
 Contact Material: Brass
 Contact Plating: Au or Sn over 50u"Ni
 Insulator Material:PBT/PA6T (UL94V-0)
 SQ Pin :0.64X13.8mm 0.64X18.8mm
 Ⓞ Important Dimensions

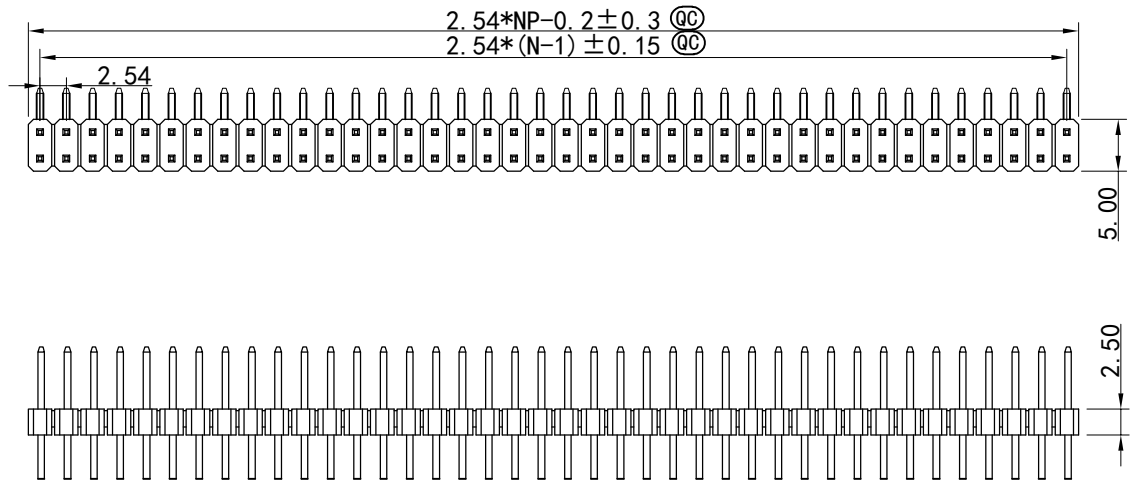

**RECOMMENDED PCB LAYOUT
 COMPONENT SIDE VIEW**

Series: 2012 - 2 X xx G 00 L B
 2: Double Row
 Pin number of each row: 01~40Pin
 G: Gold Plated
 T: Tin Plated
 B: Bulk Package
 L: Inflection
 00: Gold Flash
 10: 10u"
 15: 15u"
 30: 30u"
 Blank: for Tin & Matte Tin Plated

Tolerances	Dwg. No.	2012D01002		Title:	2012系列 双排排针 间距 2.54mm 2xNP 反弯 PA6.0 PC3.0 L=13.8/18.8 PBT 镀金GF ①535	 深圳市格林柏电子技术开发有限公司
	.x = ±0.30	Projection				
.xx = ±0.20	Unit	mm	Scale	1:1	SHEET 1/1	
	Drawn By	Martin 06/20'23		Ver.No.		A0