



Extract from the online
catalog

UGSK/S

Order No.: 0305080



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=0305080>

Component modular terminal block, Connection method: Screw
connection, Width: 8.2 mm, Mounting type: NS 35/7,5, NS 35/15, NS
32, Color: gray

Commercial data

EAN	4017918000745
Pack	50 pcs.
Customs tariff	85369010
Weight/Piece	0.027363 KG
Catalog page information	Page 397 (CL-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

General

Number of levels	1
Number of connections	2
Color	gray
Insulating material	PA

UGSK/S Order No.: 0305080

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=0305080>

Inflammability class acc. to UL 94	V2
------------------------------------	----

Dimensions

Length	61 mm
Width	8.2 mm
Height NS 35/7,5	53.5 mm
Height NS 35/15	61 mm
Height NS 32	58.5 mm

Technical data

Rated surge voltage	6 kV
Pollution degree	3
Surge voltage category	III
Insulating material group	I
Connection in acc. with standard	IEC 60947-7-1
Nominal current I_N	41 A
Nominal voltage U_N	500 V

Connection data

Conductor cross section solid min.	0.5 mm ²
Conductor cross section solid max.	10 mm ²
Conductor cross section stranded min.	0.5 mm ²
Conductor cross section stranded max.	6 mm ²
Conductor cross section AWG/kcmil min.	20
Conductor cross section AWG/kcmil max	8
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.5 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve max.	6 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.5 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve max.	4 mm ²
2 conductors with same cross section, solid min.	0.5 mm ²
2 conductors with same cross section, solid max.	1.5 mm ²
2 conductors with same cross section, stranded min.	0.5 mm ²
2 conductors with same cross section, stranded max.	4 mm ²

UGSK/S Order No.: 0305080

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=0305080>

2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.5 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	4 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	4 mm ²
Type of connection	Screw connection
Stripping length	11 mm
Screw thread	M4
Tightening torque, min	1.5 Nm
Tightening torque max	1.8 Nm

Certificates / Approvals



Certification

CUL, GL, GOST, KR, RS, UL

CUL

Nominal voltage U _N	600 V
Nominal current I _N	50 A
AWG/kcmil	26-8

UL


Nominal voltage U _N	600 V
Nominal current I _N	50 A
AWG/kcmil	26-8

UGSK/S Order No.: 0305080

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=0305080>

Drawings

Circuit diagram

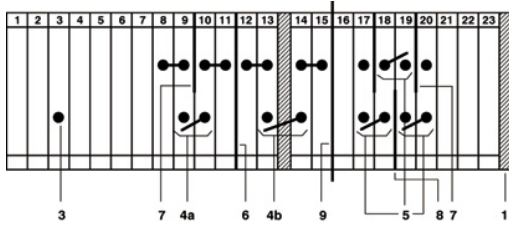

- 1 = cover
- 2 = fixed bridge
- 3 = slide
- 4 = switch bar for 2 terminal blocks
- 5 = double switch bar
- 6 = separating plate
- 7 = special separating plate, with cutout top left
- 8 = special separating plate, with cutout top right
- 9 = partition plate
- 10 = Zack marker strip
- 11 = screwdriver

UGSK/S Order No.: 0305080

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=0305080>

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2009 Phoenix Contact
Technical modifications reserved;

onlinecomponents.com