

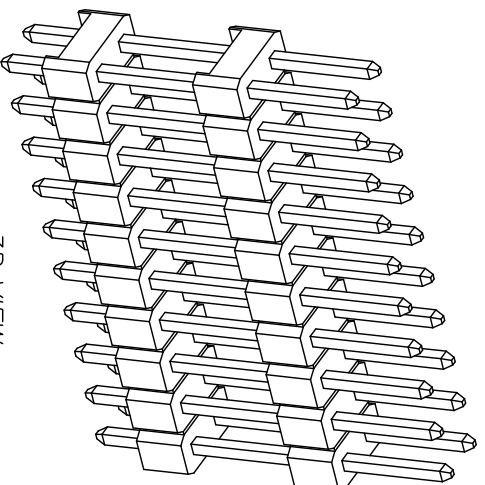


P.C.B LAYOUT

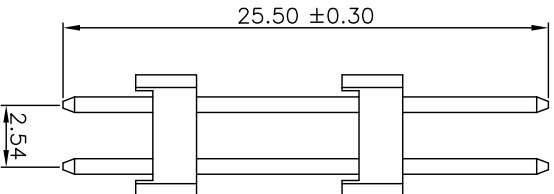


3D VIEW

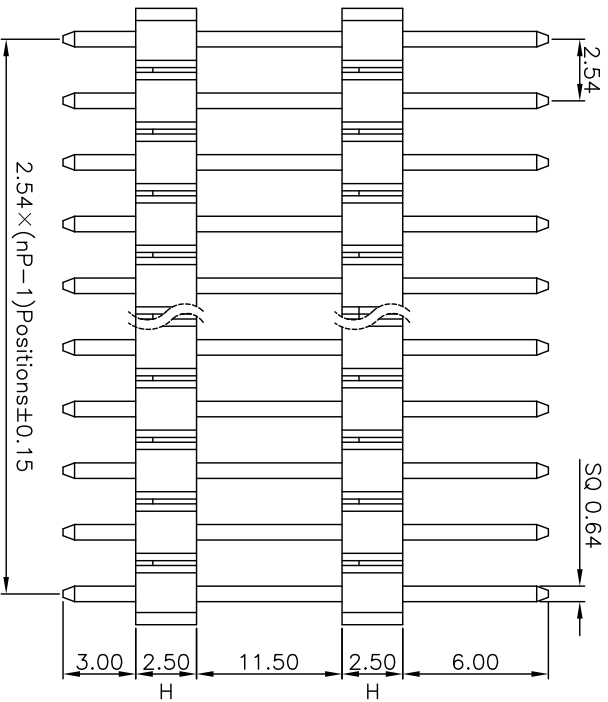

SPECIFICATIONS

Rated Current : 3.0AMP
Contact Resistance : 20mΩ Max
Withstand Voltage : 500V AC/DC
Insulation Resistance : 1000MΩ Min
Operation Temperature : -40°C to +108°C

Contact Material : Brass
Contact Plating : Au or Sn Over Ni
Insulator Material : Polyester(UL94V-0)
Standard : PA6T
Max Processing Temp : 230°C for 5-10 seconds

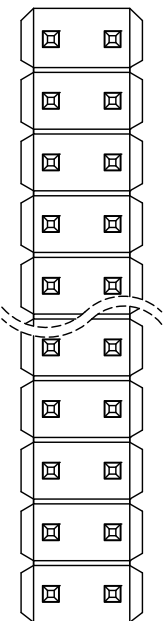

MODEL: 2.54-2xnp L25.5-H2.5-PA6 PC3	DRAWN BY : Leiqin	DATE:	GENERAL TOLERANCE: (UNLESS SPECIFIED)
TITLE : 双层双排塑高2.5直插排针	CHECKED BY : Liwei	DATE:	X. ±0.30mm X. ± 3'
DRAWING NO:	REV. : A	DATE:	X.X ±0.25mm X.X ± 2'
SHEET: 1 OF 1	SCALE: 3:1	DATE:	X.XX ±0.20mm X.XX ± 1'
SIZE: A4	UNIT : mm	DATE:	X.XXX±0.10mm X.XXX ± 0.5'



深圳市吉威电子有限公司
SZJUSTWELL ELECTRONICS CO., LTD

MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT

GD
TP
IP

NO:	PARTICULAR	BY	DATE
REVISIONS			
1			
2			
3			
4			
5			
6			
7			
8			