

MICRO SWITCH

FREEMONT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC


CATALOG LISTING

7XE1

7XE1
 PAGE 1 OF 1
 M
 DRAWING NUMBER
 X 8
 ISSUE
 34
 RELEASE NO. PR - 1049
 REPLACES

REVISIONS

A	CO 51463-H	WJM 29 NOV 84
B	CO 57328-A	WJM 15 APR 85
C	C094274	DLM 16 MAR 99

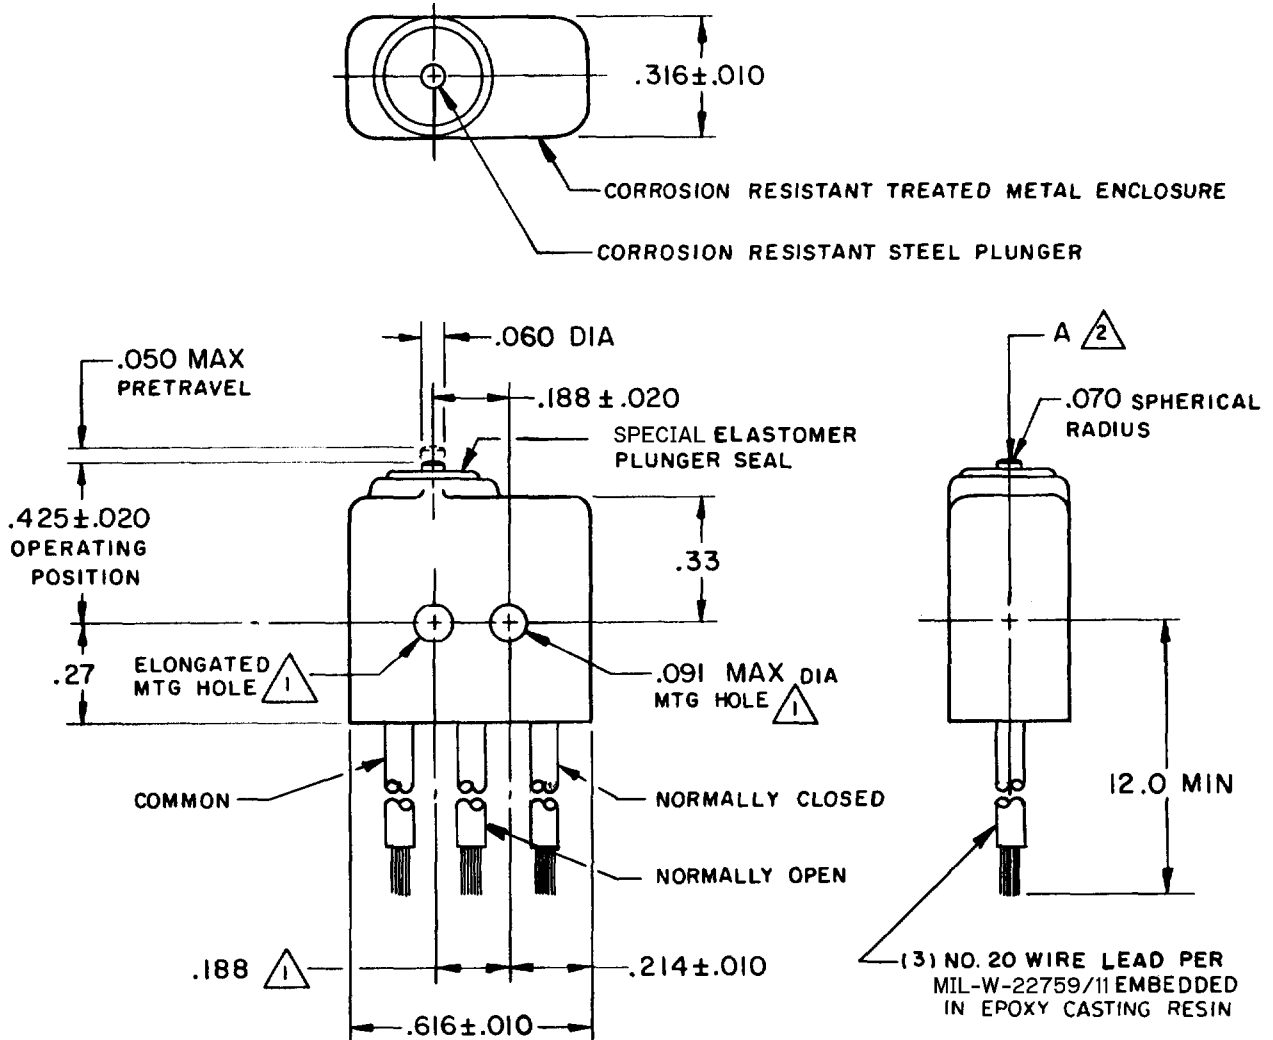

- NOTE -
- 1 MOUNTING HOLES WILL ACCEPT $.087$ MAX DIA PINS OR SCREWS ON $.188 \pm .002$ CENTERS
 - 2 ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
 - 3 WEIGHT OF SWITCH ONLY IS $.16$ OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS $.55$ OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	
OPERATING FORCE	10 OZ MAX
RELEASE FORCE	2 OZ MIN
RELEASE TRAVEL	.004 MIN
DIFFERENTIAL TRAVEL	.005 MAX
OVERTRAVEL	.004 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
28 VOLTS DC RATING	
INDUCTIVE	SEA LEVEL - 4 AMP 50,000 FT - 2.5 AMP
RESISTIVE	SEA LEVEL - 7 AMP 50,000 FT - 7 AMP
MAXIMUM INRUSH	24 AMP

SCALE 2 TO 1
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm .005$

WEIGHT $\pm .005$

FORMTEK
 FO-50378-1A
 DRAWN
 G C H
 20 DEC 69
 CHECK
 L S D
 G J A N 70
 CHECK
 G L R