

## Optocoupler - PLC-OSC-120UC/ 24DC/ 2/C1D2 - 5603262

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PLC-INTERFACE, consisting of DIN rail-mountable basic terminal block with screw connection and plug-in miniature solid-state relay, input: 120 V AC/110 V DC, output: 3 - 33 V DC/3 A, UL/cUL: approved for use in Ex Zone Class I, Div. 2



### Key Commercial Data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 pc     |
| Minimum order quantity               | 10 pc    |
| Weight per Piece (excluding packing) | 38.0 g   |
| Custom tariff number                 | 85364900 |
| Country of origin                    | Germany  |

### Technical data

#### Note

|                         |   |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

#### Dimensions

|        |        |
|--------|--------|
| Width  | 6.2 mm |
| Height | 80 mm  |
| Depth  | 94 mm  |

#### Ambient conditions

|   |                  |
|---|------------------|
| Ambient temperature (operation)         | -20 °C ... 60 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |

#### Input data

|                             |                     |
|-----------------------------|---------------------|
| Nominal input voltage $U_N$ | 120 V AC (110 V DC) |
|                             | 110 V DC            |

# Optocoupler - PLC-OSC-120UC/ 24DC/ 2/C1D2 - 5603262

## Technical data

### Input data

|  |                    |
|--|--------------------|
| Input voltage range in reference to $U_N$            | 0.9 ... 1.1        |
| Switching threshold "0" signal in reference to $U_N$ | $\leq 0.3$         |
| Switching threshold "1" signal in reference to $U_N$ | $\geq 0.8$         |
| Typical input current at $U_N$                       | 3.5 mA             |
| Typical response time                                | 3.5 ms (at $U_N$ ) |
| Typical turn-off time                                | 7 ms (at $U_N$ )   |
| Operating voltage display                            | Yellow LED         |
| Type of protection                                   | Bridge rectifier   |
| Protective circuit/component                         | Bridge rectifier   |
| Transmission frequency                               | 10 Hz              |

### Output data

|  |                             |
|--|-----------------------------|
| Output voltage range                             | 3 V DC ... 33 V DC          |
| Limiting continuous current                      | 3 A                         |
| Maximum inrush current                           | 15 A (10 ms)                |
| Voltage drop at max. limiting continuous current | $\leq 200$ mV               |
| Output circuit                                   | 2-wire, floating            |
| Type of protection                               | Reverse polarity protection |
|  | Surge protection            |
| Protective circuit/component                     | Polarity protection diode   |

### Connection data, input side

|                                  |  |
|----------------------------------|--|
| Connection name                  | Input side                                   |
| Connection method                | Screw connection                             |
| Stripping length                 | 8 mm   |
| Screw thread                     | M 3  |
| Conductor cross section solid    | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section flexible | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 26 ... 14                                    |

### Connection data, output side

|                                  |  |
|----------------------------------|--|
| Connection name                  | Output side                                  |
| Connection method                | Screw connection                             |
| Stripping length                 | 8 mm   |
| Screw thread                     | M 3  |
| Conductor cross section solid    | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section flexible | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 26 ... 14                                    |

# Optocoupler - PLC-OSC-120UC/ 24DC/ 2/C1D2 - 5603262

## Technical data

### General

|  |                                       |
|--|---------------------------------------|
| Test voltage input/output              | 2.5 kV (50 Hz, 1 min.)                |
| Mounting position                      | any                                   |
| Assembly instructions                  | In rows with zero spacing             |
| Operating mode                         | 100% operating factor                 |
| Flammability rating according to UL 94 | V0                                    |
| Designation                            | Standards/regulations                 |
| Standards/regulations                  | IEC 60664                             |
|  | EN 50178                              |
|  | IEC 62103                             |
| Rated surge voltage/insulation         | Basic insulation                      |
| Degree of pollution                    | 2                                     |
| Overvoltage category                   | III                                   |
| UL, USA                                | Class I, Zone 2, AEx nA nC IIC T6     |
| UL, USA / Canada                       | Class I, Div. 2, Groups A, B, C, D    |
| UL, Canada                             | Class I, Zone 2, Ex nA nC IIC Gc T6 X |

### Standards and Regulations

|  |                                       |
|--|---------------------------------------|
| Designation                            | Standards/regulations                 |
| Standards/regulations                  | IEC 60664                             |
|  | EN 50178                              |
|  | IEC 62103                             |
| Rated surge voltage/insulation         | Basic insulation                      |
| Degree of pollution                    | 2                                     |
| Overvoltage category                   | III                                   |
| Flammability rating according to UL 94 | V0                                    |
| Conformance                            | CE-compliant                          |
| UL, USA                                | Class I, Zone 2, AEx nA nC IIC T6     |
| UL, USA / Canada                       | Class I, Div. 2, Groups A, B, C, D    |
| UL, Canada                             | Class I, Zone 2, Ex nA nC IIC Gc T6 X |

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27371102 |
| eCl@ss 4.1 | 27371102 |
| eCl@ss 5.0 | 27371001 |
| eCl@ss 5.1 | 27371001 |
| eCl@ss 6.0 | 27371001 |

# Optocoupler - PLC-OSC-120UC/ 24DC/ 2/C1D2 - 5603262

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 7.0 | 27371001 |
| eCl@ss 8.0 | 27371604 |

### ETIM


|          |          |
|----------|----------|
| ETIM 3.0 | EC001504 |
| ETIM 4.0 | EC001504 |
| ETIM 5.0 | EC001504 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211916 |
| UNSPSC 7.0901 | 39121542 |
| UNSPSC 11     | 39121542 |
| UNSPSC 12.01  | 39121542 |
| UNSPSC 13.2   | 39121542 |

## Drawings

Diagram

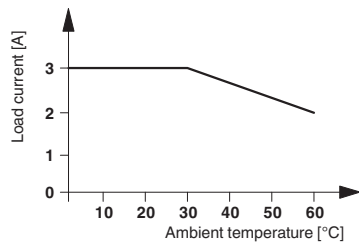

Circuit diagram

