


Connector Marking

WIRING TABLE

C1	WIRE COLOR	C2
8	BROWN	8
7	BROWN/WHITE	7
6	GREEN	6
5	BLUE/WHITE	5
4	BLUE	4
3	GREEN/WHITE	3
2	ORANGE	2
1	ORANGE/WHITE	1

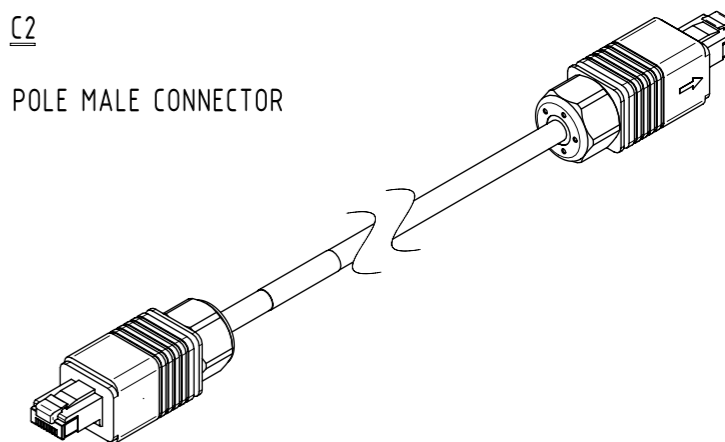

HARTING P/N & REVISION	Cable length (L)
3325 213 010 0002 .00	1000 ± 20
3325 213 100 0002 .00	10000 ± 200

NOTES

- 1.)CABLE MUST UNDERGO CONTINUITY AND HI-POT(500VDC) TESTING.
- 2.)THE CABLE SHOULD BE PACKED BY THE PLASTIC BAG. THEN PUT IT INTO THE CARTON(THE QTY ACCORDING TO ACTUAL CONDITION)
- 3.)EXPORT CARTON SHOULD BE STICKED THE LABEL WITH P/N AND QTY.
- 4.)WHITE LABEL CONTENT:

DATE CODE & LOT INFORMATION

HARTING P/N & REVISION

5.)CABLE OPERATION TEMPERATURE: -20°C TO +60°C

	All rights reserved Department EC PD - CN	All Dimensions in mm Original Size DIN A3		Scale 1:1	Free size tol.	Ref. \
		HARTING Electronics GmbH D-32339 Espelkamp	Created by LIT	Inspected by	Standardisation	Date 2014-10-08
Title PushPull RJ45,8 pole,568B,dul-end,L=XXMM						Doc-Key / ECM-Nr. 100596672/UGD/000/A
Type TB		Number 33250002		Rev. A	Page 1/1	