

## Printed-circuit board connector - PTF 0,3/ 2-WB-1,8-H - 1826091


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Plug component, Nominal current: 10 A, Rated voltage (III/2): 25 V, Number of positions: 2, Pitch: 1.8 mm, Color: White, Contact surface: Silver



### Key commercial data

Packing unit	1 PCE
Minimum order quantity	250 PCE
GTIN	 4 046356 834018
Custom tariff number	85444290
Country of origin	GERMANY

### Technical data

#### Dimensions

Pitch	1.8 mm
Dimension a	1.8 mm

#### General

Range of articles	PTF 0,3/..-WB-H
Insulating material group	IIIa
Rated voltage (III/3)	25 V
Rated voltage (III/2)	25 V
Rated voltage (II/2)	25 V
Nominal current $I_N$	10 A
Nominal cross section	0.34 mm <sup>2</sup>
Maximum load current	10 A (Total current of all contacts)
Insulating material	PBT

# Printed-circuit board connector - PTF 0,3/ 2-WB-1,8-H - 1826091

## Technical data

### General

Inflammability class according to UL 94	V0
---	----

## Classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27141190
eCl@ss 6.0	27260704
eCl@ss 7.0	27440401
eCl@ss 8.0	27440401

### ETIM


ETIM 3.0	EC001121
ETIM 4.0	EC002638
ETIM 5.0	EC002638

### UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

## Drawings

Dimensioned drawing

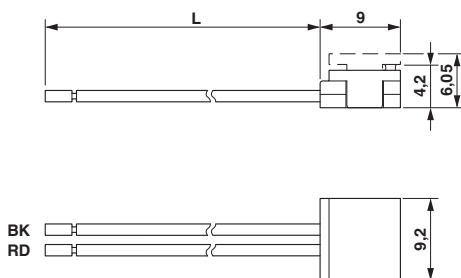

Dimension L: 500 mm

Dimensioned drawing

