

Honeywell Sensing and Control



Search



4TL11-8

(Home : Products : Switches » MICRO SWITCH™ Toggle Switches » TL)

[contacts](#)


narrow your search

Products

- Controls Monitoring and Lighting (286)
- Machine Safety (1727)
- Sensors (6158)
- Switches (9781)
- Wireless (45)

Technology

- Control and Instrumentation (890)
- Electromechanical (9303)
- Magnetic (538)
- Platinum thin film (56)
- Thick Film (1372)
- More...



TL Series Toggle Switch, 4 pole, 2 position, Screw terminal, Standard Lever

Actual product appearance may vary.

[Sales & Service](#) → [Distributor Inventory](#) →

- Customer Service
- Technical Support
- Global Sales & Service
- View Site Demo
- Site Comments?

[meet dr. larry](#)

VIDEO - Dr. Larry Goldstein explains our newest and best technologies.



Meet Dr. Larry

[my links](#)

- Login to iCOM
- Login to Rep/AD Portal
- Login to Digital University

[News Center](#)

HONEYWELL INTRODUCES TRUSTABILITY® NSC SERIES, UNCOMPENSATED / UNAMPLIFIED BOARD MOUNT PRESSURE SENSORS

HONEYWELL EXPANDS ITS LIMITLESS™ PLATFORM WITH THE LAUNCH OF ITS GLOBALLY AVAILABLE INDUSTRIAL WIRELESS RECEIVER

HONEYWELL EXTENDS ITS TRUSTABILITY® PRESSURE SENSOR PRODUCT LINE WITH A SINGLE SIDE LIQUID MEDIA OPTION

MICRO SWITCH Anniversary site

new products

New Wireless Products

Go farther. Work smarter. Explore new possibilities. Just by cutting the cord and making the switch.



Wireless Web Site
WGLA and WPMM
XYR6000™

[find out more](#)

white papers

- Wireless Switches Offer Unlimited Benefit
- Basic Switches Are Not Created Equal
- Applying Precision Switches
- Sensors for Medical Devices
- New Ways to Measure Torque
- Choosing Safety Switches
- Specifying Hour Meters


Need help?

[Click here to contact us](#)

[Overview](#) [Specs](#) [Documentation](#) [Application Notes](#)

Product Specifications

Circuitry/Operating action

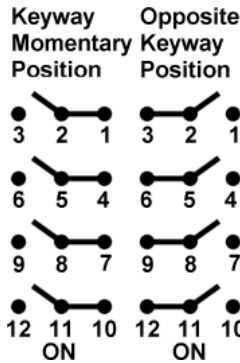

Product Type	MICRO SWITCH™ Toggle Switch
Ampere/Voltage Range (Resistive Load)	0.75 A at 115 Vdc, 0.5 A at 250 Vdc, 0.5 A to 18 A at 0.5 Vdc to 28 Vdc, 0.5 A to 10 A at 0.5 Vac to 277 Vac
Circuitry	4PDT
Action	2 position
Mounting	Bushing 15/32 in
Termination	Screw
Lever Type	Standard
Comment	Silver cadmium oxide contacts
Availability	Global
UNSPSC Code	30211908
UNSPSC Commodity	30211908 Toggle switches
Series Name	TL