

## Sensor/actuator box - SACB-8/16-M23 - 1692844

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/actuator box, Application: Standard, Connection method: M12 socket Plastic, Number of slots: 8, Number of positions: 5, Coding: A - standard, Slot assignment: Double, Status indication: No, Universal; Master cable connection: M23 plug connection 90°, Shielding: No

### Product Features

- Safety in the field, thanks to molded housing and high degree of protection
- Flexible, distributed bundling of signals in one master cable
- Save space: distributor box with double occupancy for two sensors in one slot



### Key Commercial Data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 pc     |
| Weight per Piece (excluding packing) | 137.8 g  |
| Custom tariff number                 | 85366990 |
| Country of origin                    | Poland   |

### Technical data

#### General

|  |            |
|--|------------|
| Rated voltage                            | 120 V      |
| Max. operating voltage $U_{max}$         | 135 V      |
| Current carrying capacity per I/O signal | 2 A        |
| Current carrying capacity per slot       | 4 A        |
| Total rated current                      | 12 A       |
| Number of positions                      | 5          |
| Number of slots                          | 8          |
| Flammability rating according to UL 94   | V0         |
| Sensor/actuator connection system        | M12 socket |

#### Ambient conditions

|                      |      |
|----------------------|------|
| Degree of protection | IP65 |
|----------------------|------|

# Sensor/actuator box - SACB-8/16-M23 - 1692844

## Technical data

### Ambient conditions

|                                 |                  |
|---------------------------------|------------------|
|                                 | IP67             |
| Ambient temperature (operation) | -20 °C ... 75 °C |

### Master cable data/connection data

|  |                     |
|--|---------------------|
| Connection method                            | M23 plug connection |
| Tightening torque slot sensor/actuator cable | 0.4 Nm              |

### Insulation material

|  |             |
|--|-------------|
| Housing material                               | PA          |
| Contact material                               | CuSn        |
| Contact surface material                       | Ni/Au       |
| Contact carrier material                       | PA          |
| Material of contact, master cable side         | CU alloy    |
| Material of contact surface, master cable side | Gold-plated |
| Material of threaded sleeve                    | PA          |
| O-ring material                                | NBR         |

### Pin assignment

|  |                        |
|--|------------------------|
| Slot/position = Wire color or connection | 1 / 4 (A) = 15         |
|  | 1 / 2 (B) = 7          |
|  | 2 / 4 (A) = 5          |
|  | 2 / 2 (B) = 4          |
|  | 3 / 4 (A) = 16         |
|  | 3 / 2 (B) = 8          |
|  | 4 / 4 (A) = 3          |
|  | 4 / 2 (B) = 14         |
|  | 5 / 4 (A) = 17         |
|  | 5 / 2 (B) = 9          |
|  | 6 / 4 (A) = 2          |
|  | 6 / 2 (B) = 13         |
|  | 7 / 4 (A) = 11         |
|  | 7 / 2 (B) = 10         |
|  | 8 / 4 (A) = 1          |
|  | 8 / 2 (B) = 18         |
|  | 1-8 / 1 (+ 120 V) = 19 |
|  | 1-8 / 3 (0 V) = 6      |
|  | 1-8 / 5 (PE) = 12      |

### Standards and Regulations

## Sensor/actuator box - SACB-8/16-M23 - 1692844

### Technical data

#### Standards and Regulations

|  |     |
|--|-----|
| Connection in acc. with standard       | CUL |
| Flammability rating according to UL 94 | V0  |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27140815 |
| eCl@ss 4.1 | 27140815 |
| eCl@ss 5.0 | 27143423 |
| eCl@ss 5.1 | 27143423 |
| eCl@ss 6.0 | 27143423 |
| eCl@ss 7.0 | 27449001 |
| eCl@ss 8.0 | 27279219 |
| eCl@ss 9.0 | 27440108 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000200 |
| ETIM 3.0 | EC001856 |
| ETIM 4.0 | EC002585 |
| ETIM 5.0 | EC002585 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31261501 |
| UNSPSC 7.0901 | 31261501 |
| UNSPSC 11     | 31261501 |
| UNSPSC 12.01  | 31261501 |
| UNSPSC 13.2   | 31261501 |

### Approvals

#### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

---

#### Ex Approvals

---

## Sensor/actuator box - SACB-8/16-M23 - 1692844

### Approvals

Approvals submitted

#### Approval details

|   |       |
|---|-------|
| UL Recognized  |       |
| mm <sup>2</sup> /AWG/kcmil  | 22-16 |
| Nominal voltage UN  | 120 V |


|  |       |
|--|-------|
| cUL Recognized  |       |
| mm <sup>2</sup> /AWG/kcmil   | 22-16 |
| Nominal voltage UN   | 120 V |

|     |
|-----|
| EAC |
|-----|

|  |
|--|
| cULus Recognized  |
|--|


### Drawings

Schematic diagram



M12 slot, socket, 5-pos.


Schematic diagram



M23 plug connection pin, 19-pos.

## Sensor/actuator box - SACB-8/16-M23 - 1692844

Circuit diagram

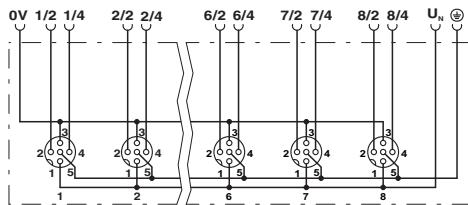

Dimensional drawing

