



Relays & Contactors > Relays > Power Relays



Relay Type: **Standard**

Coil Magnetic System: **Monostable, DC**

Coil Power Rating DC: **254 mW**

Coil Resistance: **2270 Ω**

Coil Special Features: **UL Coil Insulation Class A**

Features

Product Type Features

Relay Type	Standard
------------	----------

Configuration Features

Coil Special Features	UL Coil Insulation Class A
Contact Arrangement	1 Form A (NO)
Contact Number of Poles	1

Electrical Characteristics

Insulation Initial Dielectric Between Contacts & Coil	1000 V
Contact Limiting Making Current	10 A
Contact Limiting Short-Time Current	8 A
Contact Limiting Continuous Current	8 A
Contact Limiting Breaking Current	8 A
Coil Power Rating DC	254 mW
Coil Resistance	2270 Ω
Coil Voltage Rating	24 VDC
Contact Current Rating	8 A
Contact Switching Load (Min)	100mA @ 12V
Contact Switching Voltage (Max)	400 VAC
Contact Voltage Rating	250 VAC



Body Features

Product Weight	9.2 g [.388 oz]
----------------	-----------------

Contact Features

Contact Material	AgSnO ₂
------------------	--------------------

Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	Solder Pins

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Dimensions

Insulation Creepage Between Contact & Coil	8 mm [.315 in]
Product Width	10 mm [.393 in]
Product Length	28.6 mm [1.12 in]
Product Height	15 mm [.59 in]

Usage Conditions

Environmental Ambient Temperature (Max)	85 °C [185 °F]
---	----------------

Operation/Application

Solder Process	Wave Solder
Coil Magnetic System	Monostable, DC

Packaging Features

Packaging Method	Tube
------------------	------

Other

Length Class (Mechanical)	25 - 30 mm
Insulation Initial Dielectric Between Coil & Contact Class	3500 - 4000 V
Environmental Ambient Temperature Class	70 - 85 °C
Insulation Creepage Class	5.5 - 8 mm
Coil Power Rating Class	200 - 300 mW
Width Class (Mechanical)	8 - 10 mm
Contact Current Class	16 A

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 2-1393222-0
V23061A1005A302=MINISTARKSTROM



TE Part # 1-1416200-0
V23061A1009A302

Also in the Series | SCHRACK Low Power PCB Relays

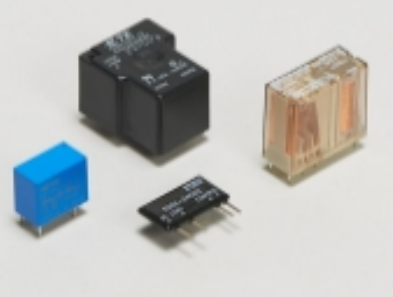

Power Relays(20)

Customers Also Bought



TE Part # 3-2176055-3
RLP73K 2B R22 1% 1K RL



TE Part # T4111401031-000
M12,MALE,STRAIGHT,B CODE,3P, PG7,GOLD



TE Part # 1-1419108-1
RT315730



TE Part # 9-1393222-1
V23061B1005A301=MINISTARKSTROM



TE Part # 3-1623774-8
C14 68R 5% (LOOSE)




TE Part # 1-1649328-0
RT314005



TE Part # 6-1393234-8
RP421024



TE Part # 2265037-2
Cable assy, MiniSuperseal to wire pin

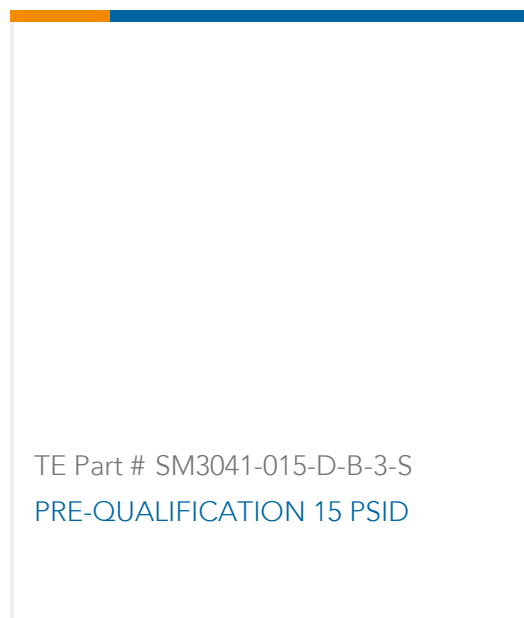

TE Part # SM3041-015-D-B-3-S
PRE-QUALIFICATION 15 PSID

Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_3-1393222-9_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-1393222-9_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-1393222-9_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Miniature Power PCB Relay MSR](#)

English



Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

VDE Certificate

English