

## ANGELETTE-WW-B

~60° wide beam compatible with BJB and B+W connectors

### SPECIFICATION:

Dimensions	Ø 110.0 mm
Height	57.3 mm
Fastening	socket
ROHS compliant	yes ⓘ




### MATERIALS:

Component	Type	Material	Colour	Finish	Coating
ANGELETTE-WW-B	Reflector	PC	metal		

### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
F14618_ANGELETTE-WW-B » Box size: 398 x 298 x 265 mm	120	90	30	5.2

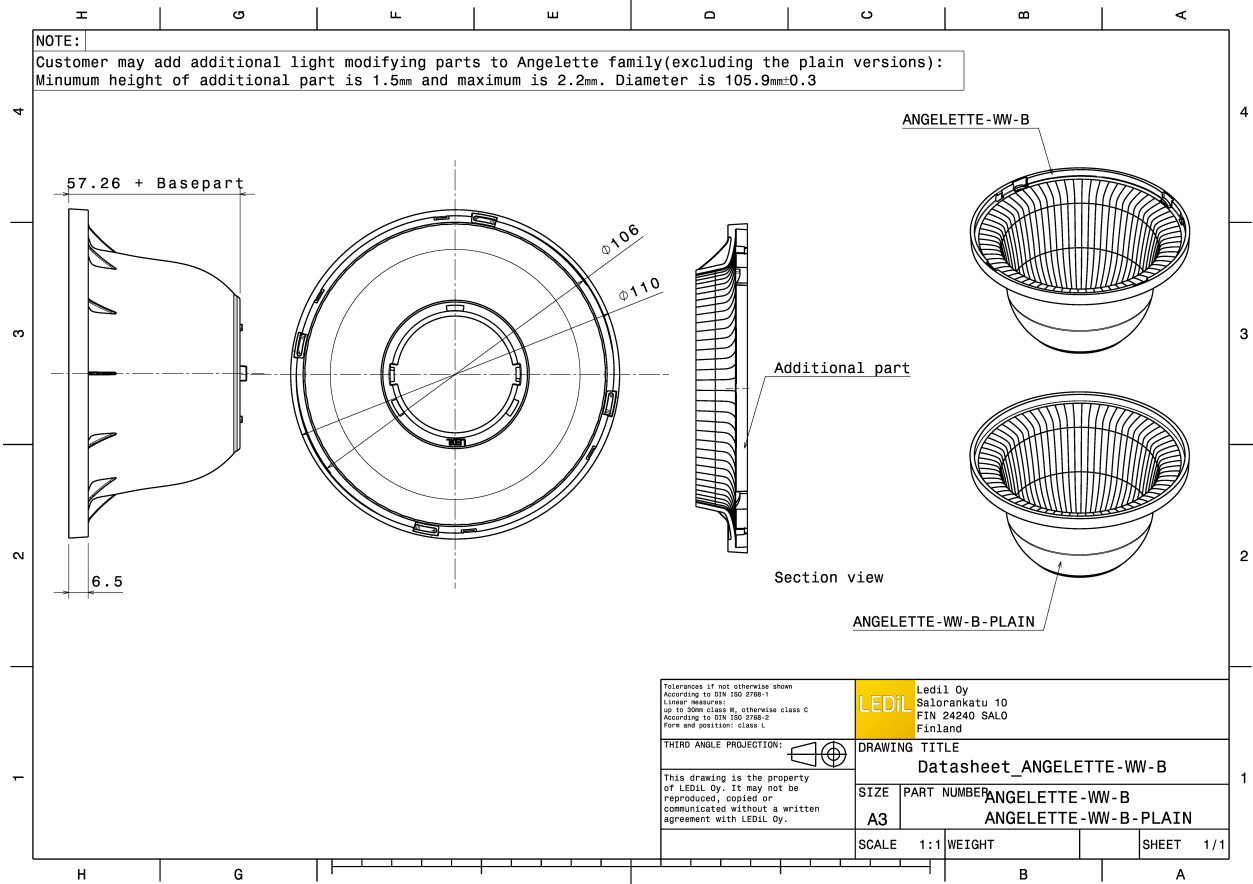


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

#### OPTICAL RESULTS (MEASURED):

bridgelux


LED V15 Gen6  
 FWHM / FWTM 66.0° / 88.0°  
 Efficiency 85 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 F13671\_ANGE-RZ-LENS  
 BJB: 47.319.2224

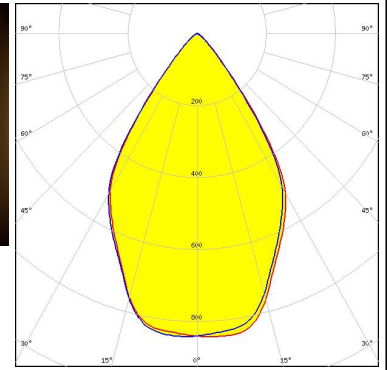

Light distribution files

bridgelux


LED V15 Gen6  
 FWHM / FWTM 65.0° / 83.0°  
 Efficiency 89 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 BJB: 47.319.2224

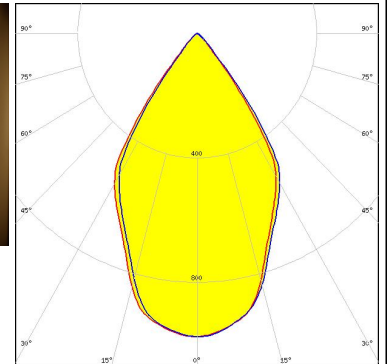

Light distribution files

bridgelux

LED V18 Gen6  
 FWHM / FWTM 65.0° / 88.0°  
 Efficiency 86 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 F13671\_ANGE-RZ-LENS  
 BJB: 47.319.2274


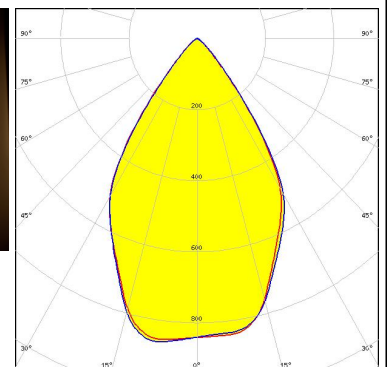


Light distribution files

#### OPTICAL RESULTS (MEASURED):





LED V18 Gen6  
 FWHM / FWTM 64.0° / 83.0°  
 Efficiency 89 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 BJB: 47.319.2274

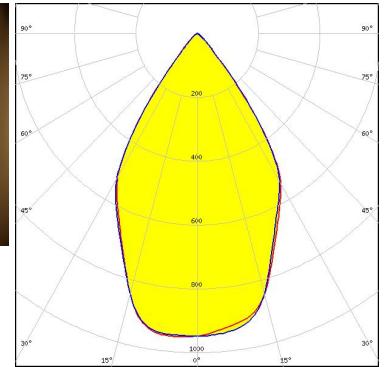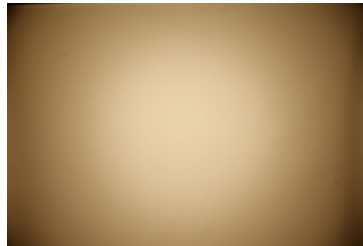

Light distribution files





LED V18 Gen7  
 FWHM / FWTM 64.0° / 83.0°  
 Efficiency 89 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 BJB: 47.319.2350

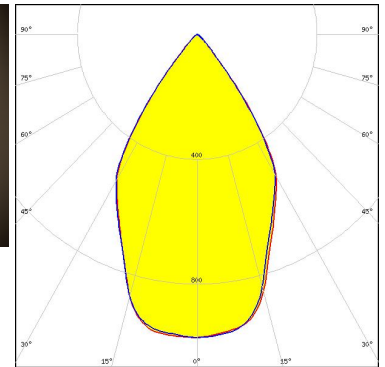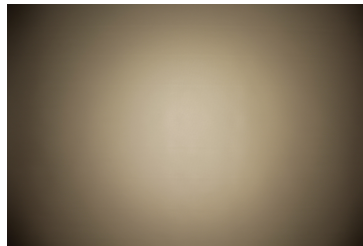

Light distribution files



LED V22 Gen6  
 FWHM / FWTM 63.0° / 84.0°  
 Efficiency 87 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 A.A.G. STUCCHI: 8102-G2

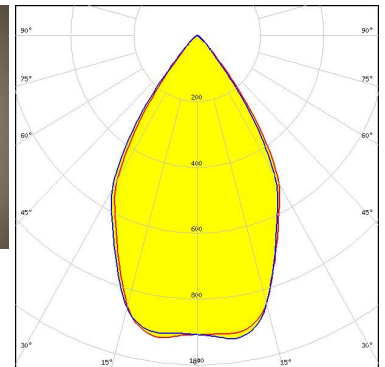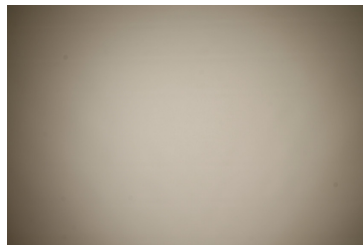


Light distribution files



#### OPTICAL RESULTS (MEASURED):

bridgelux



LED V22 Gen6  
 FWHM / FWTM 64.0° / 88.0°  
 Efficiency 83 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 F13671\_ANGE-RZ-LENS  
 A.A.G. STUCCHI: 8102-G2

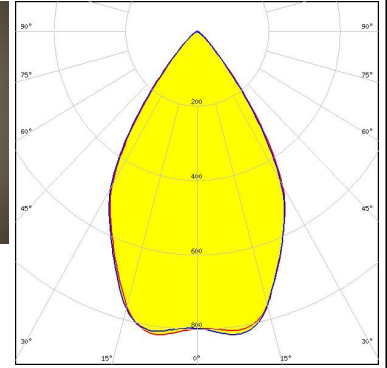

Light distribution files

#### CITIZEN



LED CLL03x/CLU03x  
 FWHM / FWTM 63.0° / 82.0°  
 Efficiency 89 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 A.A.G. STUCCHI: 8101-G2

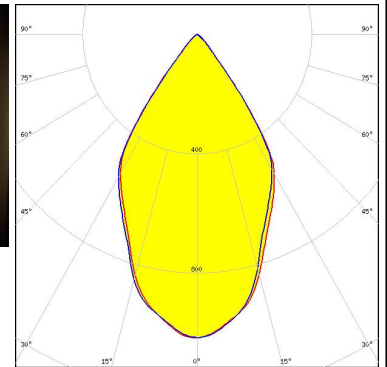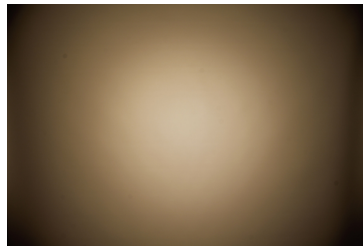

Light distribution files

#### CITIZEN

LED CLL03x/CLU03x  
 FWHM / FWTM 65.0° / 87.0°  
 Efficiency 85 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 F13671\_ANGE-RZ-LENS  
 A.A.G. STUCCHI: 8101-G2

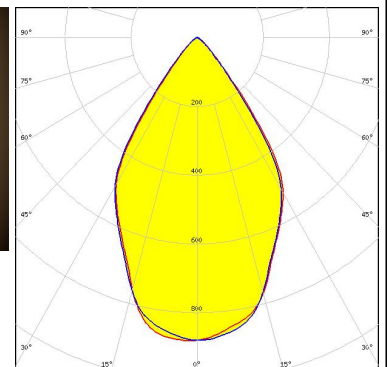
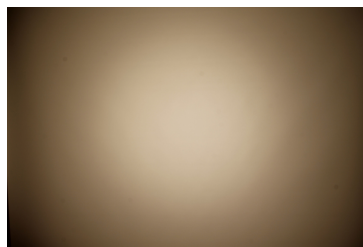


Light distribution files

#### OPTICAL RESULTS (MEASURED):





LED CXA/B 1816 & CXA/B 1820 & CXA 1850  
 FWHM / FWTM 62.0° / 81.0°  
 Efficiency 90 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 A.A.G. STUCCHI: 8403/G2

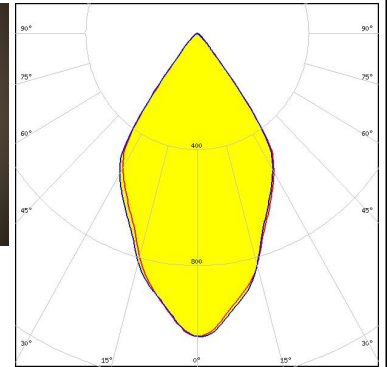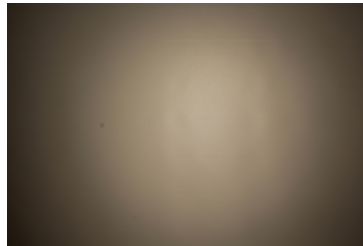

Light distribution files





LED CXA/B 25xx  
 FWHM / FWTM 63.0° / 83.0°  
 Efficiency 88 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 A.A.G. STUCCHI: 8401-G2

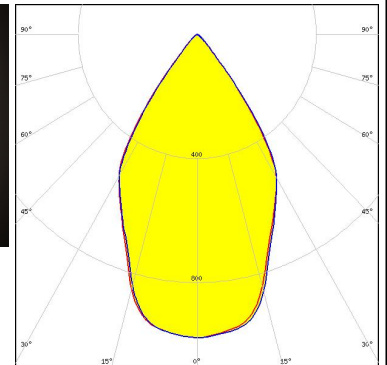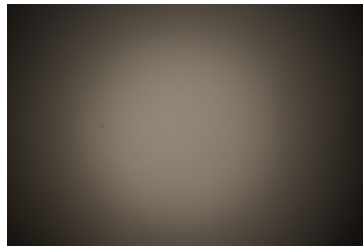

Light distribution files



LED LUXEON CoB 1208  
 FWHM / FWTM 63.0° / 82.0°  
 Efficiency 89 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 A.A.G. STUCCHI: 8301-G2

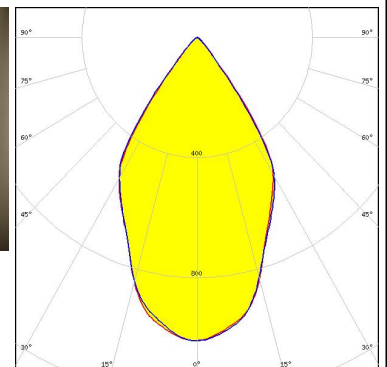
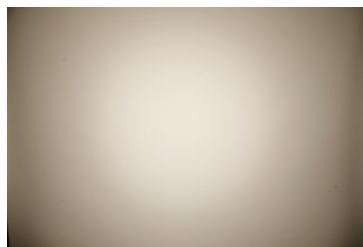


Light distribution files

#### OPTICAL RESULTS (MEASURED):





LED LUXEON CoB 1208  
FWHM / FWTM 63.0° / 82.0°  
Efficiency 89 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
A.A.G. STUCCHI: 8301-G2

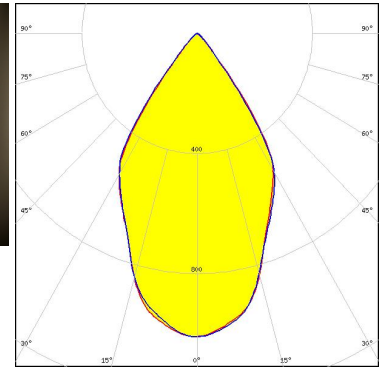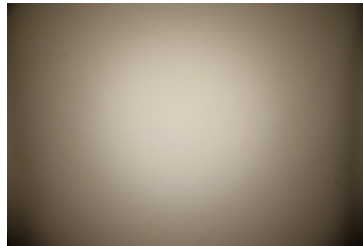

Light distribution files





LED LUXEON CoB 1208  
FWHM / FWTM 66.0° / 87.0°  
Efficiency 85 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
F13671\_ANGE-RZ-LENS  
A.A.G. STUCCHI: 8301-G2

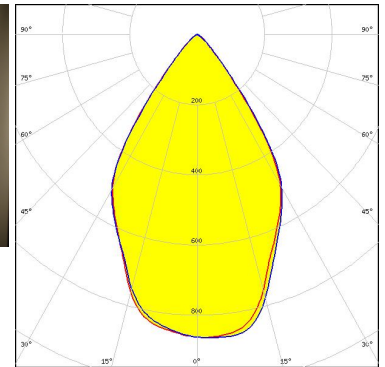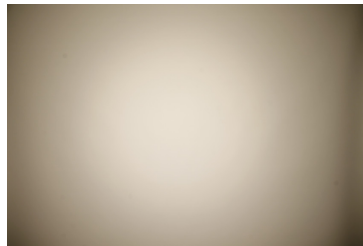

Light distribution files



LED Fortimo SLM L19 CoB  
FWHM / FWTM 63.0° / 83.0°  
Efficiency 89 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
BJB: 47.319.2030

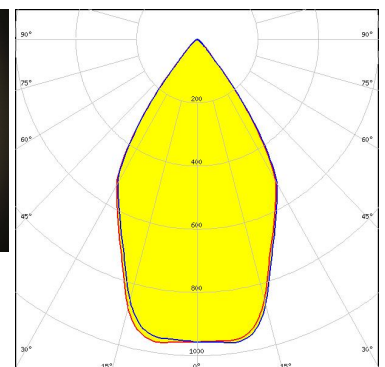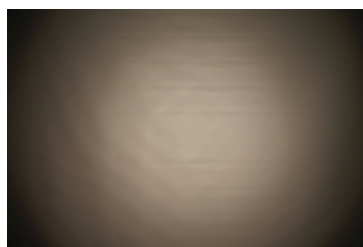


Light distribution files

#### OPTICAL RESULTS (MEASURED):

### PHILIPS



LED Fortimo SLM L19 CoB  
FWHM / FWTM 65.0° / 87.0°  
Efficiency 84 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
F13671\_ANGE-RZ-LENS  
BJB: 47.319.2030

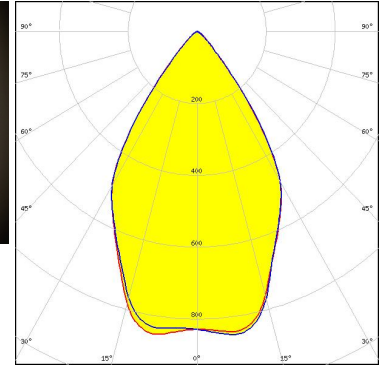

Light distribution files

### PHILIPS



LED Fortimo SLM L23 CoB  
FWHM / FWTM 64.0° / 88.0°  
Efficiency 84 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
F13671\_ANGE-RZ-LENS  
BJB: 47.319.2030

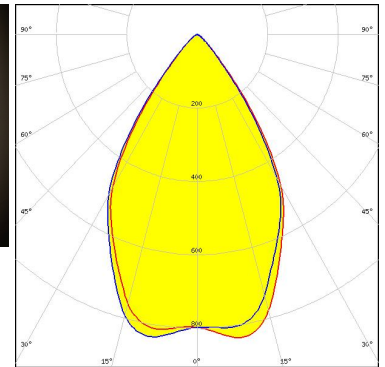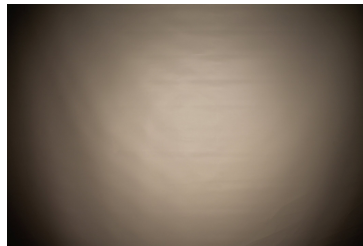

Light distribution files

### PHILIPS

LED Fortimo SLM L23 CoB  
FWHM / FWTM 62.0° / 84.0°  
Efficiency 88 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
BJB: 47.319.2030

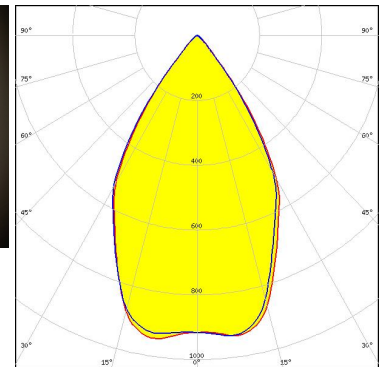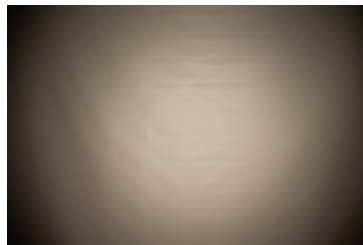


Light distribution files

#### OPTICAL RESULTS (MEASURED):

### SAMSUNG



LED LC016D / LC019D / LC026D / LC033D  
FWHM / FWTM 66.0° / 88.0°  
Efficiency 86 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
F13671\_ANGE-RZ-LENS  
A.A.G. STUCCHI: 8101-G2

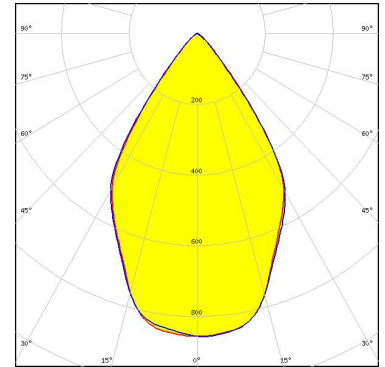

Light distribution files

### SAMSUNG


LED LC016D / LC019D / LC026D / LC033D  
FWHM / FWTM 65.0° / 83.0°  
Efficiency 90 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
BJB: 47.319.2021

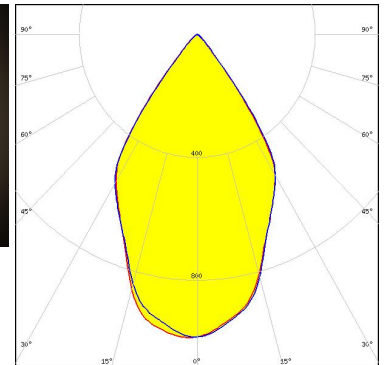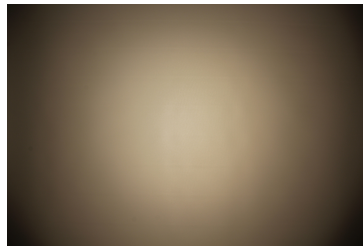

Light distribution files

### SAMSUNG

LED LC016D / LC019D / LC026D / LC033D  
FWHM / FWTM 66.0° / 88.0°  
Efficiency 86 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
F13671\_ANGE-RZ-LENS  
BJB: 47.319.2021


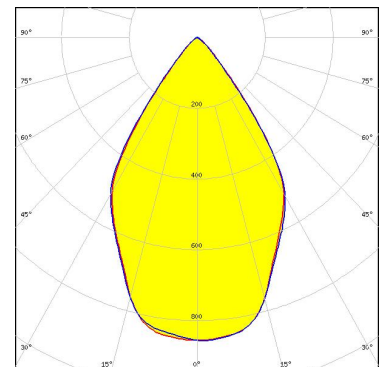


Light distribution files

#### OPTICAL RESULTS (MEASURED):

### SAMSUNG


LED LC016D / LC019D / LC026D / LC033D  
 FWHM / FWTM 65.0° / 83.0°  
 Efficiency 90 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 A.A.G. STUCCHI: 8101-G2

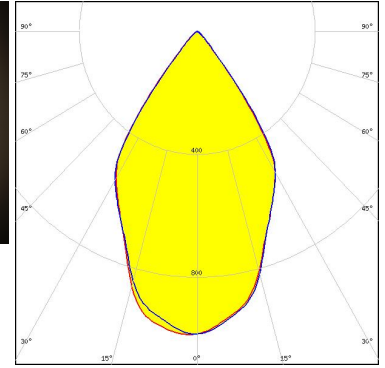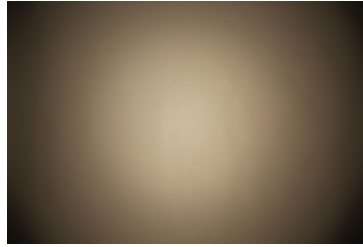

Light distribution files

### TRIDONIC


LED SLE G7 LES15  
 FWHM / FWTM 63.0° / 82.0°  
 Efficiency 90 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 BJB: 47.319.2021

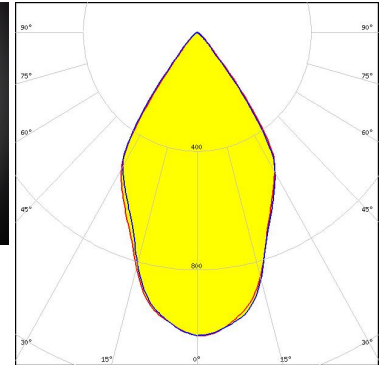

Light distribution files

### TRIDONIC

LED SLE G7 LES17 H  
 FWHM / FWTM 59.0° / 81.0°  
 Efficiency 88 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

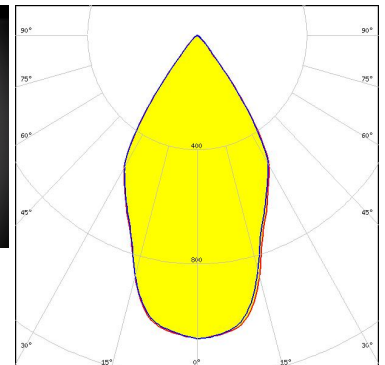


Light distribution files



#### OPTICAL RESULTS (MEASURED):

### TRIDONIC



LED SLE G7 LES21 H  
FWHM / FWTM 61.0° / 82.0°  
Efficiency 88 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

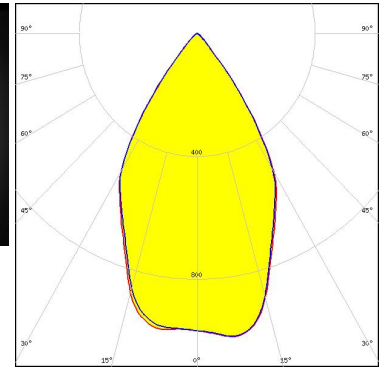

Light distribution files

### XICATO

LED XOB 14.5 mm  
FWHM / FWTM 64.0° / 82.0°  
Efficiency 91 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
BJB: 47.319.2021

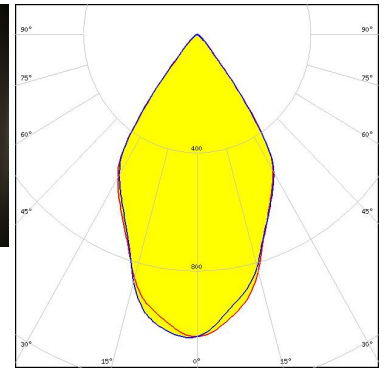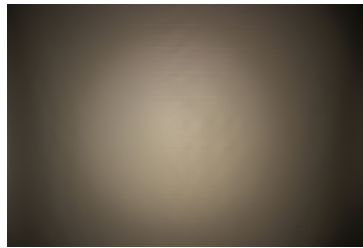

Light distribution files


#### OPTICAL RESULTS (SIMULATED):

### CITIZEN

LED CLL03x/CLU03x  
FWHM / FWTM 54.0° / 80.0°  
Efficiency 89 %  
Peak intensity 1.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

BJB: 47.319.2021

Light distribution files

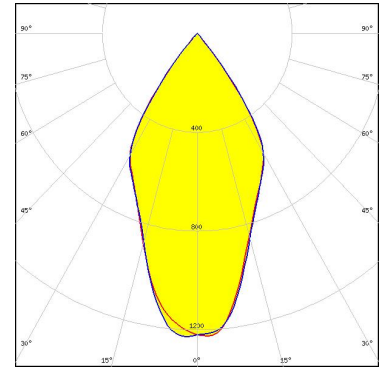


### CITIZEN

LED CLL04x/CLU04x  
FWHM / FWTM 58.0° / 81.0°  
Efficiency 88 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

BJB: 47.319.2030

Light distribution files

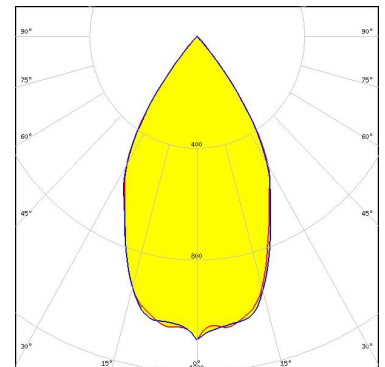


### SAMSUNG

LED LC040D / LC060D / LC080D  
FWHM / FWTM 60.0° / 81.0°  
Efficiency 87 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

BJB: 47.319.2030


Light distribution files

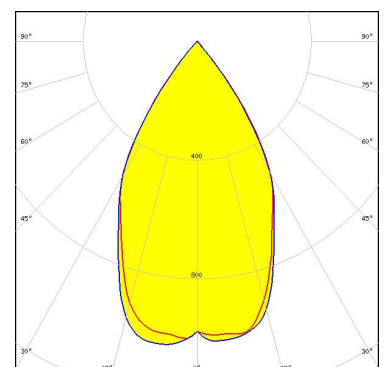

#### OPTICAL RESULTS (SIMULATED):

### TRIDONIC

LED	SLE G7 LES21 H
FWHM / FWTM	56.0° / 78.0°
Efficiency	84 %
Peak intensity	1.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
	F15412_ANGELETTE-DL

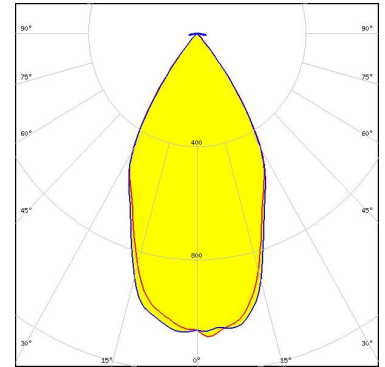

Light distribution files

#### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

#### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)