

## Honeywell Sensing and Control

Search



**4TL1-12P**

( Home : Products : Switches » MICRO SWITCH™ Toggle Switches » TL )

[contacts](#)


**narrow your search**

**Products**

- Controls Monitoring and Lighting (286)
- Machine Safety (1727)
- Sensors (6158)
- Switches (9781)
- Wireless (45)

**Technology**

- Control and Instrumentation (890)
- Electromechanical (9303)
- Magnetic (538)
- Platinum thin film (56)
- Thick Film (1372)
- More...



**TL Series Toggle Switch, 4 pole, 3 position, Screw terminal, Locking Lever, Military Part Number MS27409-1P**

*Actual product appearance may vary.*

[Sales & Service](#)

[Distributor Inventory](#)

- Customer Service
- Technical Support
- Global Sales & Service
- View Site Demo
- Site Comments?

[meet dr. larry](#)

**VIDEO** - Dr. Larry Goldstein explains our newest and best technologies.



Meet Dr. Larry

[my links](#)

- Login to iCOM
- Login to Rep/AD Portal
- Login to Digital University

[News Center](#)

HONEYWELL INTRODUCES TRUSTABILITY® NSC SERIES, UNCOMPENSATED / UNAMPLIFIED BOARD MOUNT PRESSURE SENSORS

HONEYWELL EXPANDS ITS LIMITLESS™ PLATFORM WITH THE LAUNCH OF ITS GLOBALLY AVAILABLE INDUSTRIAL WIRELESS RECEIVER

HONEYWELL EXTENDS ITS TRUSTABILITY® PRESSURE SENSOR PRODUCT LINE WITH A SINGLE SIDE LIQUID MEDIA OPTION

[MICRO SWITCH Anniversary site](#)

[new products](#)

[New Wireless Products](#)

Go farther. Work smarter. Explore new possibilities. Just by cutting the cord and making the switch.



[Wireless Web Site WGLA and WPMM XYR6000™](#)

[find out more](#)

[white papers](#)

- Wireless Switches Offer Unlimited Benefit
- Basic Switches Are Not Created Equal
- Applying Precision Switches
- Sensors for Medical Devices
- New Ways to Measure Torque
- Choosing Safety Switches
- Specifying Hour Meters


[Need help?](#)

[Click here to contact us](#)

[Overview](#)   [Specs](#)   [Documentation](#)   [Application Notes](#)


**Product Specifications**

Circuitry/Operating action

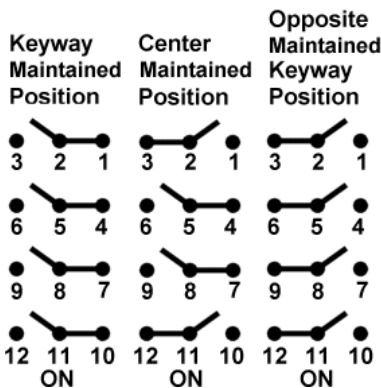

Product Type  
Lever Lock

MICRO SWITCH™ Toggle Switch



Locked out of and into extreme position (Keyway side)

Ampere/Voltage Range (Resistive Load)	0.5 A to 20 A at 0.5 Vdc to 28 Vdc, 0.75 A at 115 Vdc, 0.5 A to 15 A at 0.5 Vac to 277 Vac, 0.5 A at 250 Vdc
Circuitry	4PDT
Action	3 position
Mounting	Bushing 15/32 in
Termination	Screw
MIL Spec. Number	MS27409-1P
Lever Type	Locking
UL/CSA	L191: 15 A-125, 250, 277 Vac; 1/2 Hp-125 Vac; 1 Hp-250, 277 Vac; 5 A-120 Vac "L"
Comment	Silver cadmium oxide contacts
Availability	Global
UNSPSC Code	30211908
UNSPSC Commodity	30211908 Toggle switches
Series Name	TL