
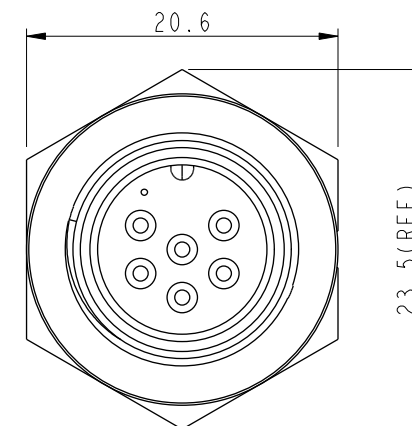
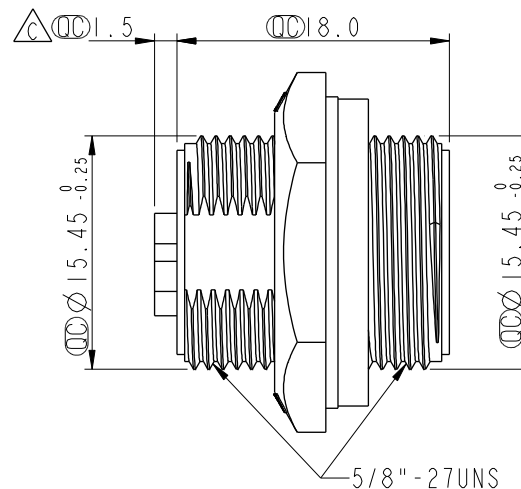



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0561	2008/09/19	Shin	Add Note and Change Format to Standard
C	LEN-940072	2009/03/19	LiuShuYun	Change Size 1.50 to 1.5

ALTW
CONFIDENTIAL
2012-03-26
R&D DEPT.

ALTW
DCC. DEPT.
CONFIDENTIAL
2012-04-09
ISSUED

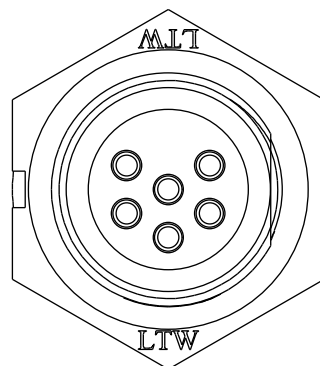

With Liquid Glue

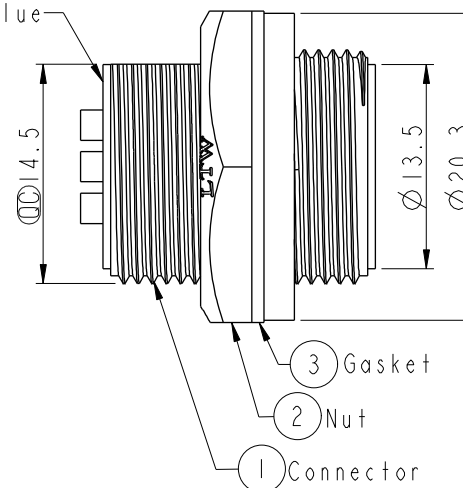


Note:


- * $\varnothing$ Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Black, Nylon+GF
- * Male Pin: Copper Alloy, Gold Plated
- * Nut: Black, Nylon+GF
- * Gasket: Black, EPDM

$\triangle B^*$ Use With Waterproof Cap Or DustCap
Panel Thickness Max: 4.0mm

$\triangle B^*$ Use Without Waterproof Cap Or DustCap
Panel Thickness Max: 5.0mm



Pin Assignments
Front View



Recommended Panel Cut-out

UNIT:mm		TOLERANCE		TITLE		ITEM NO	DRAWN BY	DATE
.X ±0.25		.XX ±0.1		Standard, Rear Screw 6P M Conn M Pin		BD-06RMMS-SC7001	SamChang	2012-03-26
.XXX ±0.05		ANGLES ±1°		SCALE 2:1	SIZE A4	BD-06RMMS-SC7001	CHECKED BY Jeffrey	DATE 2012-04-09
REV. C		WC-REV. A.2		SHEET 1 OF 1		CUSTOMER ALTW	APPROVED BY Lion	DATE 2012-04-09
				QC: Inspection item				

Amphenol LTW
安費諾亮泰企業股份有限公司