

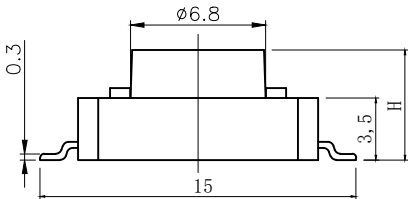






RoHS

CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

REV.	ECN. NO.	APPD.

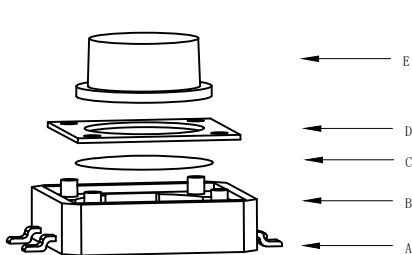

CIRCUIT DIAGRAM

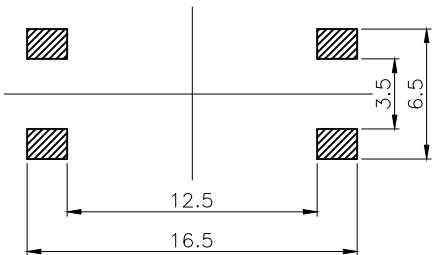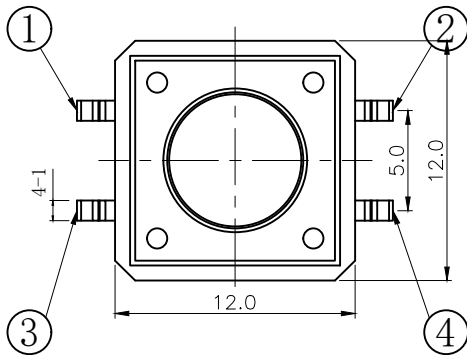

PCB. WELDING DRAWING

Specification

Operating Life	100,000
Contact rating	50mA@12V DC.
Insulation resistance	1011Ω min.
Contact resistance	100mΩ max. initial.
Dielectric Strength	250 V AC(1mm)
Travel	0.3±0.1mm
Storage Temperature	-30° C to 85° C


Mechanical

ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COL OR
E	Button	PPA	1	Black
D	COVER	Brass	1	Cleaning
C	DOME	Stainless Steel	1	Plated Ag
B	HOUSING	PPA	1	Black
A	PIN	PHOSPHOR BRONZE	1	Plated Ag

Type	Operatin g Force(gf)	Heiht mm	Button	Leads Shape (G, J, T)	Ground pin (0, 1)	Pegs Option (0, 1)
BTSOF002	250±50	Q 15.0	B (BLACK)	G	0 (None)	0 (None)
		P 13.0				
		O 12.0				
		N 11.0				
		S 10.5				
		M 10.0				
		R 9.5				
		L 9.0				
		K 8.5				
		J 8.0				
		H 7.5				
		G 7.0				
		F 6.5				
		E 6.0				
1	160±50	D 5.5				
		C 5.0				
		B 4.5				
		A 4.3				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF Bozhong TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED.

X. ±0.50	X.° ±2°	UNITS mm
.X ±0.30	.X° ±1°	MAT'L
.XX ±0.10	.XX° ±0.5°	
.XXX ±0.05		
FINISH		
Q'TY		

 东莞博众 —DGBZ ELECTRIC—		东莞市博众电气有限公司 Dongguan Bozhong Electrical Co., Ltd			
PART NO. BTSOF002		TITLE: TACTILE SWITCH 12x12			
APPD: ROGER		DWG NO. : BTSOF002			
CHKD: ROC					
DR: BILLY WANG 2020/08/21			SCALE 1/1	SHEET 1/1	REV. A1

Packaging:
A reel of 500 pieces