

566376-000

✓ ACTIVE

RAYCHEM | RAYCHEM GelCap

TE Internal #: 566376-000

Joints & Splices, AMERICAS, Cold Shrink / Cold Applied,  $\leq 1$  kV,  
Motor Connection Kit, Cross-Section 1.5 - 5 mm<sup>2</sup>, RAYCHEM  
GelCap

[View on TE.com >](#)[Energy & Power > Power Cable Accessories > Joints & Splices](#)Joints & Splice Product Availability: **AMERICAS**Installation Instruction: **English**Joints & Splice Technology: **Cold Applied, Cold Shrink**Joints & Splice Voltage Class:  $\leq 1$  kVJoints & Splice Product Type: **Motor Connection Kit**

## Features

### Product Type Features

Component Design	PowerGel Sealing Gel
Adhesive Coating	Silicone Gel
Joints & Splice Technology	Cold Applied, Cold Shrink
Joints & Splice Product Type	Motor Connection Kit

### Electrical Characteristics

Joints & Splice Voltage Class	$\leq 1$ kV
-------------------------------	-------------

### Body Features

Flexibility	Semi-Flexible
-------------	---------------

### Mechanical Attachment

Mechanical Reinforcement	Molded Cap Clamp
--------------------------	------------------

### Dimensions

Bolt Width (Max)	10 mm[.375 in]
Lug Barrel Length (Max)	13 mm[.5 in]
Bolt Length (Max)	13 mm[.5 in]
GelCap Length (Nominal)	71 mm[2.8 in]
Lug Overall Length (Max)	25 mm[1 in]
Conductor Range (Main)	16 - 10 AWG

Cross-Section Range	1.5 - 5 mm <sup>2</sup>
Cable Cross-Section (Max) (Main)	5 mm <sup>2</sup>
Cable Cross-Section (Min) (Main)	1.5 mm <sup>2</sup>

### Usage Conditions

Chemical Resistance	ASTM D543, Sulfuric Acid, Sodium Hydroxide, Transformer & Motor Oil
Environmental Resistance	ASTM D1149, 168 Hours @40°C, 50 ppm
Operating Temperature Range	-40 - 105 °C

### Operation/Application

Thermal Resistance	Applicable for Low Temperatures, Applicable for High Temperatures, Flame-Retardant
Mechanical Resistance	Abrasion Resistant (2040 gm wt, 4000 cycles, 5% max thickness loss), Against Mechanical Impact or Damage
UV-Stabilized	ASTM G53, UVB, 4000 hours, 4 hour on/off cycle

### Industry Standards

UL Rating	UL 486A-486B
Standards	ANSI C119.1

### Product Availability

Joints & Splice Product Availability	AMERICAS
--------------------------------------	----------

### Packaging Features

Packaging Quantity	1
Packaging Method	Bag
Standard Pack	5

### Other

Product Use	PowerGel-filled cap for motor lead and stub splice connections
Installation Instruction	English

### Product Compliance

For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2024

(240)

Candidate List Declared Against: JAN 2021

(211)

Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I  $< 900$  ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 292284-000  
GELCAP-4(B5)



TE Part # 632692-000  
GELCAP-3(B5)



TE Part # 986734-000  
GELCAP-2(B5)



TE Part # F40658-000  
GELCAP-SL-2/0-3HOLE(B10)




TE Part # CP1967-000  
GELCAP-SL-2/0-3HOLE-B100




TE Part # 1710501-1  
GELPACT-SMY

## Also in the Series | RAYCHEM GelCap

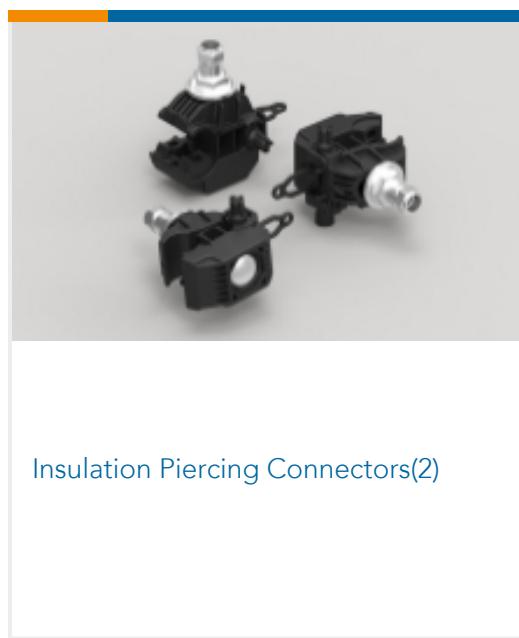

Insulation Piercing Connectors(2)

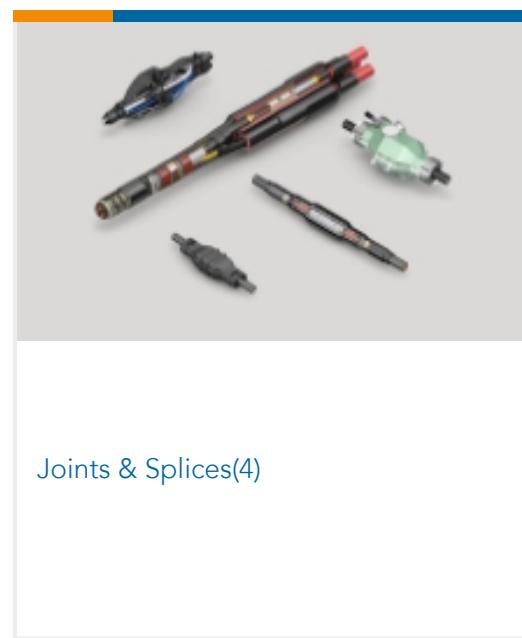

Joints &amp; Splices(4)

## Customers Also Bought

TE Part # 829367-000  
AUST-JT1TE Part # CU0355-000  
MXSU-12B/3XU-3SBTE Part # CA8322-000  
EPPA-060-450-1200TE Part # C25504-000  
NHVT-82GTE Part # 311492-000  
#102/1TE Part # 540916-000  
BLD/100TE Part # 509276-000  
BTSG6.3/100TE Part # 114016-000  
YQC9.3/50TE Part # 015896-000  
YRSGM10/50TE Part # 604814-000  
BFM5L/100

## Documents

### Datasheets & Catalog Pages

**GELCAP-MOTOR-CONNECTION-CABLE-ACCESSORIES**

English

### Instruction Sheets

#### Instruction Sheet (U.S.)

English