
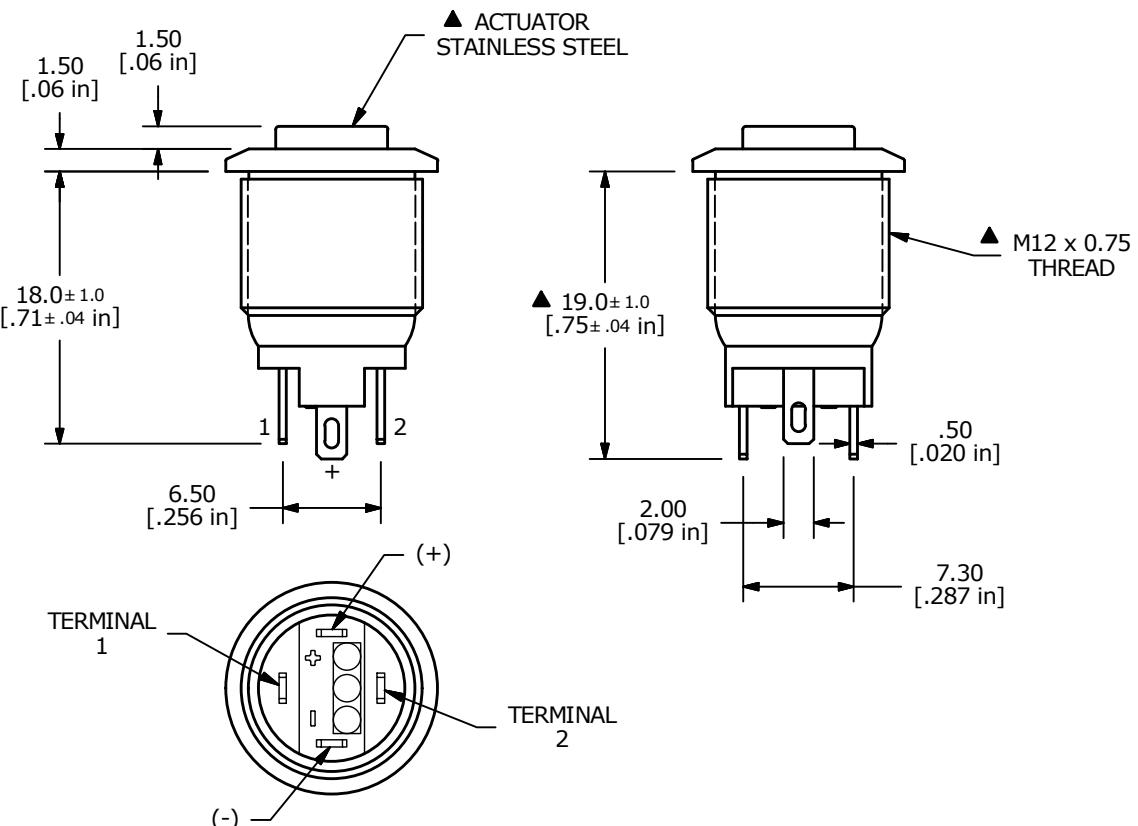


▲ SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)

OPEN 1-2  
(ON) = MOMENTARY

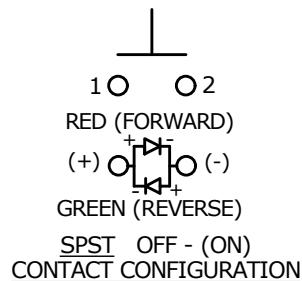

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. TERMINAL NOS. FOR REF. ONLY
4. RATING: 2A @ 36VDC
5. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
6. INSULATION RESISTANCE: 1,000MΩ @ 500VDC
7. DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
8. ELECTRICAL LIFE: 200,000 CYCLES
9. CONTACT MATERIAL: SILVER
10. OPERATING TEMPERATURE: -20°C to 55°C
11. INGRESS PROTECTION: IP65
- ▲ 12. LED VOLTAGE: 1.8V 20mA (Forward), 2.8V 20mA (Reverse)
- ▲ 13. ▲ DENOTES CRITICAL PARAMETER
14. 2011/65/EU (ROHS) COMPLIANT
15. HARDWARE INCLUDED: HEX NUT AND O-RING (NOT SHOWN)

B	23192	UPDATED THREAD FROM ..0.5 TO ..0.75	1/29/18	MJR
A	23034	Release For Production	10/6/17	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE PV0H240SS-3G1				
SCALE	2:1	DATE	10/6/2017	DR MW DWG 52-PV0H240SS3G1 REV B