

**HSF** RoHS **c** **RoHS** **us** **CE**

**SPECIFICATIONS**

Rated(额定参数): 300V,8A  
 Dielectric strength(抗电强度): AC1500V/1 Minute  
 Insulation Resistance(绝缘电阻):1000MΩ Min  
 Contact Resistance(接触电阻):20mΩ Max  
 Screw Torque(扭矩): 0.2Nm (1.7Lb.in)  
 Wire Range(线径):16~28AWG  
 Strip length(剥线长度):6~7mm  
 Temp. range(操作温度): -40℃~+105℃  
 MAX Soldering(瞬时温度):+260℃,5s

Housing Material(塑件): PA66 (UL94 V-0)  
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀镍)  
 Clamp(方块): Brass(黄铜), Ni plating(镀镍)  
 Screw (螺丝): M2.0 Steel, Zinc plating(钢,镀锌)

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
T0	OVER	OVER	T0	OVER	OVER	OVER	OVER
6	6	10	30	30	60	100	150
	T0	T0	T0	T0	T0	T0	T0
	10	24	30	60	100	150	150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

**Ordering Information**






**JL15EDGKA - XXX XX G X 1**

Pitch  
350=3.5PH  
381=3.81PH

No.of pins  
2P,3P,4P~24P

Housing Color  
B=Black  
G=Green  
U=Blue  
R=Red  
W=White  
Y=Yellow  
O=Orange  
E=Grey

Packing  
O=Pe bag  
T=Tube  
A=Tray

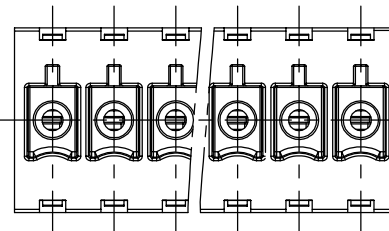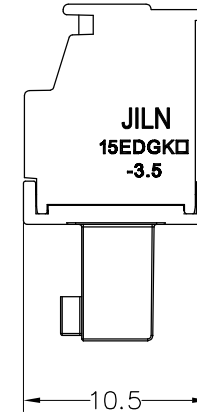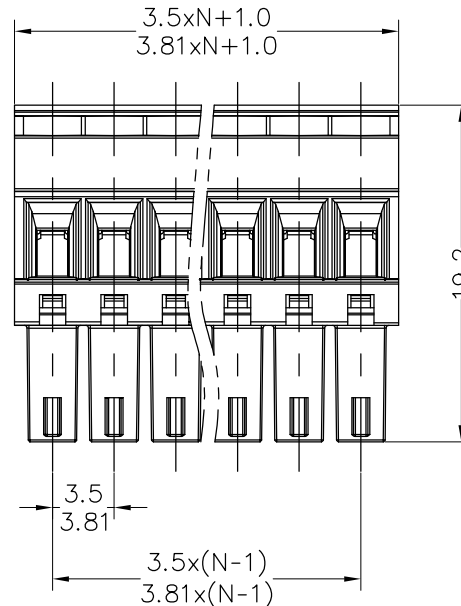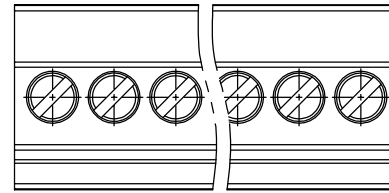

OPERATION	DRAW	iyusheng	20.03.03	SCALE	FIT
X.X ±0.30	CHECK			UNIT	mm
X.XX ±0.20	APPROVE			SIZE	A4
X.XXX ±0.10				SHEET	1/1
Angle ±3°				PROJ.	
DIM TOL					

**JILN**® 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

A0	2020.03.03	NEW DRAWING				PART NO.	JL15EDGKA-XXXXXGX1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE			TITLE:	3.5/3.81 Pitch Female Pluggable Terminal Blocks