
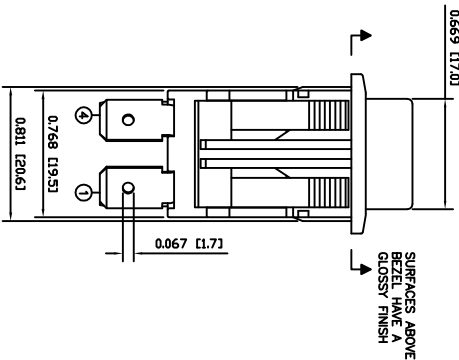




MATERIALS		SPECIFICATIONS	
BODY: Polyamide 6/6 (PA66), UL94 V-2		FUNCTION: 2P1T OFF-ON	
ACTUATOR: Polyamide 6/6 (PA66), UL94 V-2		RATINGS: ANSI/UL 508 and CAN/CSA C22.2 No.14 (E195908): 20A 125VAC [cULRu] 15A 277VAC [cULRu] 2HP 110/250VAC [cULRu]	
SEALING MEMBRANE: Polyvinyl Chloride (PVC)		CONTACT RESISTANCE: Initial: 10mΩ Max. Electrical Life: [cULRu] 6,000 Cycles [cULRu]	
SPRING: Phono Wire		TEMPERATURE: Operating: 0°C to 40°C [cULRu]	
MOBILE CONTACT BAR: Copper		INGRESS PROTECTION: IP54	
CONTACT PADS: Silver Clad Copper		APPROVALS:  RoHS COMPLIANT	
RIMETS: Copper			
TERMINALS: Brass			

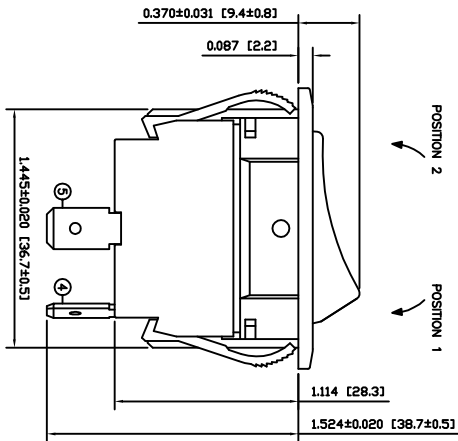

COLORS AND MARKINGS

BODY COLOR:
Black
ACTUATOR COLOR:
Black
MARKING:
None
MARKING COLOR:
None

SCHEMATIC

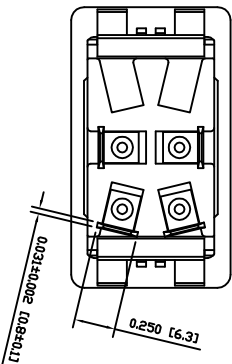

ACTUATOR		REV.	
B	10/05/28	CAB	
B	10/05/28	CAB	
A	09/06/15	CAB	
C	10/03/01	CAB	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

REV.

INITIAL RELEASE DESCRIPTION

PCB

DATE

DRAWN BY

DIMENSIONS	
INCHES [MILLIMETERS]	
GENERAL TOLERANCES	±0.008 [±0.2] / ±1°
SCALE	DRAWING NOT TO SCALE

**E-SWITCH**

**LAMB**
INDUSTRIES

RWMC42D1100

DRAWING NUMBER

34-RWMC42D1100

DATE

SEPTEMBER 7, 2011

VERSION

A