

HSF

NOTES:

- Current Rating: 1.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+33%GF UL94V-0

Ordering Information

2344-2 XX M XX CUN X 4

No. of Pins per Row: 02-50Pin


Contact Plating:
G0=Gold Flush
G3=10μ" Gold
G4=15μ" Gold
G5=30μ" Gold
S0=Gold Flash/Tin
S3=10μ" Gold/Tin
S4=15μ" Gold/Tin
S5=30μ" Gold/Tin
SN=Tin

Packing:
T=Tube
P=Tray+CAP
R=Tape&Reel+CAP

Item	Pitch	Mating
Standard	1.27	1310/1315/1320/3131/3133/3100
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A5	2023/02/03	Modify Flatness	-----
A4	2016/06/17	Modify CAP 3.00 → 3.40	-----
A3	2014/12/30	Modify CAP	-----
A1	2012/09/05	Add C0.3	-----

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

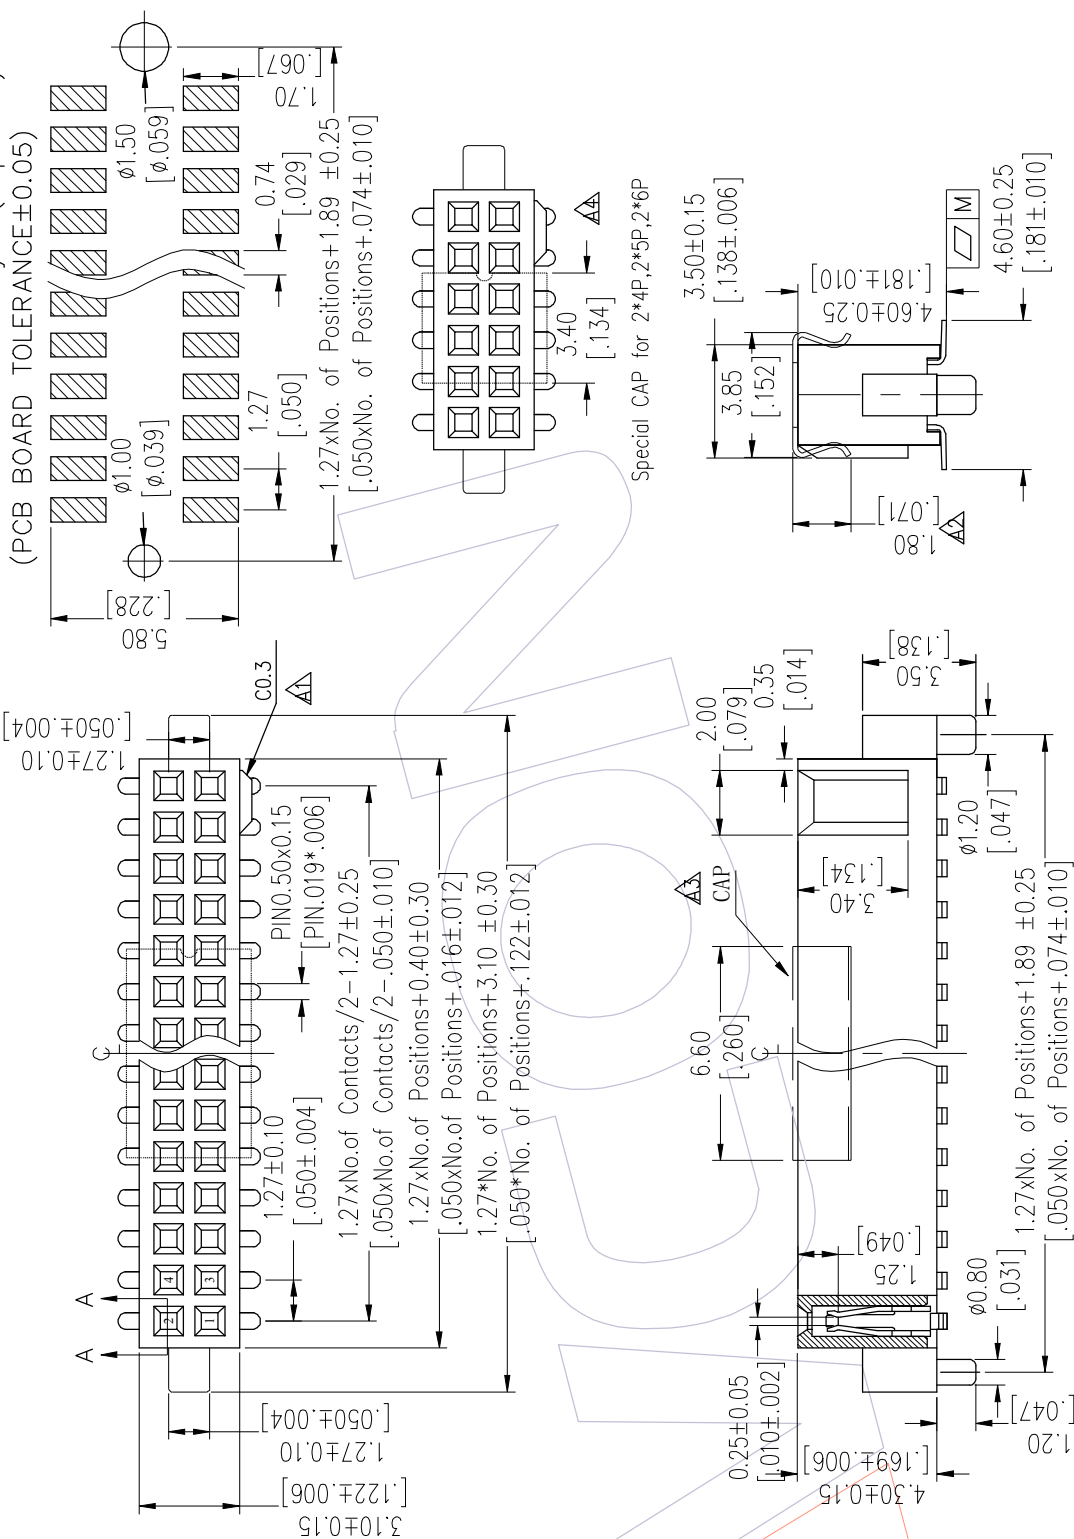

SECTION A-A

Pin(Per Row)	2-15P	16-30P	31-50P
M	0.10	0.15	0.18

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
X.X	XSR	2023/02/03	UNIT	mm	2344-2XXMXXCUNX4
X.XX	CHECK	DATE	SIZE	A4	TITLE: 1.27mm Female Header DUAL SMT WITH DIFFERENT POST AND BUMP
X.XXX	APPROVE	DATE	SHEET	1/1	Customer NO.
Angle ± 3'			PROJ.		

WCON
 Http: www.wcon.com
 WCON-Dongguan
 WCON-Kunshan
 Tel: +86 769 85358920
 Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: sales@wcon.com