


FO-55111-A

HONEYWELL
PART NUMBER

41SM30-H58

PRODUCT CODE
TYC2525

REV	DOCUMENT	CHANGED BY		CHECK
3	0038112	KVS	04JUN08	ASD

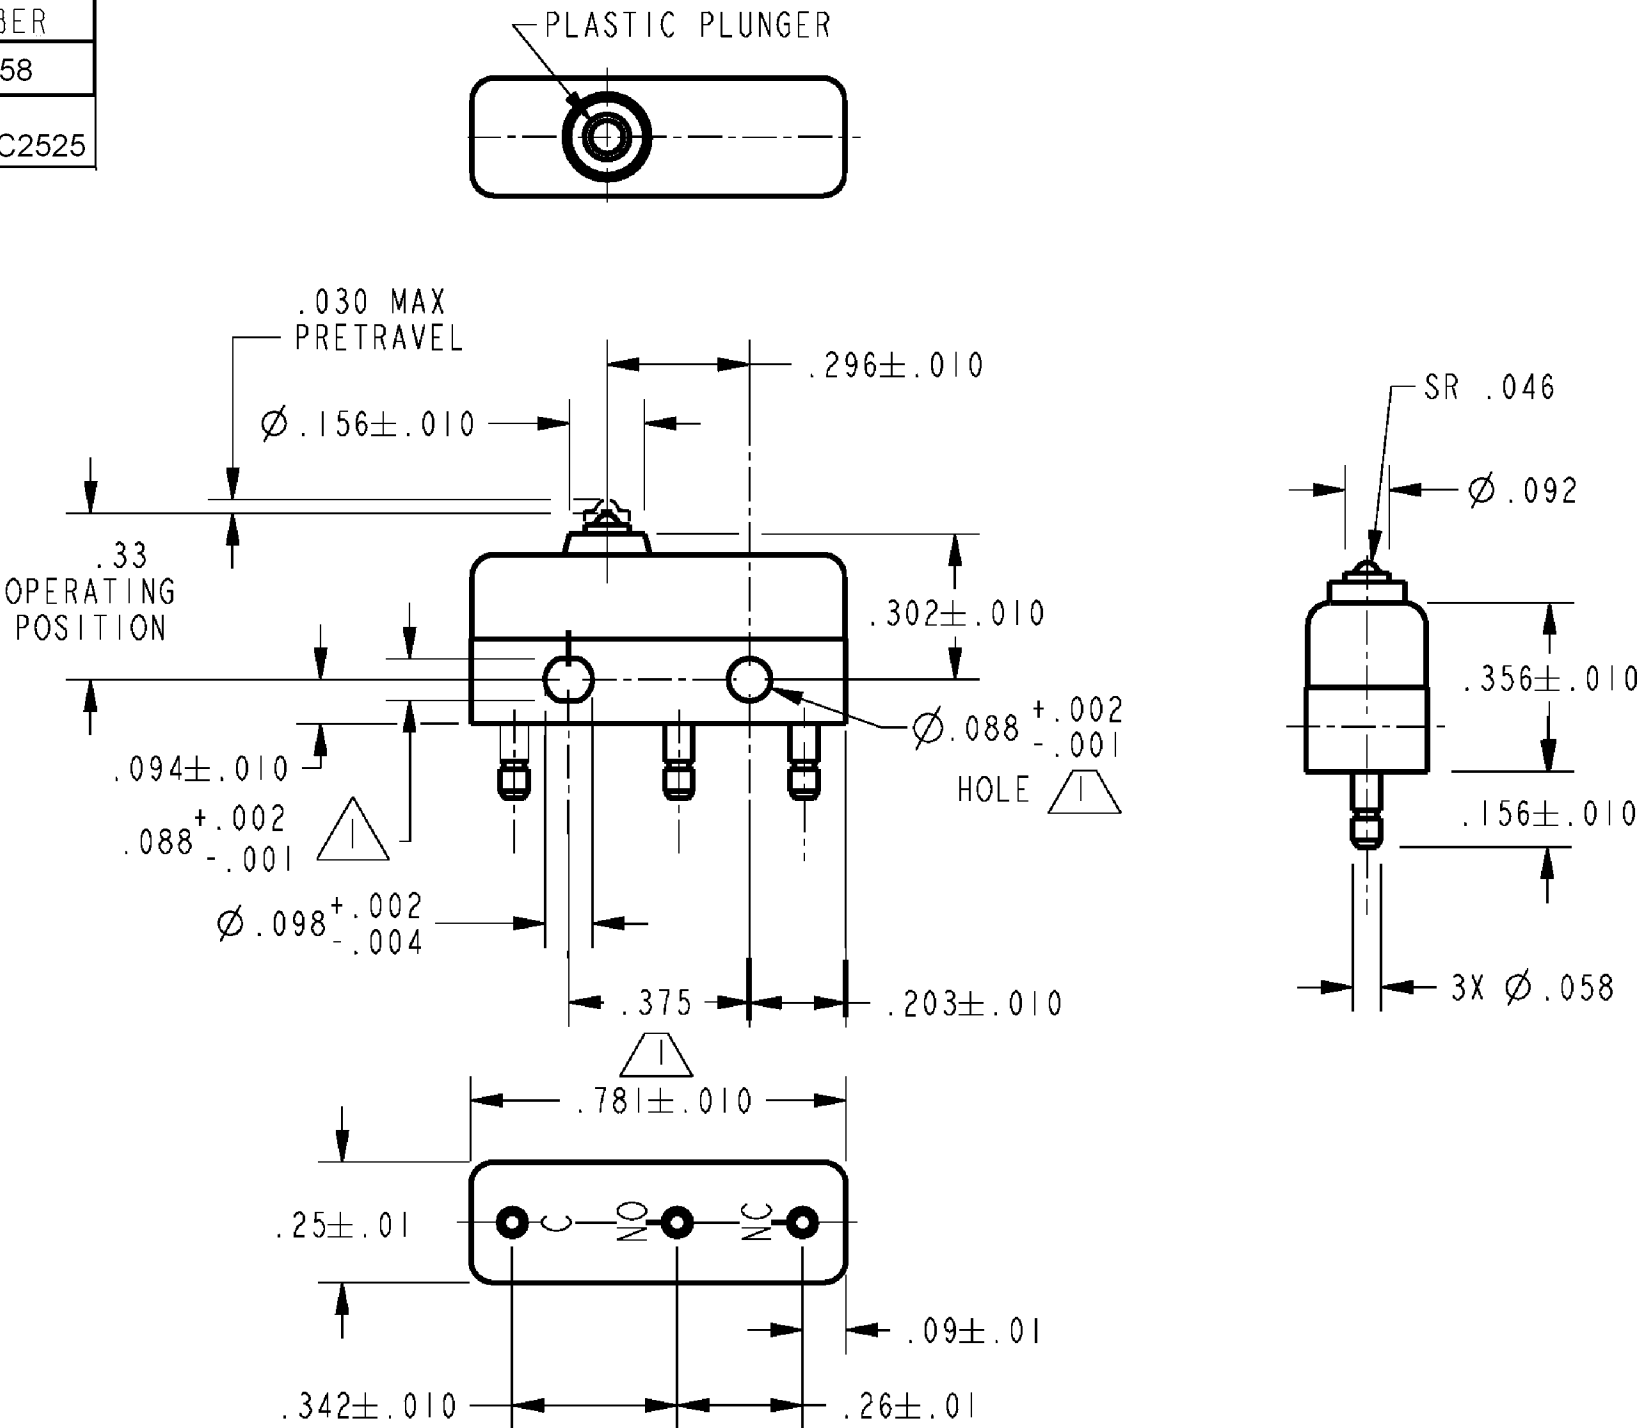

NOTES

MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .375 ± .002 CENTERS

RELEASE NO.	PR - 23411
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH				DRAWN	VK	25 OCT 07		Honeywell				
OPERATING FORCE – – – 3 – 5 OZ		CONTACT ARRANGEMENT SPDT				TOLERANCES UNLESS NOTED:				CHECK	RJ	25 OCT 07						
RELEASE FORCE – – – – – 1 OZ MIN		APPROVALS KEMA, CE 11A 250V ~ T85 1E4 5A 30 Vdc T85 1E4 				NO PLACE X ± -				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC				
DIFFERENTIAL TRAVEL – – – .003 MAX						ONE PLACE .X ± 0.030												
OVERTRAVEL – – – – – .005 MIN		TWO PLACE .XX ± 0.015				THREE PLACE .XXX ± 0.005												
		UL, CSA				FOUR PLACE .XXXX ± -				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME		REV
						THIRD ANGLE PROJECTION 				RASTER				B	I	41SM30 - H58		3
														SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1	