

REV	LOCAS	DESCRIPTION	DRAW	DATE
01	NEW	INITIAL RELEASE	LIU	2020.05.10
02		更改电镀方式	LIU	2022.03.30

PRODUCT NO.

1. SPECIFICATIONS:



- 1.1. CONTACT RESISTANCE:80 mΩ MAX
- 1.2. VOLTAGE RATING:15V/AC/DC/MAX
- 1.3. CURRENT RATING:1.0A/MAX
- 1.4. PRE-LOAD FORCE:0.5±0.1N ON CONTACT POINT
- 1.5. MAX.BEAM DEFLECTION:0.7±0.1N ON CONTACT POINT
- 1.6. DURABILITY:2000 CYCLES
- 1.7. OPERATING TEMPERATURE:-25°C~85°C

2. MATERIAL:

- 2.1. STEEL SUS304 T=0.08±0.005MM

3. FINISH:

- 3.1. 1u"AU ON CONTACT AREA
GOLD FLASH PLATING ON SOLDER AREA
80u" MIN. NICKEL UNDERPLATING OVERALL

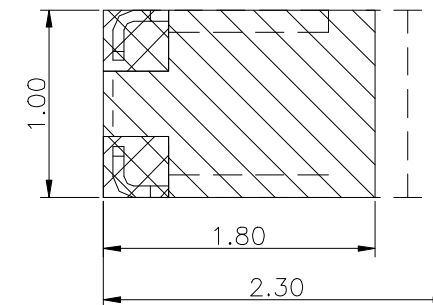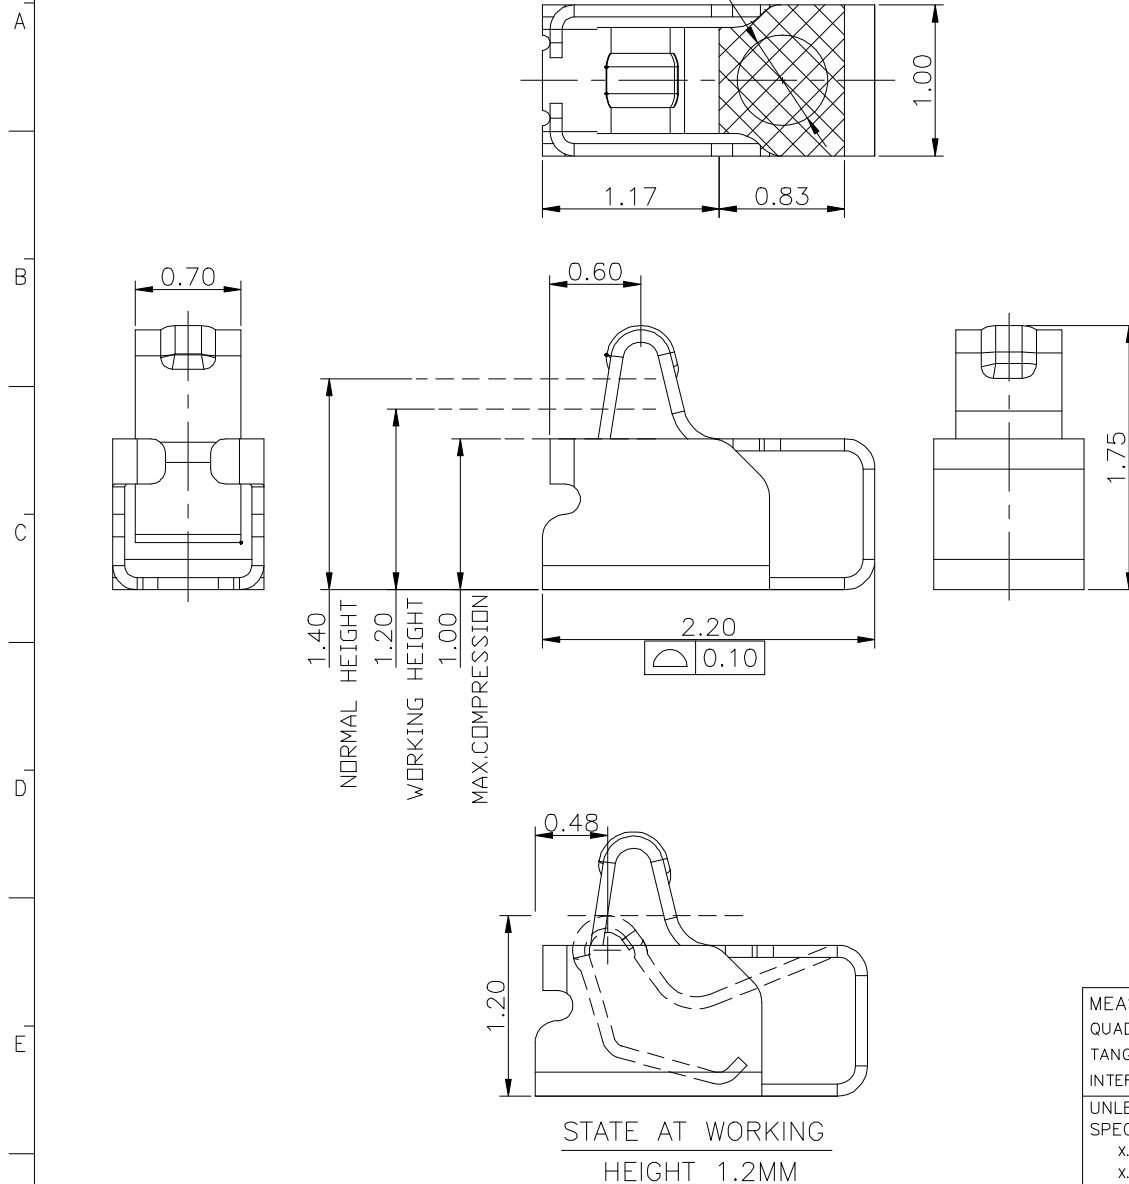

MEASURE POINT:		 D-CHAIN DongGuan D-CHAIN Precision Components CO,Ltd		TITLE: ANTENNA RF SPRING SMT (L2.2*W1.0*H1.75mm)	
QUADRANT POINT (QP)					
TANGENCY POINT (TP)					
INTERSECTION POINT (IP)					
UNLESS OTHERWISE SPECIFIED,TOLERANCE:		DESIGN	LIU	DATE	2020.05.10
X. ±0.25		CHECKED		DATE	
X.x ±0.20		APPROVED		DATE	
X.xx ±0.15		PART NO: RA0102000175-107			
ANGULAR ±3'		DRAWING NO:			
		REV: 02		SCALE: 1:1	UNIT: mm
		SIZE: A4		SHEET: 1/1	