




+ CONNECTORS

WIRE-TO-BOARD CONNECTOR CONTACTS

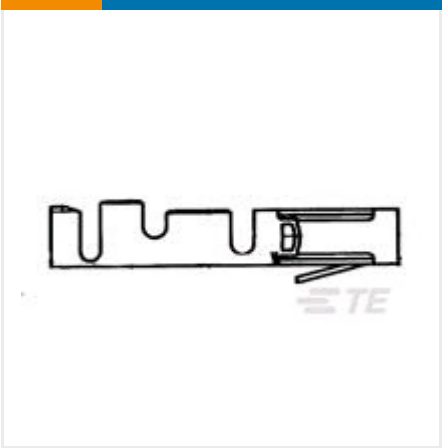

✓ Active

TE CONNECTIVITY (TE)
AMPMODU II CONTACT RECEPTACLE

AMPMODU | AMPMODU IV/V

280422-1
TE Internal Number: 280422-1

EU RoHS Compliant
EU ELV Compliant

Contact Type Socket
Wire/Cable Size (AWG) 30 – 28
Wire/Cable Size (mm²) .05 – .09
Contact Mating Area Plating Material Gold
Packaging Method Strip

↓ PRODUCT DRAWING
English

↓ 3D PDF

DOCUMENTATION

Product Drawings

AMPMODU 2 REC CONTACT STD PRESSURE C.O.S.I.

PDF (TIFF AVAILABLE)

English

CAD Files

Customer View Model

3D_IGS.ZIP

English

Customer View Model

3D_STP.ZIP

English

Customer View Model

2D_DXF.ZIP

English

3D PDF

PDF

English

Product Specifications

Application Specification

AMPMODU Mod.II Interconnection System, Receptacle Contact

PDF

English

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

- Connector & Contact Terminates To Wire & Cable
- Wire/Cable Type Discrete Wire
- Product Type Contact
- Applied Pressure Standard
- With Insulation Support Yes

Contact Features

- Contact Type Socket
- Contact Mating Area Plating Material Gold
- Crimp Area Plating Material Gold Flash
- Contact Base Material Phosphor Bronze
- Contact Mating Area Plating Thickness (µin) 15

Termination Features

- Termination Method to Wire/Cable Crimp

Dimensions

- Wire/Cable Size (AWG) 30 – 28
- Wire/Cable Size (mm²) .05 – .09
- Insulation Diameter .64 – 1.27 mm [.025 – .05 in]

Packaging Features

- Packaging Method Strip
- Packaging Quantity 10000

PRODUCT COMPLIANCE



Statement of Compliance

Statement of Compliance

PDF
