


**Straddle Mount Pin Header Assemblies with Anodized Pin Protectors —
MIL-C-55302 Qualified**



Related Product Data

Mates with — Receptacles,
pages 6053 and 6054

External Keying — page 6091

Recommended PC Board Layout —
page 6058

**Commercial Pin
Header Assemblies**

Housing Material — In accordance
with MIL-C-55302 or MIL-M-24519
Type GLCP-30F

Pin Protector Material — Anodized
aluminum per QQ-A-250/1




Contact Material and Finish —
Brass per QQ-B-626 plated .000030
[0.00076] gold in the contact area,
.000100 [0.00254] tin-lead on the tabs
over .000050 [0.00127] nickel on the
entire contact.

**Military Pin
Header Assemblies**

Housing Material — In accordance
with MIL-C-55302 or MIL-M-24519
Type GLCP-30F

Pin Protector Material — Anodized
aluminum per QQ-A-250/1

Contact Material and Finish — Brass
per QQ-B-626 plated .000050
[0.00127] gold in the contact area,
.000100 [0.00254] tin-lead on the tabs
over .000050 [0.00127] nickel on the
entire contact.

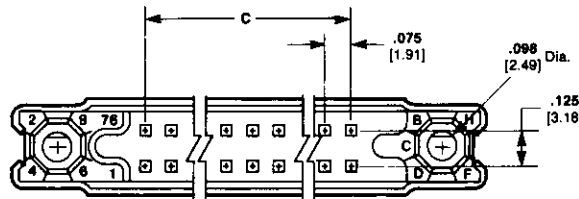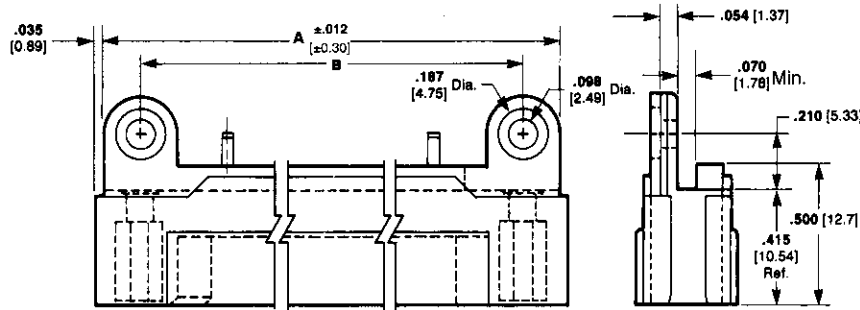

No. of Pos.	Dimensions			Military Pin Header	
	A	B	C	M55302/	AMP Part No.
180	7.630 193.8	7.340 186.44	6.675 169.55	23-30	530785-4
160	6.880 174.75	6.590 167.39	5.925 150.5	23-29	530785-5
150	6.505 165.23	6.215 157.86	5.550 140.97	23-28	530785-2
120	5.380 136.65	5.090 129.29	4.425 112.4	23-27	530785-6
110	5.005 127.13	4.715 119.76	4.050 102.87	23-26	530785-7
100	4.630 117.6	4.340 110.24	3.675 93.35	23-25	530785-8
90	4.255 108.08	3.965 100.71	3.300 83.82	23-24	1-530785-7
80	3.880 98.55	3.590 91.19	2.925 74.3	23-23	530785-9
70	3.505 89.03	3.215 81.66	2.550 64.77	23-22	1-530785-0
60	3.130 79.5	2.840 72.14	2.175 55.25	23-21	1-530785-1
50	2.755 69.98	2.465 62.61	1.800 45.72	23-20	1-530785-2
40	2.380 60.45	2.090 53.09	1.425 36.2	23-19	1-530785-3
30	2.005 50.93	1.715 43.56	1.050 26.67	23-18	1-530785-4
20	1.630 41.4	1.340 34.04	.675 17.15	23-17	1-530785-5
10	1.255 31.88	.965 24.51	.300 7.62	23-16	1-530785-6

Printed Circuit Board Connectors