
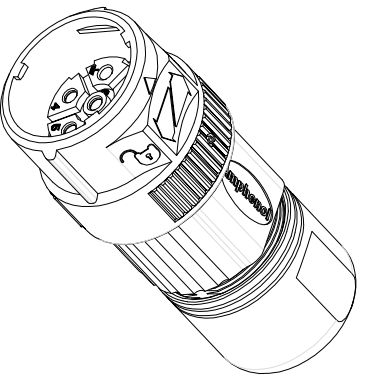
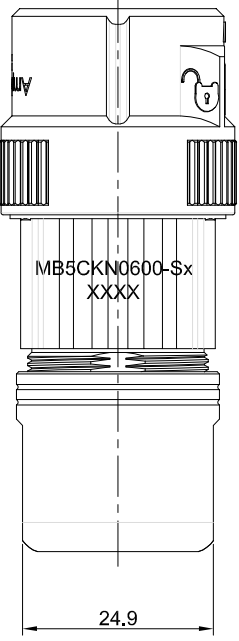
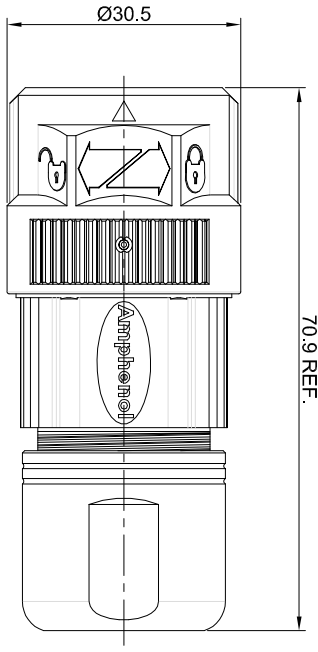


REVISIONS

REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	FIRST RELEASE	Sep:15:2015	Drack	Tommy
A2	-	UPDATED COUPLING NUT	Oct:26:2015	Drack	Tommy



Item	Part number	Cable OD Range
1	MB5CKN0600-S1	7.5~11.0 mm
2	MB5CKN0600-S2	11.0~14.5 mm
3	MB5CKN0600-S3	14.5~17.0 mm

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:
INSULATION INSERT: PA66, UL94 V0
SEAL: VITON, EPDM
HOUSING BODY: ZINC DIE CAST, NICKEL PLATED
COUPLING NUT: ZINC DIE CAST, NICKEL PLATED
2. SPECIFICATIONS:
2.1 CURRENT RATING: 28 AMPS
2.2 VOLTAGE RATING: 630V AC/DC
2.3 OPERATING TEMPERATURE: -20°C TO +130°C
2.4 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 6000 VOLTS AC.
2.5 DEGREE OF PROTECTION: IP67 (MATED CONDITION)
2.6 DEGREE OF POLLUTION: 3 PER UL840
2.7 OVERVOLTAGE CATEGORY: III PER UL840
2.8 MATING CYCLE DURABILITY: >500 CYCLES
2.9 RoHS COMPLIANT
3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

QUANTITY	SEE PART NUMBER CHART	PART NUMBER	DESCRIPTION	ITEM

MATERIALS LIST

SIGNATURES	DATE	SIZE	TYPE	DWG NO.	REVISION
Drack	Oct 26, 2015	B	C-	MB5CKN0600-Sx	A2

Amphenol
Site Systems - www.amphenol-site.com
44724 Morley Drive
Clifton Township, MI 48036

UNLESS OTHERWISE SPECIFIED
1) All dimensions are in millimeters.
2) Tolerances are as follows:
A Radial: ±0.15
B Pl. DEC: ±0.08
3) Note reference =
MATERIAL SPECIFICATIONS:
CUSTOMER: M23B PLUG, STR, 6POS, CHECKMATE
PROCESS SPECIFICATIONS:
NEXT ASSY: