
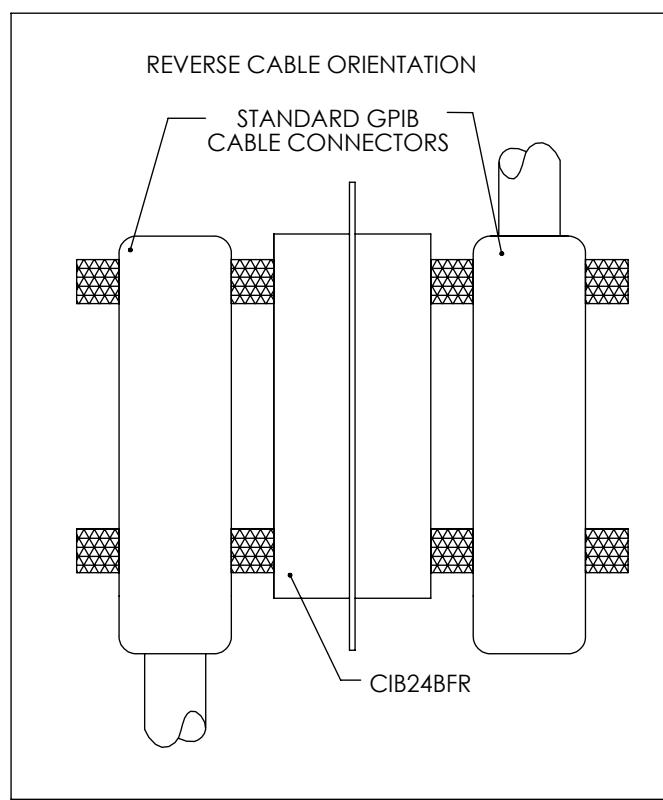


REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	RELEASED TO PRODUCTION	5/24/01	R.CARRICK
B	CORRECTED ORIENTATION OF CONNECTOR (ECN# 1346)	3/27/03	T.CLARK
C	ECN 3062: REVISED DIM. 910 WAS .930	10/30/07	D.FRISIELLO
D	ECN 3322: UPDATE DWG FORMAT	5/12/08	D.GRIFFIN

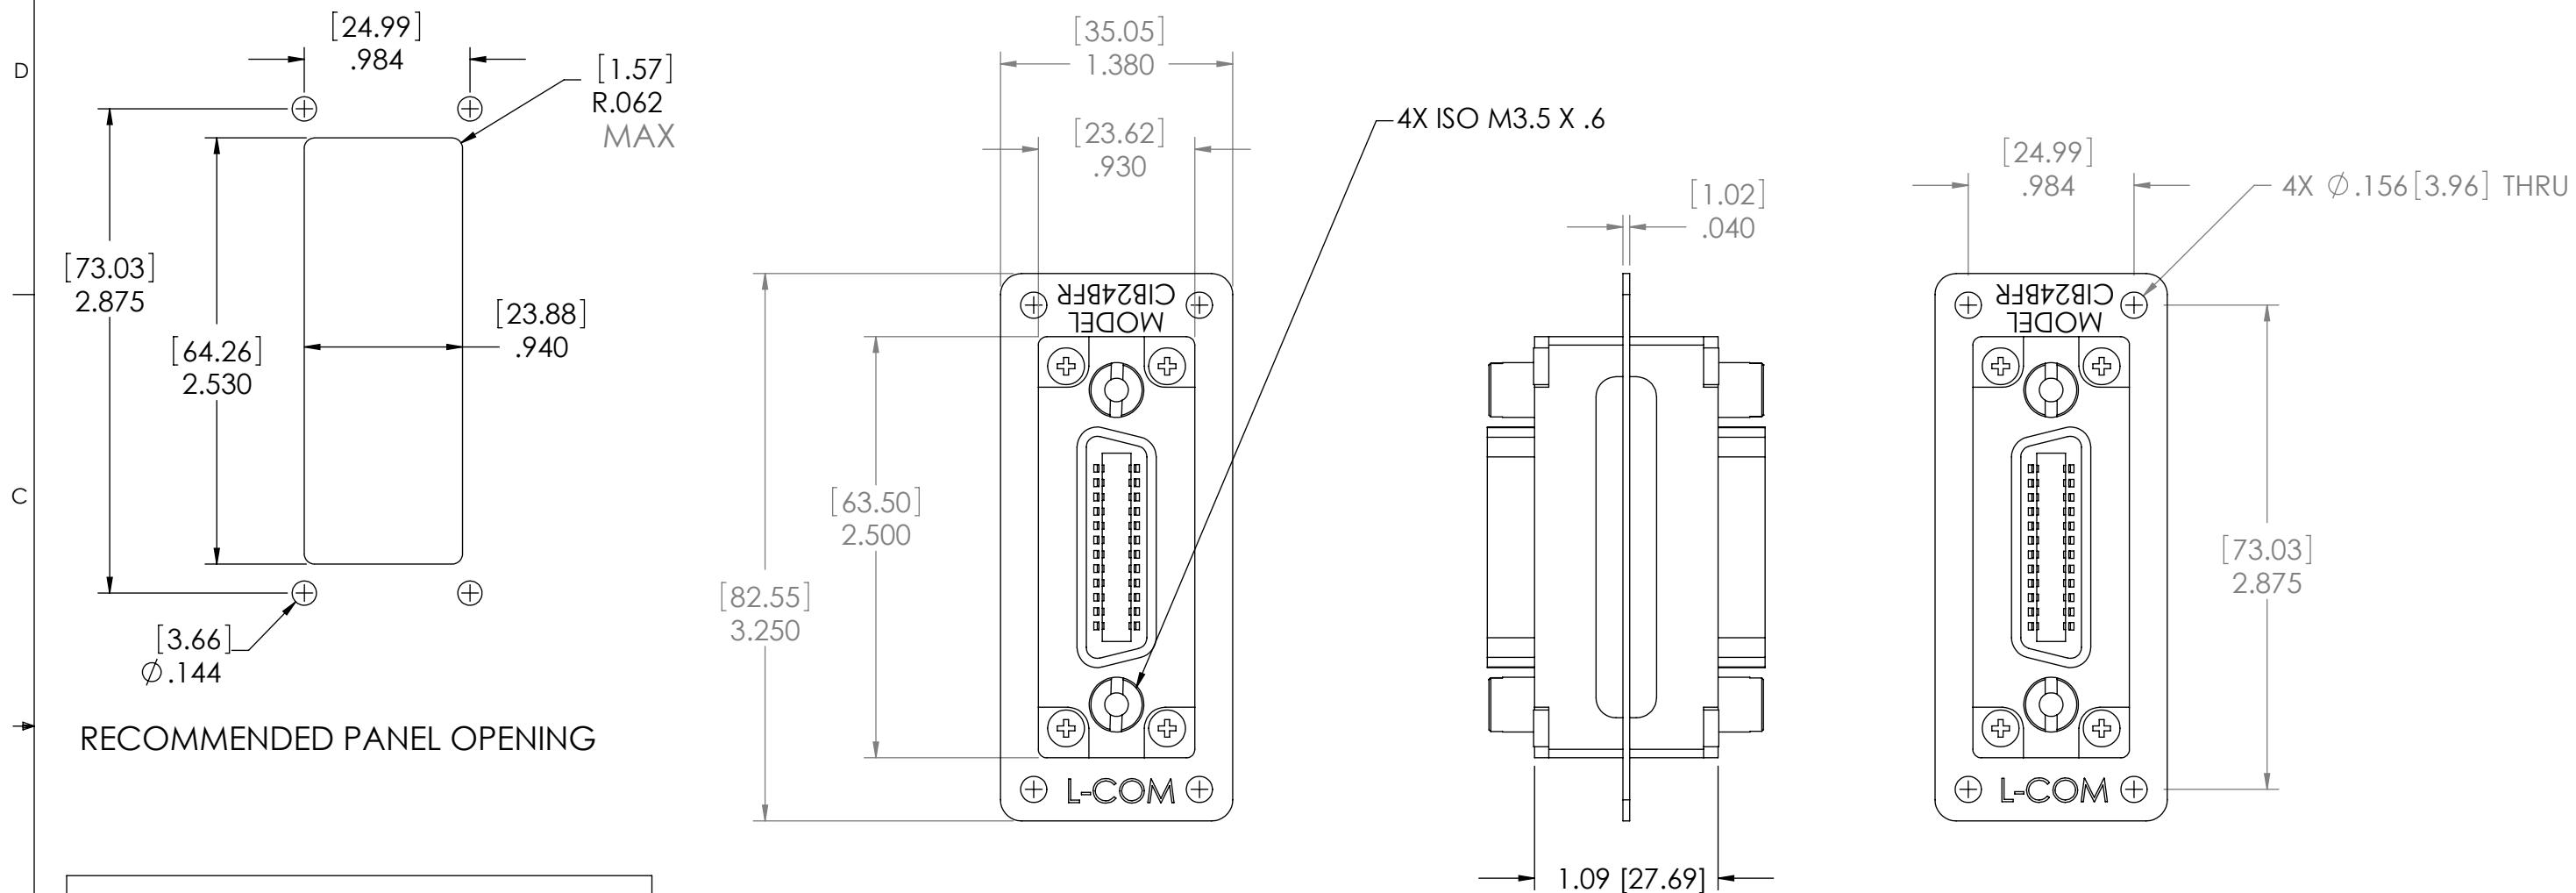

NOTES:

HOUSING: ALUMINUM ALLOY DIE CAST, NICKEL PLATED
JACKSCREWS STEEL, BLACK ANODIZED
MOUNTING FLANGE STEEL NICKEL- PLATED
INSULATOR MATERIAL: PBT
CONTACT PLATING 15u INCH GOLD PLATE OVER NICKEL.

PACKAGING:
INDIVIDUALLY PACKAGE IN A POLYBAG

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
 ≤ 12 [305] = $+125/-0$
 >12 [305] ≤ 160 [4064] = $+251/-0$
 >60 [1524] ≤ 120 [3048] = $+4/-0$
 >120 [3048] ≤ 300 [7620] = $+6/-0$
 >300 [7620] = $+5\%/-0\%$
ALL OTHER DIMENSIONAL TOLERANCES:
 $.X = .3$
 $.XX = .15$

CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY
PROJECTION
COLOR VARIATIONS
MAY OCCUR

L-com CONNECTIVITY PRODUCTS	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
CATEGORY	IEEE-488 GPIB
PRODUCT DESCRIPTION	REVERSING ADAPTOR GPIB BULKHEAD F/F
SIZE	FSCM NO.
B	43321
DWG. NO.	
CIB24BFR	D
REV.	
SCALE: 1:1	CAD FILE: CIB24BFR.SLDDRW
SHEET 1 OF 1	