RoHS compliant

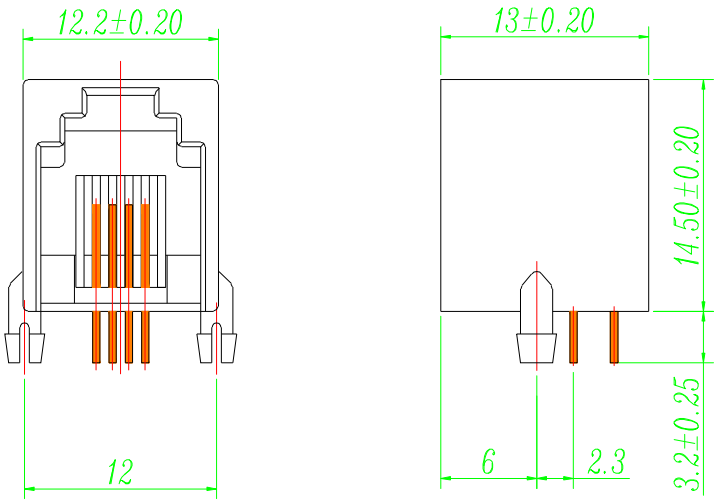


General Specification
Current Rating:1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃～+70℃
Industrial Temperature: -40℃～+85℃
Humidity: 20～70%
Contact Resistance:≤30mΩ
Insulation Resistance:≥500MΩ
Dielectric Strength:500V AC/(50HZ)/Min
Mating And Unmating Force:3～20N
Durability:750 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper
Please refer to the customer drawing when customer has specified

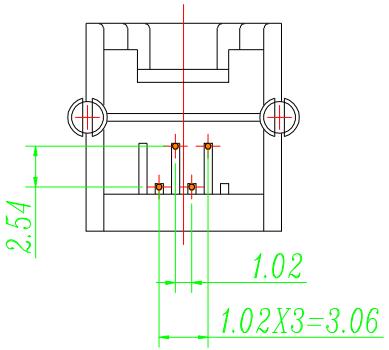


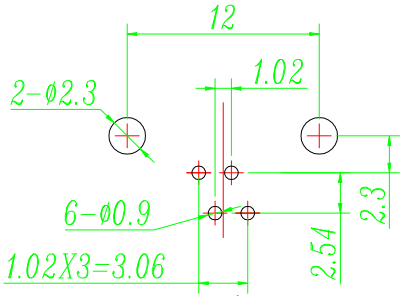


PC Board Layout
Top View

| 序号 | 名 称 | 材 料 | 数 量 | 镀层/颜色 | 备 注 |
|---|---|---|---|---|---|
| 2 | 插 针 | PHOSPHOR BRONZE | 4 | "FU" | |
| 1 | 塑 座 | PBT | 1 | BLACK | |

| 版次 | 变 更 履 历 | 变更单号 | 绘 制 | 日 期 |
|---|---|---|---|---|
| A/0 | 新 出 版 发 行 | | | |

禁止在图面上随意涂改

# 网络插座外形图

| | | | |
|---|---|---|---|
| 绘 图: | 吴素飞 | 日 期: | 2022.4.7 |
| 审 核: | 冯清德 | 日 期: | |
| 核 准: | 朱华生 | 日 期: | |

温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO.,LTD.

| 一般公差 | |
|---|---|
| >30～ | ±0.45 |
| >10～30 | ±0.35 |
| ～10 | ±0.25 |
| 角 度: | ±5° |
| 页 面: | 1 of 1 |

| | |
|---|---|
| 品 名: | RCH-55-A-6P4C(无耳) |
| 料 号: | 55A-40000030PB32 (WR44108) |
| 型 号: | RJ45 |
| 图 号: | |
| 版本: | |
| 单位:mm | 比例: 1:1 |
| 纸张: A4 | |

该 图 面 供 温 州 瑞 川 电 子 有 限 公 司 内 部 使 用, 不 得 私 自 复 印