
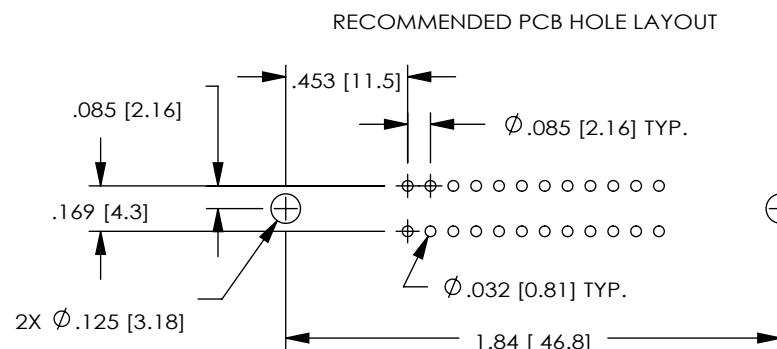
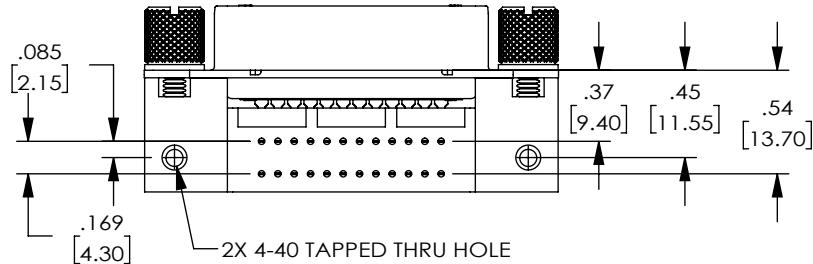
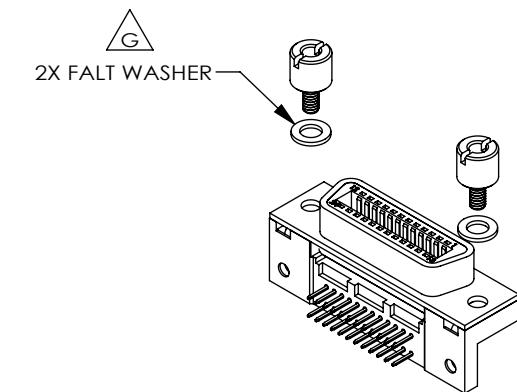


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

8 7 6 5 4 3 2 1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 5738: ADDED RoHS STAMP AND NOTE 6	09/27/2011	D.CASTRO
F	ECN 10946: REVISED 3D MODEL AND MOUNTING HOLE PATTERN	01/22/2021	MBLACKWOOD
G	ECN 11071: REVISE WASHER FROM "HELICAL" TYPE TO "FLAT" TYPE	04/07/2021	D.GUST

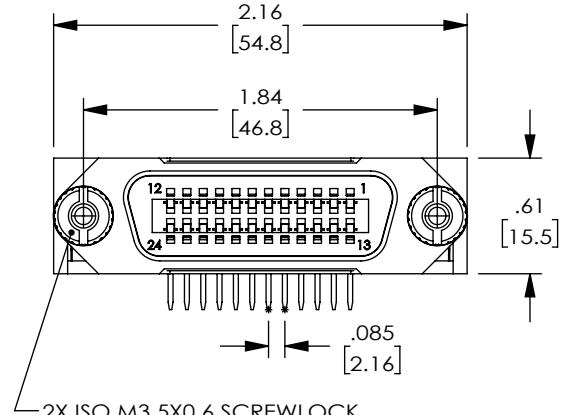

NOTES:

1. MATERIALS:  
SHELL: STEEL  
CONTACTS: PHOSPHOR BRONZE  
INSULATOR: BLUE POLYBUTYLENE TEREPHTHALATE (PBT)  
U.L. 94V-0 RATED

2. FINISHES:  
CONTACTS: GOLD PLATED  
TERMINALS: TINNED  
SHELL: NICKEL PLATED  
SCREWLOCKS: BLACK OXIDE

3. SUPPLIED WITH HARDWARE ASSEMBLED.
4. TYPICAL OPERATING VOLTAGE IS 30 VOLTS
5. MAXIMUM VOLTAGE RATING IS 500 VOLTS.
6. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:  
<12 [305] ≤60 [1524] = +1 [25] / -0  
>12 [305] ≤60 [1524] = +2 [51] / -0  
>60 [1524] ≤120 [3048] = +4 [102] / -0  
>120 [3048] ≤300 [7620] = +6 [152] / -0  
>300 [7620] = +5% / -0

ALL OTHER DIMENSIONAL TOLERANCES:  
.X = ± .2 [5]      FRACTIONS  
.XX = ± .02 [5]      ± 1/32  
.XXX = ± .005 [.13]      ANGLES ± 1°



APPROVALS

DRAWN BY  
T.CLARK

CHECKED BY  
D.PARHAM

APPROVED BY  
C.MCCORMICK

10/24/2001

10/25/2001

10/25/2001

DATE

10/24/2001

10/25/2001

10/25/2001



50 High Street, West Mill,  
North Andover, MA 01845 USA.  
Phone: 1.800.341.5266  
1.978.682.6936

CATEGORY

IEEE-488

PRODUCT DESCRIPTION

IEEE-488 SOCKET, RT. ANGLE PC TERMINALS

SIZE

A

CAGE CODE

43321

ITEM NO.

CIB24SRA

REV.

G

SCALE: NONE

CAD FILE: CIB24SRA.SLDDRW

SHEET 1 OF 1