



P-Channel Trench Power MOSFET

General Description


The JY3407 uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as -4.5V. This device is suitable for use as a load switch or in PWM applications.

Features


- $V_{DS} = -30V, I_D = -4.3A$
 $R_{DS(ON)} < 50m\Omega @ V_{GS} = -10V$
 $R_{DS(ON)} < 100m\Omega @ V_{GS} = -4.5V$
- High Power and current handling capability
- Lead free product is acquired
- Surface Mount Package

Application


- PWM applications
- Load switch
- Power management



Schematic Diagram



Marking and pin Assignment



SOT-23-3L top view

Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
3407	JY3407	SOT-23-3L	Ø180mm	8mm	3000 units

Table 1. Absolute Maximum Ratings ($T_A = 25^\circ C$)

Symbol	Parameter	Value	Unit
V_{DS}	Drain-Source Voltage ($V_{GS} = 0V$)	-30	V
V_{GS}	Gate-Source Voltage ($V_{DS} = 0V$)	± 20	V
I_D	Drain Current-Continuous	-4.3	A
$I_{DM (pulse)}$	Drain Current-Continuous@ Current-Pulsed (Note 1)	-30	A
P_D	Maximum Power Dissipation	1.5	W
T_J, T_{STG}	Operating Junction and Storage Temperature Range	-55 To 150	$^\circ C$

Notes 1.Repetitive Rating: Pulse width limited by maximum junction temperature

Table 2. Thermal Characteristic

Symbol	Parameter	Value	Unit
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	85	$^\circ C/W$



Table 3. Electrical Characteristics (T_A=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
On/Off States						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V I _D =-250μA	-30	-34		V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-24V, V _{GS} =0V			1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V			±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250μA	-1.4	-1.6	-2.4	V
g _{FS}	Forward Transconductance	V _{DS} =-5V, I _D =-4.3A	4			S
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =-10V, I _D =-4.3A		38	50	mΩ
		V _{GS} =-4.5V, I _D =-4A		60	100	mΩ
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} =-15V, V _{GS} =0V, f=1.0MHz		580		pF
C _{oss}	Output Capacitance			98		pF
C _{rss}	Reverse Transfer Capacitance			74		pF
Switching Times						
t _{d(on)}	Turn-on Delay Time	V _{DD} =-15V, I _D =-1A, R _L =15Ω V _{GS} =-10V, R _G =2.5Ω		5		nS
t _r	Turn-on Rise Time			6		nS
t _{d(off)}	Turn-Off Delay Time			28		nS
t _f	Turn-Off Fall Time			7		nS
Q _g	Total Gate Charge	V _{DS} =-15V, I _D =-4.3A, V _{GS} =-10V		10		nC
Q _{gs}	Gate-Source Charge			2		nC
Q _{gd}	Gate-Drain Charge			3		nC
Source-Drain Diode Characteristics						
I _{SD}	Source-Drain Current(Body Diode)				-4.3	A
V _{SD}	Forward on Voltage ^(Note 1)	V _{GS} =0V, I _S =-1A		-0.82	-1	V

Notes 1. Repetitive Rating: Pulse width limited by maximum junction temperature.



Switch Time Test Circuit and Switching Waveforms:

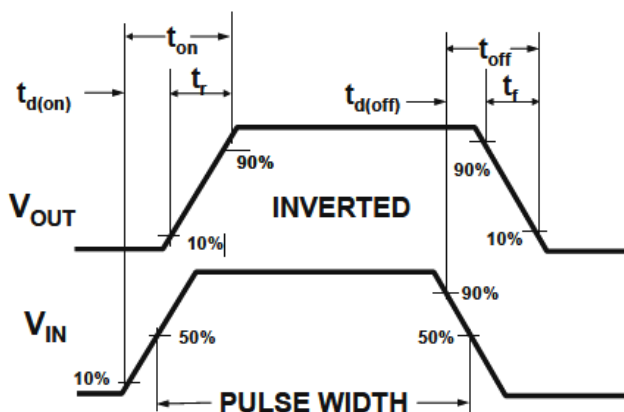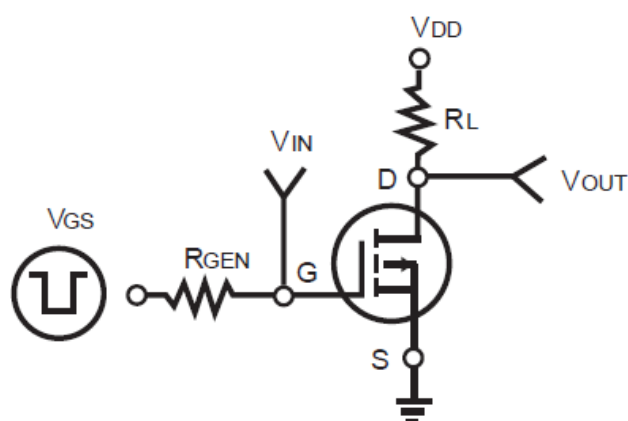

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS (Curves)

Figure1. Power Dissipation

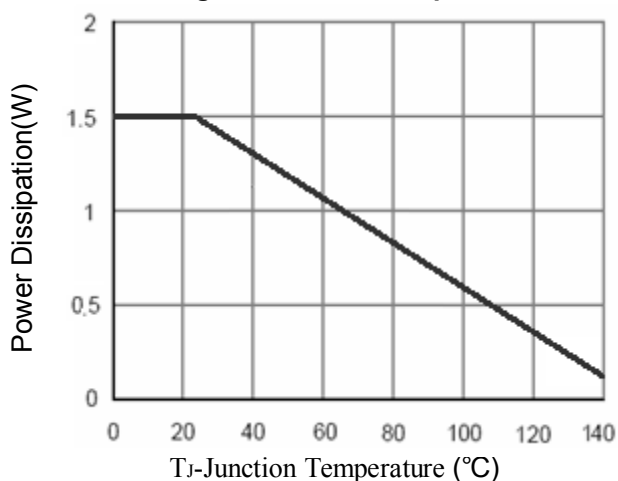


Figure2. Drain Current

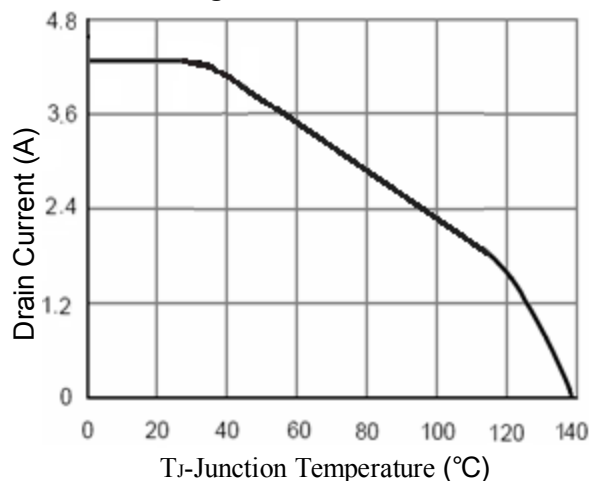


Figure3. Output Characteristics

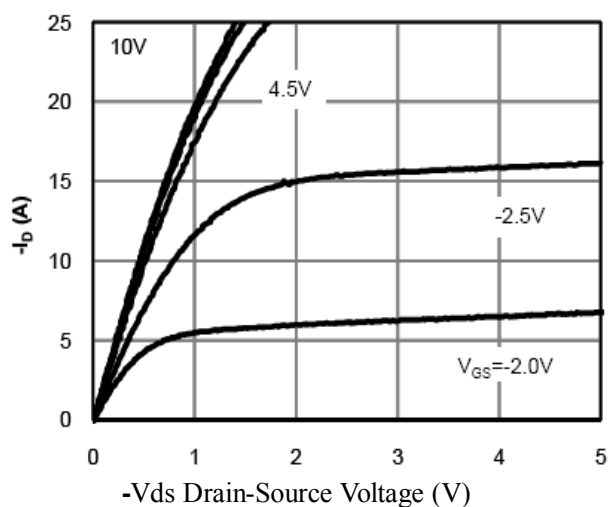


Figure4. Transfer Characteristics

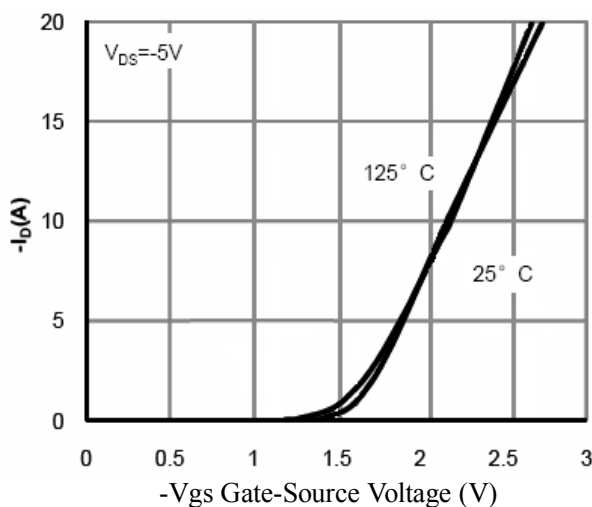




Figure5. Capacitance

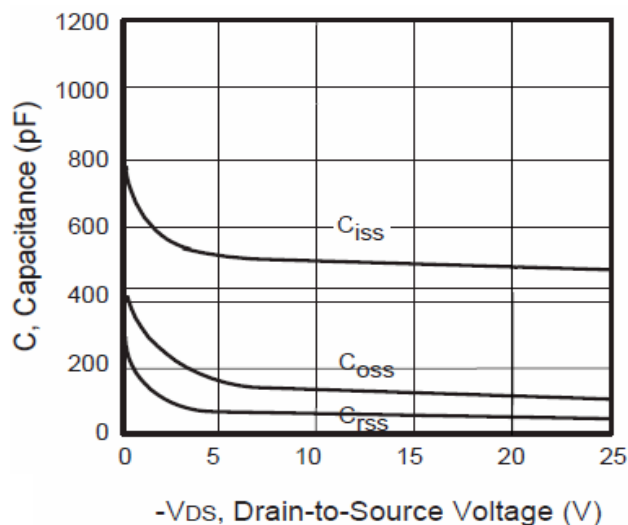


Figure6. $R_{DS(ON)}$ vs Junction Temperature

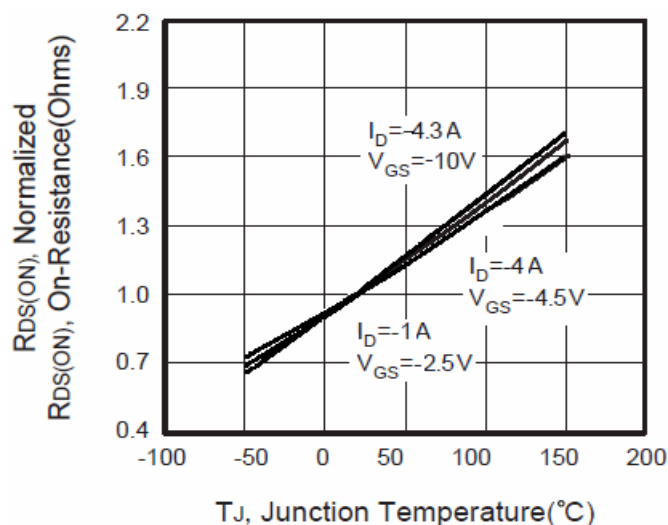


Figure7. Max BV_{DSS} vs Junction Temperature

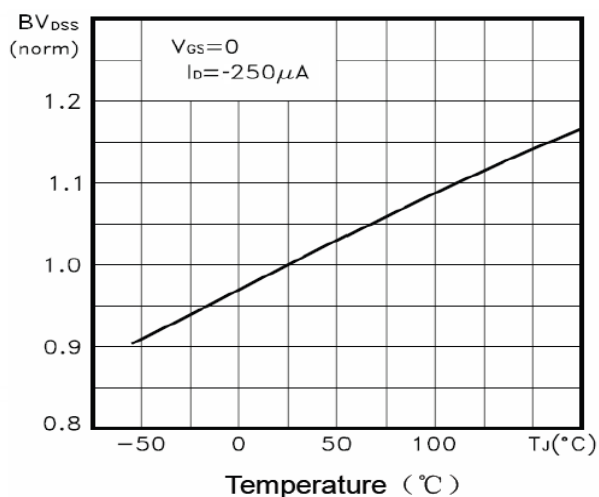


Figure8. $V_{GS(th)}$ vs Junction Temperature

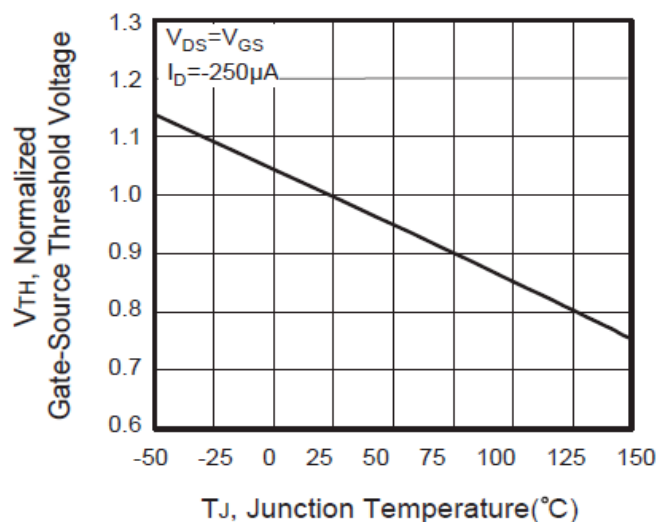


Figure9. Gate Charge Waveforms

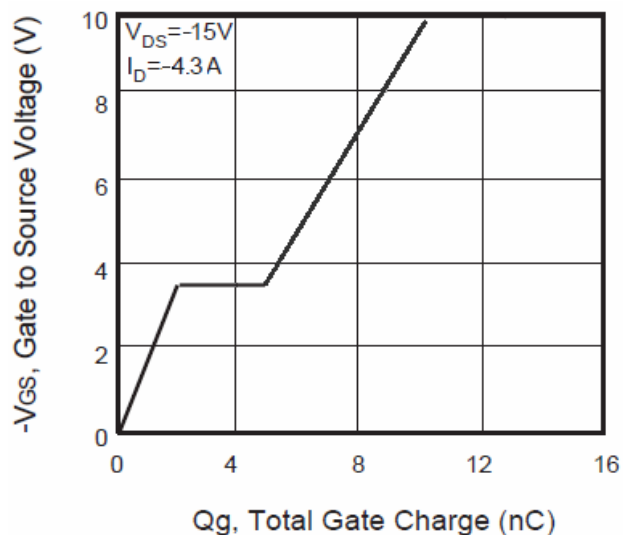


Figure10. Maximum Safe Operating Area



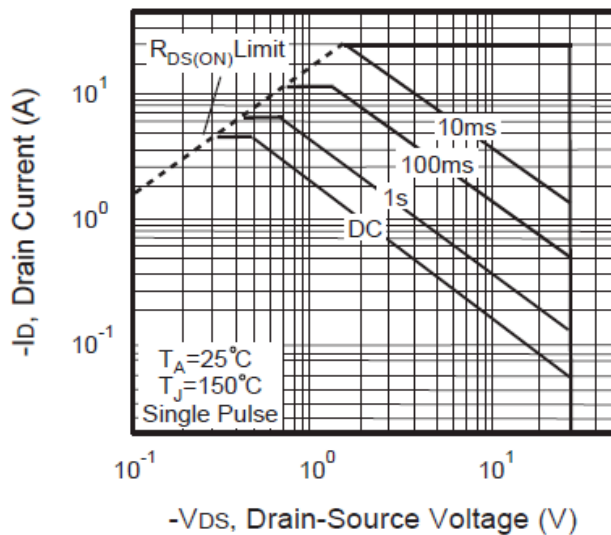




Figure11. Normalized Maximum Transient Thermal Impedance

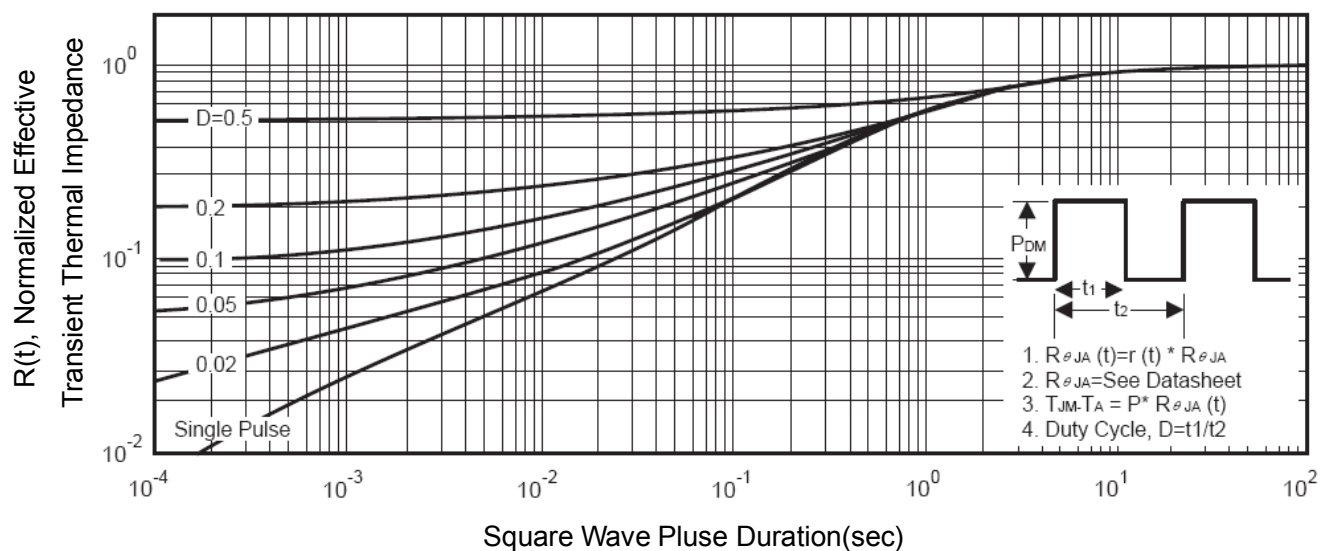

SOT-23-3L Package Information

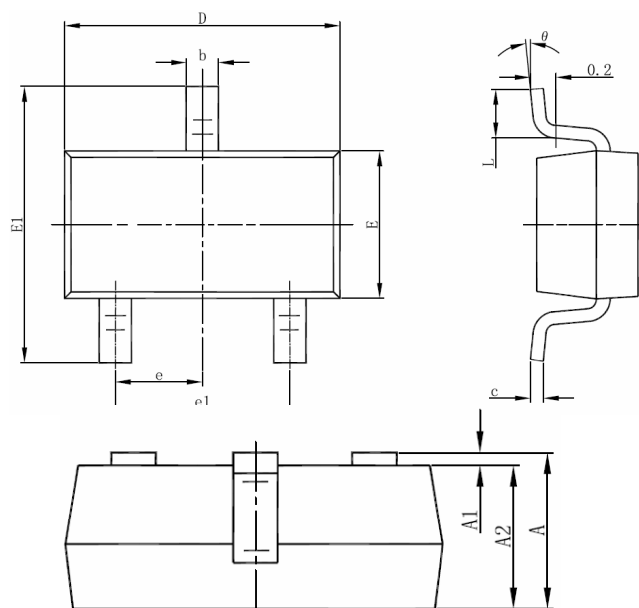

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°



Carrier Dimensions

Symbol	Spec	Symbol	Spec	SOT23-3L
W	8.00 ± 0.10	A₀	3.20 ± 0.10	
E	1.75 ± 0.10	A₁	0.95 ± 0.10	
F	3.50 ± 0.10	B₀	3.25 ± 0.10	
D₀	$1.50 (+0.10, -0)$	B₁	2.40 ± 0.10	
D₁	1.00 ± 0.10	K₀	1.32 ± 0.10	
P₀	4.00 ± 0.10	t₁	0.10	
P₁	4.00 ± 0.10	10*P₀	40.00 ± 0.20	
P₂	2.00 ± 0.05			
t	0.21-0.25			
10*P₀	40.00 ± 0.20			