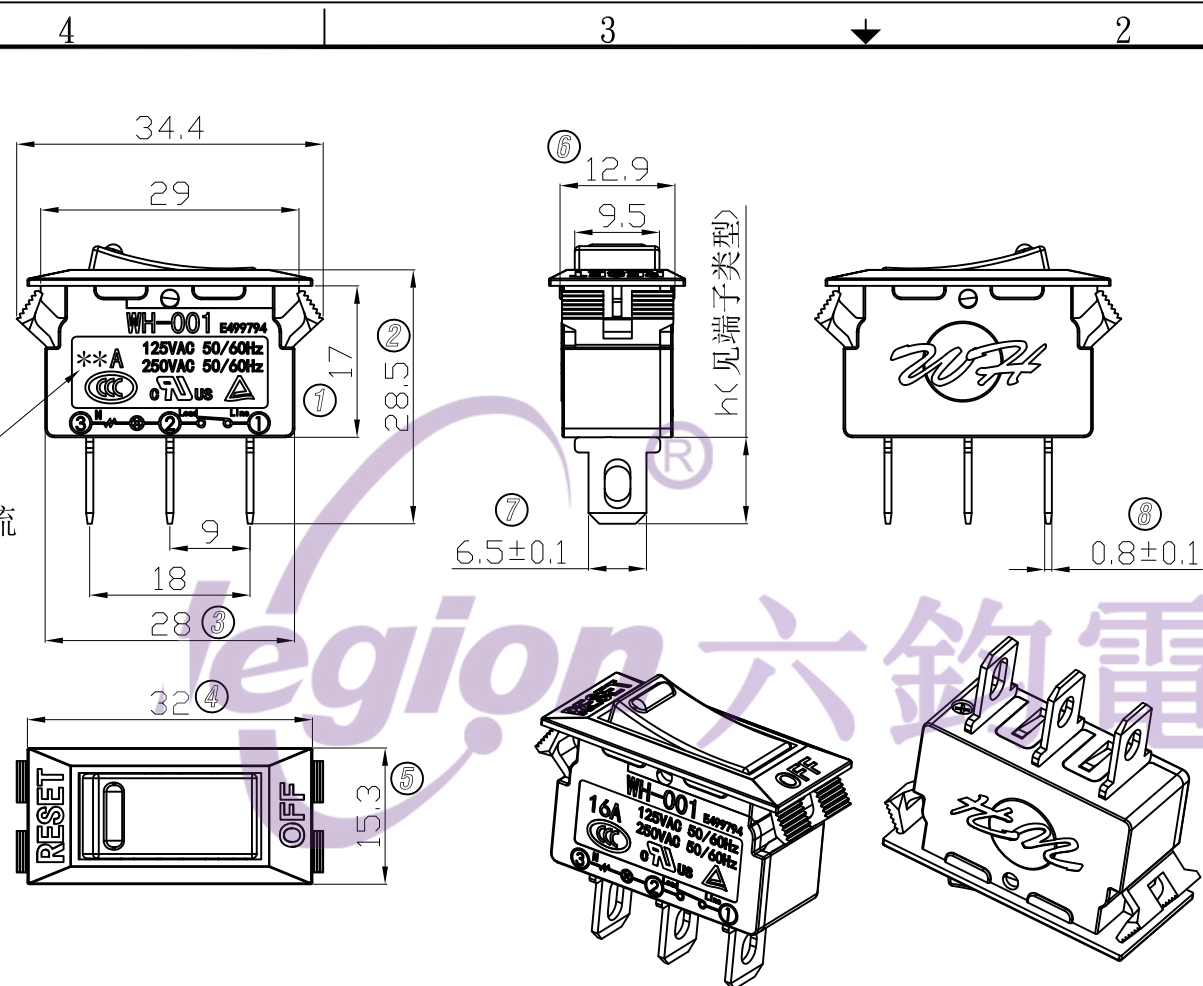




3~16A
额定电流

技术参数:

产品执行标准: ☒ GB17701-2008、☒ IEC60934: 2000、☐ UL1077

- 1、额定电器性能: 3~16A 250VAC;
- 2、动作时间标准: 环境温度25℃ 电流200% (6~32A) 时3到120秒内断开;
- 3、耐压: 2500VAC/0.5mA/1min 无闪络、无击穿;
- 4、机械寿命: ≥10000次;
- 5、耐焊时间: ≤3秒焊接温度350±10℃。

电话: 0769-82310511-867




邮箱: hooya89@hooya.hk

品 名	基座	上盖	端子类型	带灯类型
WH001-**-BR01N3-L22-A	黑色	暗红色	长脚	带红灯


WH001-*****-A

额定电流: 03~16A


端子类型 (参考)

		
短 脚	中长脚	长 脚

开孔尺寸参考



THICKNESS	DIMENSION A
0.8~1.0	29.0 ^{+0.1} ₀
1.1~1.4	29.5 ^{+0.1} ₀
1.5~2.5	30.0 ^{+0.1} ₀

A		→		→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM		
		→		→	RANGE	TOLERANCE				LMC	SCALE	NO		
		→		→	X	±0.30				2019.03.16	MAT'L	***		
		→		→	X.X	±0.20					MATERIAL NO.		DRAWING NO.	REV.
		→		→	X.XX	±0.10					WH001-10BR01N3-L22-A		WIF119005	A
	NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1°	LEGION ELECTRONIC & HARDWARE CO., LTD.							