





RoHS

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

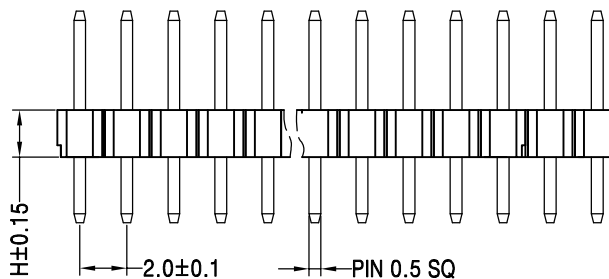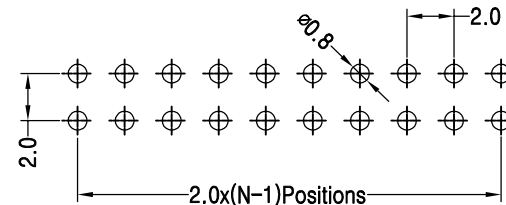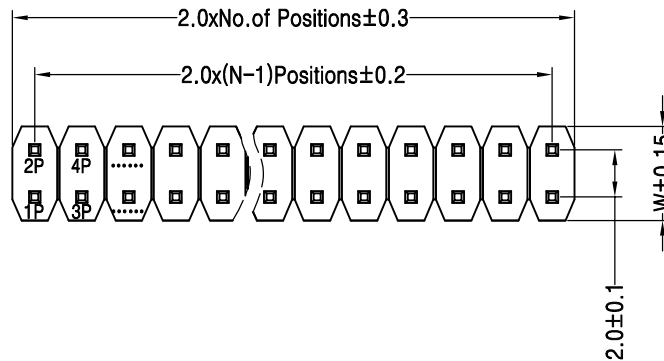

Dimension antitheses list							
ITEM	PA	PB	PW	PC	L	H	W
001	3.9			2.8	8.7	2.0	4.0
Alternate							

				OPERATION		DRAW		SCALE		FIT		深圳市连盛精密连接器有限公司	
				X.X	±0.30			UNIT	mm				
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.		1010200213	
				X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:		2.0PH H=2.0 2x3P DIP PA3.9 PC2.8	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.				L=8.7 AU0.6U PA6T	
A0	2012.04.11	NEW DRAWING											