


1 2 3 4 5 6

A

A

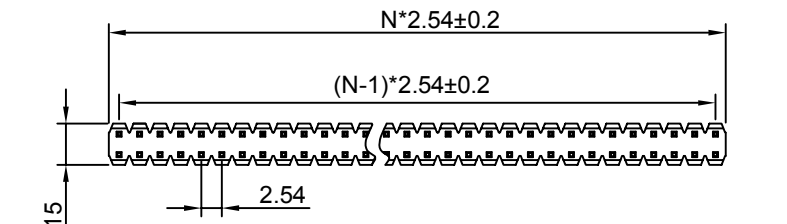



N=PIN数



材料Material
 原料Insulator:PBT/PA9T/6T(UL 94V-0)
 相关材料Related Material: Brass
 表面涂层Surface Coating: Au Over Ni

B

B

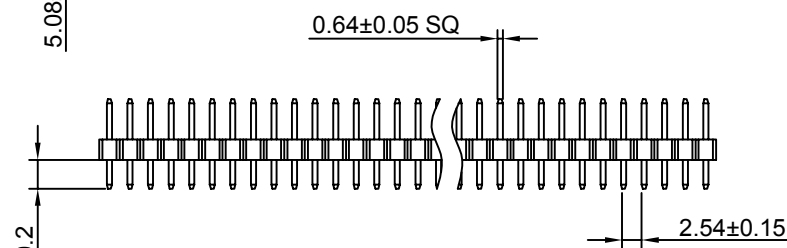


规格Specification
 额定电流Current rating:2.5AMP
 耐压Dielectric Withstanding Voltage:500v Ac Min
 绝缘电阻Insulation Resistance:1000MΩ min
 接触电阻Contact resistance:20MΩ Max
 工作温度Working Temperature:-45℃~+105℃
 Max. Processing Temp瞬时温度:

PBT 240±5 ° 10S
 PA6T/9T 260±5 ° 10S

C

C

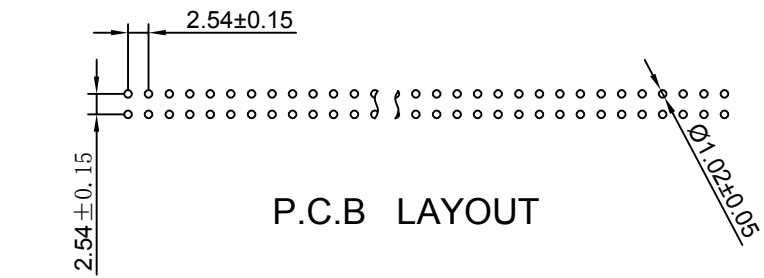

P.C.B LAYOUT

D

D

针长	PC	PA	针长	PC	PA
11.2	3.0	5.7	19.0	3.0	13.5
11.6	3.0	6.1	20.0	3.0	14.5
12.0	3.0	6.5	21.0	3.0	15.5
13.0	3.0	7.5	22.0	3.0	16.5
14.0	3.0	8.5	23.0	3.0	17.5
15.0	3.0	9.5	24.0	3.0	18.5
16.0	3.0	10.5	25.0	3.0	19.5
17.0	3.0	11.5			
18.0	3.0	12.5			

上海洲日电子有限公司 Shanghai Zhouri Electronics CO.,LTD 上海康司玛电子设备进出口有限公司 Shanghai KangSiMa Eletronic Equipment import and export Co.,LTD		tel:021-51571121		http://www.zhouri.net			
		fax:021-51571120		http://www.ksmchina.com			
		绘图: MAXIA		日期:20240224		产品名称: PZ2.54-2xN	
		审核: zhanghai		日期: 20240224			
版本编号: ZRLCGY2024-06-28-CJ/A0		第三视角:		单位: mm			
		比例:		图幅:A4			
				页次 共 01 第 01			

1 2 3 4 5 6