
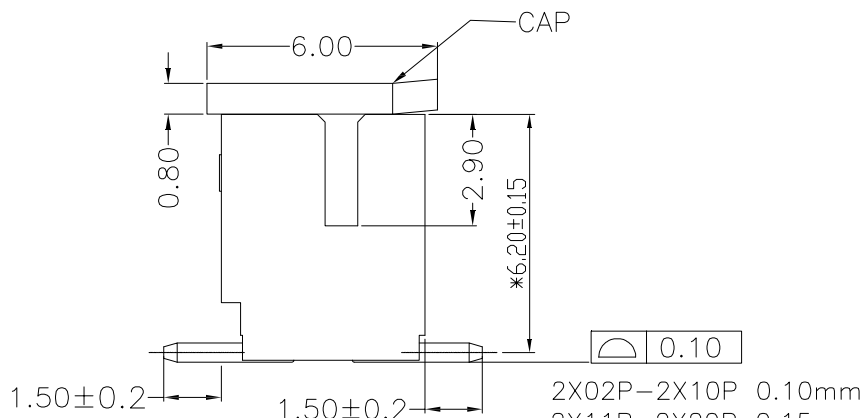


Specifications:
 Current rating:3A AC/DC.
 Voltage rating:250V AC/DC
 Temperature range:-40°C~+105°C.
 Contact resistance:10MΩ Max.
 Insulation resistance:1000MΩ Min.
 Withstanding voltage: 800V AC/minute.
 PIN Material:Brass/Tin over Nickel.
 Material:Pa9t 94v0 (Lvory) .

PART NO.	Dimensions	
	A	B
A2006WV-S-2X02P	6.00	2.00
A2006WV-S-2X03P	8.00	4.00
A2006WV-S-2X04P	10.00	6.00
A2006WV-S-2X05P	12.00	8.00
A2006WV-S-2X06P	14.00	10.00
A2006WV-S-2X07P	16.00	12.00
A2006WV-S-2X08P	18.00	14.00
A2006WV-S-2X09P	20.00	16.00
A2006WV-S-2X10P	22.00	18.00
A2006WV-S-2X11P	24.00	20.00
A2006WV-S-2X12P	26.00	22.00
A2006WV-S-2X13P	28.00	24.00
A2006WV-S-2X14P	30.00	26.00
A2006WV-S-2X15P	32.00	28.00
A2006WV-S-2X16P	34.00	30.00
A2006WV-S-2X17P	36.00	32.00
A2006WV-S-2X18P	38.00	34.00
A2006WV-S-2X19P	40.00	36.00
A2006WV-S-2X20P	42.00	38.00

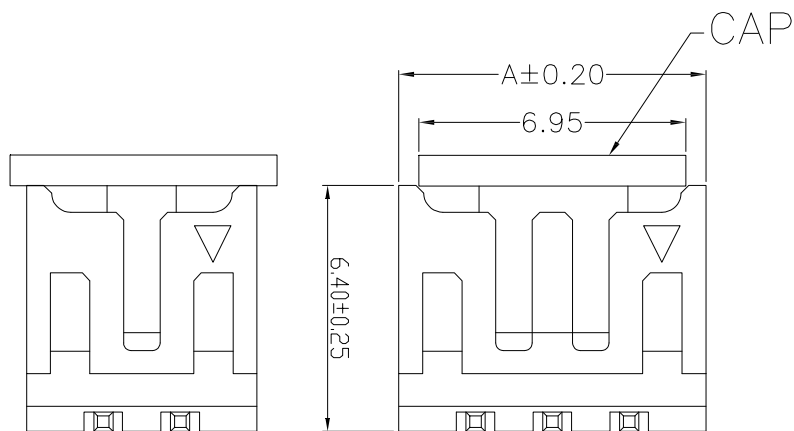

2P 视图

				OPERATION	SCALE	Fit	Yxcon 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.			
				X.X ±0.25	UNIT	MM				
				X.XX ±0.15	SIZE	A4	DESIGN	赵文品2024.10.10	PART NO.	A2006WV-S-2XNP
				X.XXX ±0.10	SHEET	1/1	CHECK		TITLE	
				Angle ±3°	PROJ.	☉	APPROVE		Customer No.	
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL					