

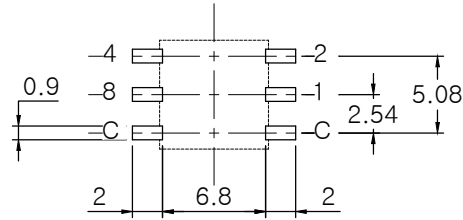


SPECIFICATION


1. Rating : 100mA, DC 5V (Switchin
100mA, DC 50V (None-Switching))
2. Contact Resistance : 100mΩ M
3. Insulation Resistance : 100MΩ M
4. Operating Force : 200gf M
5. Life cycle : 25,000 ste
6. Sealing : IP67 (Dust & Water proo
7. Packing : 70pcs Tube / 800pcs Reel Packi






P.C.B DIMENSION (Top View)



		Real Coded					
		C	1	2	4	8	
10 P o s i t i o n	0	●					0
	1	●	●				1
	2	●		●			2
	3	●	●	●			3
	4	●			●		4
	5	●	●		●		5
	6	●		●	●		6
	7	●	●	●	●		7
	8	●				●	8
	9	●	●			●	9

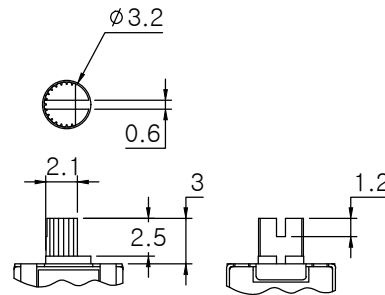

ACTUATOR



△			
△			
△			
△			
△			
SYM	DISCIPTION	DATE	APPROVED



蘇州寰立電子有限公司
HUANLI ELECTRONICS CO., LTD.

TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: ±0.30 ANGULAR: ±3'		SIGNATURES		DATE	TITLE
		DRAWN Alvin		2016.08.18	ROTARY SW
		CHK'D Weiwei		2016.08.18	NO. RS10-MR-10S-H004
		APPV'D Gavin		2016.08.18	
REVISIONS A		SCALE 5/1			