

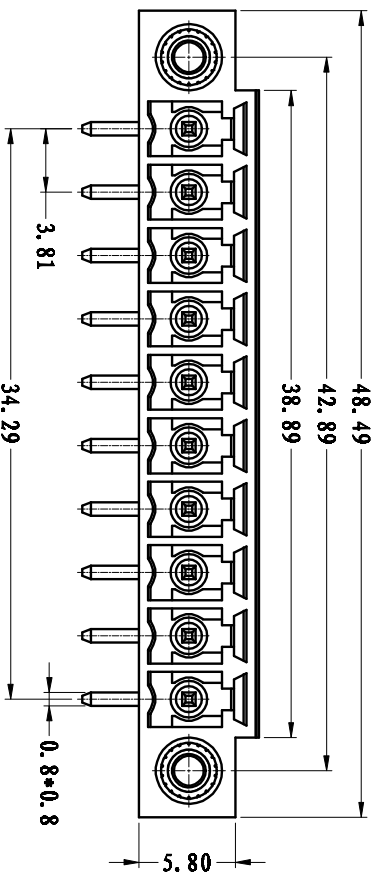
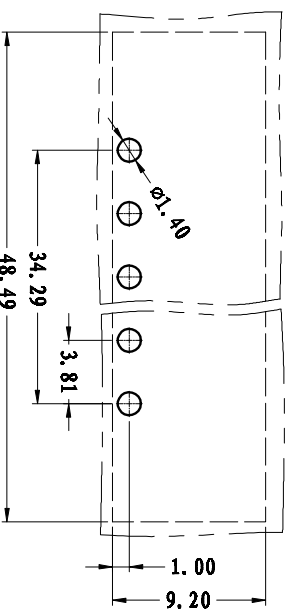


REVISION RECORD		
REV.	CONTENT	MOD.
①	初版发行	



**NOTES:**  
 Pitch: 3.81mm  
 Rated Voltage: 300V  
 Rated Current: 8 A  
 Withstand Voltage: AC2500V for 1 minute  
 Insulation Resistance: 500MΩ / DC500V  
 Using Temperature Range: -40°C ~ +105°C

**技术要求:**  
 间距: 3.81mm  
 额定电压: 300V  
 额定电流: 8A  
 耐电压值: AC2500V/min  
 绝缘阻抗: 500MΩ/DC500V  
 使用条件: -40°C~+105°C

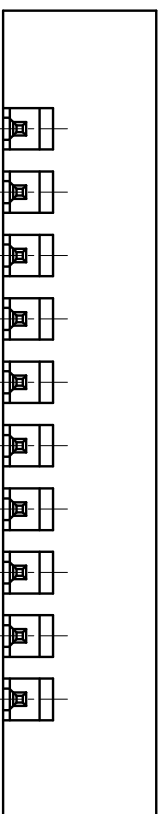

pitch dimension	Nominal dimension					
	over 0 to 6	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150
variable range	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5

3	LZ1-耳架螺母	SMX03251000V	2	黄铜	
2	LZ1-3.81-管料	1003B0002AV	P	黄铜	缺零场
1	LZ1R-3.81-本体	1003M07XAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	DATE	DATE	UNITS	MM	THIRD ANGLE PROJECTION
CHK.	DATE	DATE	SIZE	A4	SHEET
APP.	DATE	DATE	SCALE	1:1	1 of 1
			DWG NO.	SP-2-1003001	REV: V0
<b>上海联捷电气有限公司</b> Shanghai Biliator Electric Co., Ltd			TITLE	LZ1RM-3.81-10P-1Y-00A	
				LZ1RM-3.81-成品	