



■ PRODUCT CHARACTERISTICS



VR(@IC=0.5mA)	150V
VF(Typ@IF=15A)	0.88V
IR(@VR=150V)	50uA
ID	30A

■ MECHANICAL CHARACTERISTICS

- * Case: epoxy,molded
- * Finish:all external surfaces corrosion resistant and terminal
- * Leads are readily solderable
- * Leads temperature for soldering purposes:
260°C Max for 10 seconds

■ FEATURES

- * Guard ring for stress protection
- * Low forward voltage
- * Low power loss/high efficiency
- * High surge capacity
- * Low stored charge majority carrier conduction
- * Pb free package are available



TO-247S

■ ORDER INFORMATION

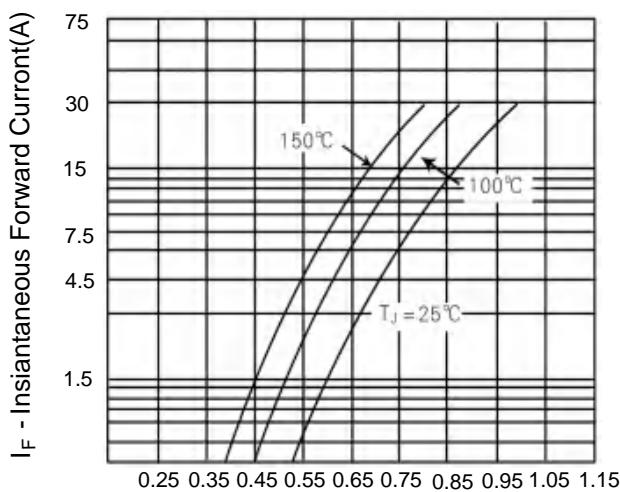
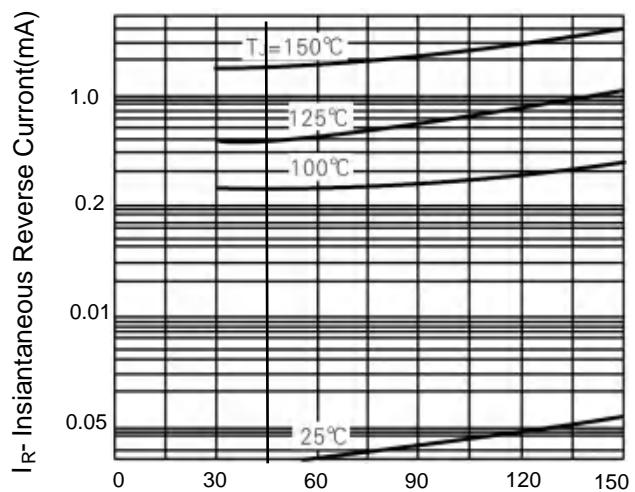
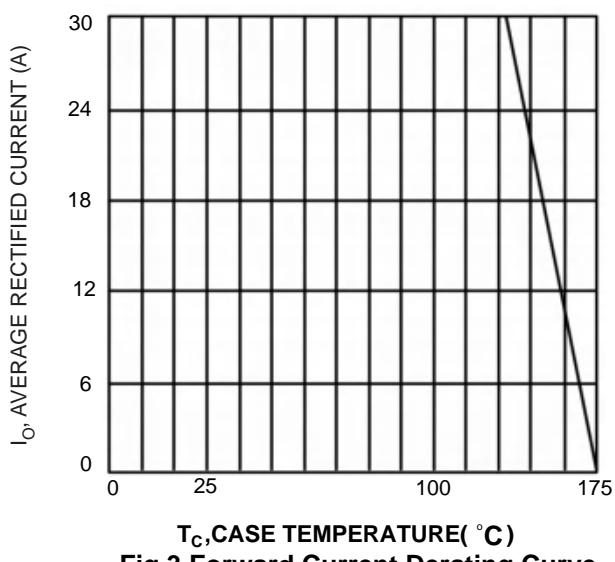
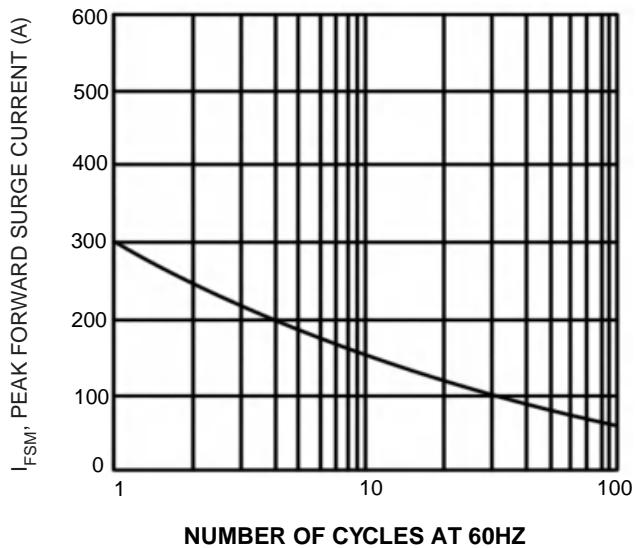
Order codes		Package	Packing
Halogen-free	Halogen		
N/A	MBR30150W	TO-247S	30pieces/Tube

■ MAXIMUM RATINGS (Each diode leg)

Parameter	Symbol	Value	Unit
Peak repetitive reverse voltage	V _{RRM}	150	V
Average rectified output current	Total	30	A
	Per leg	15	A
Non-repetitive peak forward surge current 8.3ms single half sine-wave superimposed on reate load	I _{FSM}	300	A
Operating and storage temperature range	T _J ,T _{STG}	-55 to + 175	°C

■ ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Peak repetitive reverse voltage	B _V	I _C =0.5mA,T _J =25°C	150	-	-	V
Forward voltage drop	V _F	I _F =15A,T _J =25°C	-	0.88	0.93	V
Leakage current	I _R	V _R =150V, T _J =25°C	-	-	0.05	mA
		V _R =150V,T _J =125°C	-	-	6	

■ TYPICAL CHARACTERISTICS

Figure 1. Typical Forward Voltage Per Diode

Figure 2. Typical Reverse Current Per Diode

Fig.3 Forward Current Derating Curve

Fig.4 Max Non-Repetitive Surge Current



■ TO-247S PACKAGE OUTLINE DIMENSIONS

