



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
05	△△	Change the housing Material	2008.10.13	許承佑
06	△△	變更料號	2008.09.27	彭思城
07	△△	變更圖號並修改注解與可做PIN	2011.04.26	左國強
08	△△	數 依實際要求, 設變產品配	2011.09.15	左國強

Recommended P.C.Board Layout
(Tolerance:±0.05)

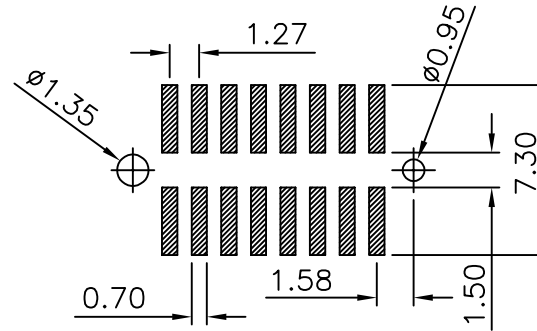



Specifications

Current Rating:1Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding: 300VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

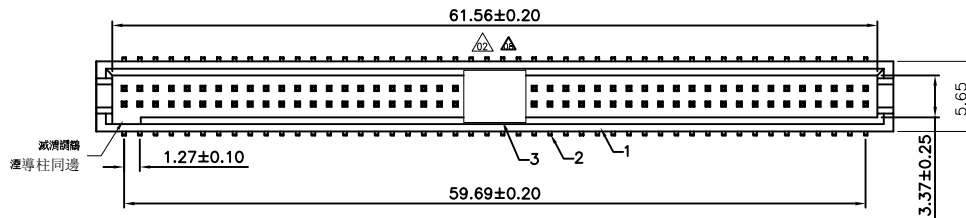

Ordering Information △

G PEC241-48 XX B001 C 1 A X

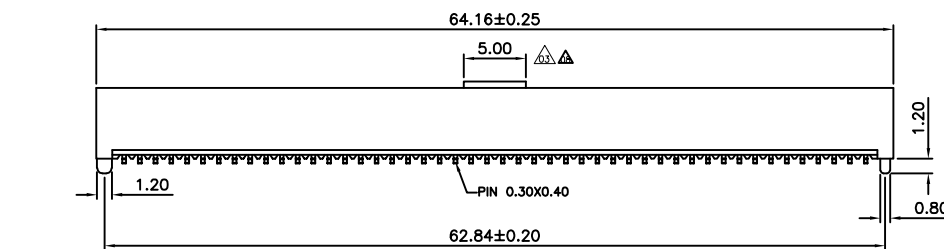

No. of Pins per Row Standard Plating Standard Packing
 △ 05~50 02=Gold Flash C=Tube
 Selective Plating Selective Packing
 01=Tin D=Tape Reel
 05=Gold Flash/Tin F=Cap+Tape&Reel

深圳市威尔杰电子有限公司

GENERAL TOLERANCE	
X.*±5.0*	X.±0.30
.X*±3.0*	.X±0.25
.XX*±2.0*	.XX±0.15
.XXX*±1.0*	.XXX±0.10

DESIGN: 左國強	DATE: 2011.09.15
CHECKED: 李新華	DATE: 2011.09.15
AUDITED: LINK	DATE: 2011.09.15

DWG. NO. △△	GPEC241-CB1CA
PART NO. △	GPEC241-48XXB001C1AX

TITLE.	1.27 BOX HEADER DUAL ROWS SMT TYPE W/POST
--------	---

REV. 08	UNIT. mm	SCALE. 1:1	PAGE. 1/1
---------	----------	------------	-----------