





SPECIFICATIONS

Current Rating: 1.5 Amps
 Insulation Resistance: 1000M Ω , Min
 Contact Resistance: 20m Ω , Max
 Withstanding Voltage: AC 500V
 Operation Temperature: -40° to +105°
 Contact Material: Brass
 Standard: PA6T
 Insulator Material: Polyester (UL 94V-0)
 Contact Plating: Gold Flash
 Max. Processing Temp: 240° C for 30-60 seconds
 (260° C for 5 seconds)

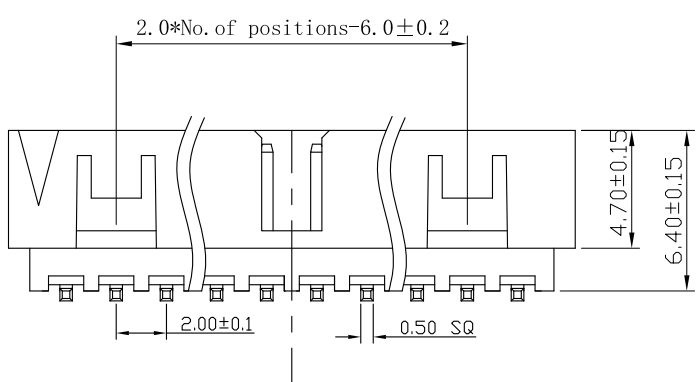

RECOMMEND P. C. B LAYOUT
 PCB TOLERANCE: ±0.05 (TOP VIEW)

| io. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B | No. of | DIM. A | DIM. B |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 6 | 4.00 | 8.60 | 24 | 22.00 | 26.60 | 42 | 40.00 | 44.60 | 60 | 58.00 | 62.60 |
| 8 | 6.00 | 10.60 | 26 | 24.00 | 28.60 | 44 | 42.00 | 46.60 | 62 | 60.00 | 64.60 |
| 10 | 8.00 | 12.60 | 28 | 26.00 | 30.60 | 46 | 44.00 | 48.60 | 64 | 62.00 | 66.60 |
| 12 | 10.00 | 14.60 | 30 | 28.00 | 32.60 | 48 | 46.00 | 50.60 | 66 | 64.00 | 68.60 |
| 14 | 12.00 | 16.60 | 32 | 30.00 | 34.60 | 50 | 48.00 | 52.60 | 68 | 66.00 | 70.6 |
| 16 | 14.00 | 18.60 | 34 | 32.00 | 36.60 | 52 | 50.00 | 54.60 | 70 | 68.00 | 72.60 |
| 18 | 16.00 | 20.60 | 36 | 34.00 | 38.60 | 54 | 52.00 | 56.60 | | | |
| 20 | 18.00 | 22.60 | 38 | 36.00 | 40.60 | 56 | 54.00 | 58.60 | | | |
| 22 | 20.00 | 24.60 | 40 | 38.00 | 42.60 | 58 | 56.00 | 60.60 | | | |



深圳市韩下电子有限公司

| | | | | | | | | | |
|--------------------------------------|--------|------------------------|---------|----------------------------------|----|-------|-----|------------|--|
| UNLESS OTHERWISE SPECIFIED TOLERANCE | | | | DRAW NAME: HX JN2.0-2x7P TP H6.4 | | | | | |
| X | : ±0.3 | X° | : ±5° | SIZE | A4 | SCALE | N:1 | PROUCT NO. | |
| X.X | : ±0.2 | X.X° | : ±1° | REV | A | UNIT | mm | PROJECT | |
| X.XX | : ±0.1 | X.XX° | : ±0.5° | | | | | | |
| DRAW: 黄彬 2022/04/21 | | CHECKED: 张伟 2022/04/21 | | APPROVED: 罗小春 2022/04/21 | | PAGE | | 1/1 | |