

LCD&LCM
SPECIFICATION
液晶显示屏产品使用说明书

MODULE NO.

T12864C033A

128x64 图形点阵
1.4" 单色 , COG 工艺
SPI 串口通讯 , FPC 插接

Designed	Checked	Approved

若因贵公司使用我公司的文件或产品，而涉及到第三方之专利或版权等相关产权的应用时，则由贵公司负责取得相关授权，我公司不承担由此引起的相关责任。

Revision history 修改记录

revision	date	description	remark
A00	2013-11-25	First release	
A01	2015-08-12		

Content/目录

1. **Feature/显示特性**
2. **Mechanical specifications/外形尺寸说明**
3. **Block diagram & power supply/电路原理图**
4. **Pin description/PIN 脚描述**
5. **Absolute maximum rating/限定参数**
6. **Electrical characteristics/电气特性**
7. **Backlight characteristics/背光特性**
8. **Electrical-optical characteristics/光学特性**
9. **Control and display commands/指令描述**
10. **DDRAM 映射表**
11. **Inspection standards/检验标准**
12. **Handling precautions/注意事项**

1. Feature/显示特性


Display resolution/点阵数	: 128(w)*64(h)
Display mode/显示模式	: FSTN ,Positive(or Black-Negative), Transmissive
Driving method/驱动方式	: 1/64 Duty , 1/9 Bias
Viewing direction/视角	: 12:00 o'clock
Backlight/背光	: LED , White(or Blue,Other)
Built-in controller/控制器	: UC1701
Operation temp/工作温度	: -10℃~60℃
Storage temp/储存温度	: -20℃~70℃

2. Mechanical Specifications/外形尺寸说明


2.1 尺寸描述

Dimensional outline (W*H*T)/外形尺寸	: 33.7mm*30.5mm*1.8mm
Viewing area (W*H)/视域尺寸	: 30.7mm*23.0mm
Dot pitch (W*H)/点距	: 0.225mm*0.328mm
Dot size (W*H)/点大小	: 0.205mm*0.308mm
Weigh/重量 t	: Approx

2.2 Outline Dimension 外形尺寸图

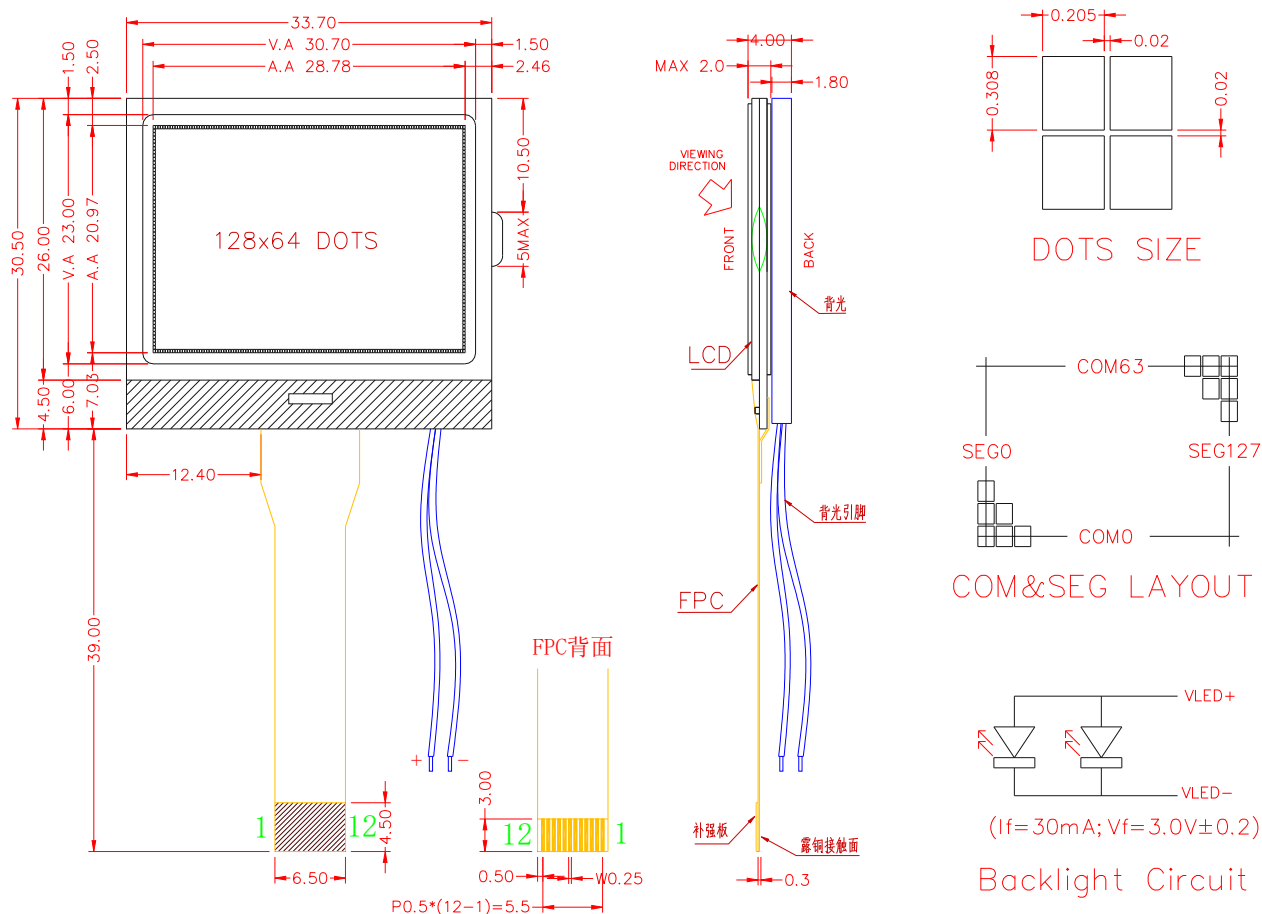

2. Block Diagram & Power supply/电路原理图

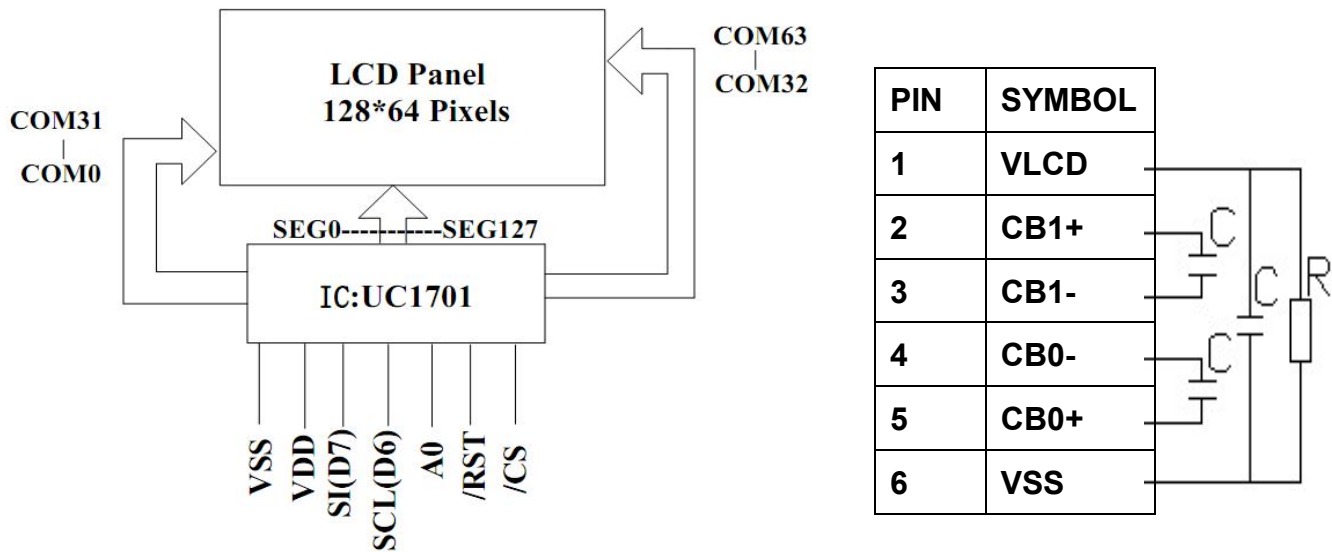

$C=1.0\mu F/25V$

$R=NC$ (保留电阻位以便调节)

4. Pin description/PIN 脚描述

Pin No.	Pin Name	Function
1	VLCD	Connect capacitors Ground 倍压输出（接电容即可）
2	CB1+	Conntet capacitors between VB1+ and VB1- 接电容
3	CB1-	
4	CB0-	Conntet capacitors between VB0+ and VB0- 接电容
5	CB0+	
6	VSS	GND 0V 地
7	VDD	Power Supply. 3.3V 电源
8	SI (D7)	Serial data write and read input/output pin. 数据
9	SCL (D6)	Serial pixel clock signal input pin. 时钟
10	A0	Register select input, H: data; L: command 选择指令或数据
11	/RST	Reset signal (Low effective) 复位
12	/CS	Chip select input pin. 片选
背光	BLA(+)	LED正极，工作电压3.0V，工作电流20mA~25mA
	BLK(-)	LED负极，0V ，也可直接也VSS边接

5. Absolute Maximum Ratings/限定参数

Items	Symbol	MIN.	MAX.	Unit	Condition
Supply Voltage/供电电压	V _{DD}	-0.3	+3.3	V	V _{SS} = 0V
	V _{lcd}	-0.3	+8.7	V	V _{SS} = 0V
Input Voltage/输入电压	V _{IN}	-0.3	V _{DD} +0.3	V	V _{SS} = 0V
LED forward current/背光电流	I _f	0	20	mA	---
Operating Temp./工作温度	T _{OP}	-10	+60	°C	---
Storage Temp./储存温度	T _{st}	-20	+70	°C	---

6. Electrical Characteristics/电气特性

6.1 Typical Electrical Characteristics


(V_{SS} = 0V, V_{DD} = 3.3V ± 10%, T_{OP} = 25°C)

Items	Symbol	MIN.	TYP.	MAX.	Unit	Condition Pin
Operating Voltage/工作电压	V _{DD}	2.7	3.0	3.3	V	V _{DD}
LCD Operating Voltage	V _{op}	-	6.5	-	V	V ₀
Input High Voltage/输入高电压	V _{IH}	0.8 V _{DD}	-	V _{DD}	V	AO, W/R, RD, D0~D7
Input Low Voltage 输入低电压	V _{IL}	0	-	0.4 V _{DD}	V	
Output High Voltage 输出高电压	V _{OH}	0.7	-	V _{DD}	V	D0~D7
Output Low Voltage 输出低电压	V _{OL}	0	-	0.2	V	D0~D7
Supply Current/供电电流	I _{DD}	---	0.6	8	mA	V _{DD} , V _{SS}

Note 1: There is tolerance in optimum LCD driving voltage during production and it will be within the specified range.

6.2 Timing Specifications

The 4-line SPI Interface

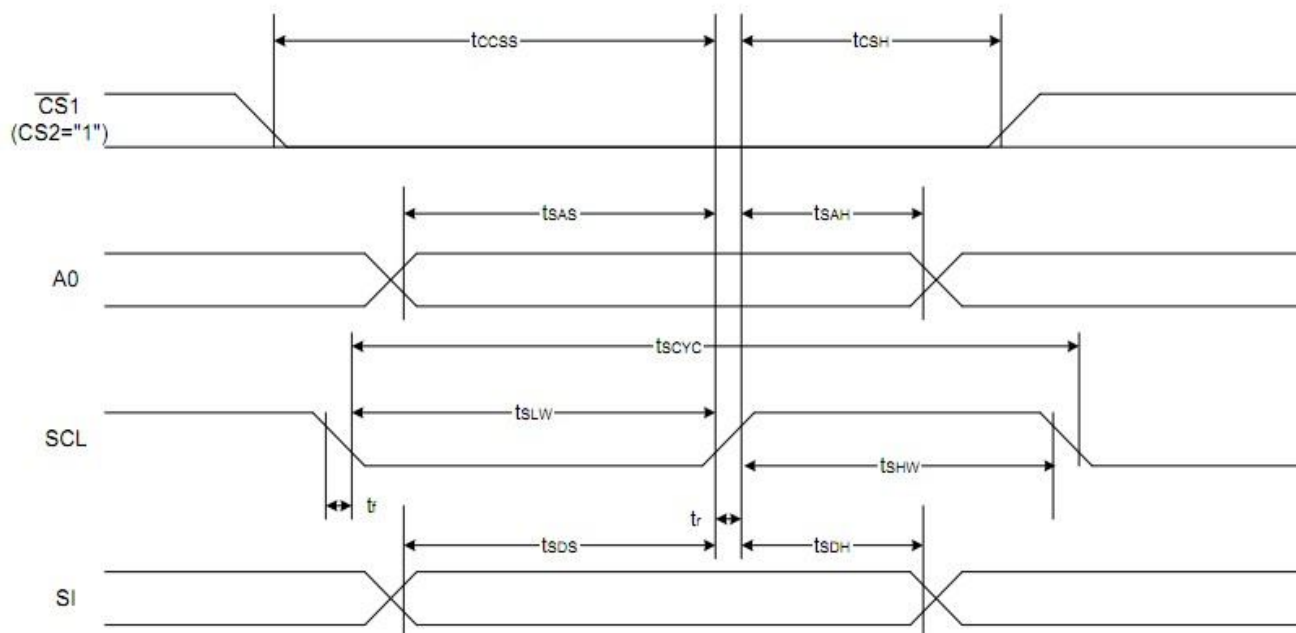

Item	Signal	Symbol	Condition	Rating		Units
				Min.	Max.	
4-line SPI Clock Period	SCL	T_{scyc}		100	—	ns
SCL "H" pulse width		T_{SHW}		50	—	
SCL "L" pulse width		T_{SLW}		50	—	
Address setup time	A0	T_{SAS}		30	—	
Address hold time		T_{SAH}		20	—	
Data setup time	SI	T_{SDS}		30	—	
Data hold time		T_{SDH}		20	—	
CS-SCL time	CS	T_{CSS}		30	—	
CS-SCL time		T_{CSH}		60	—	

Reset timing

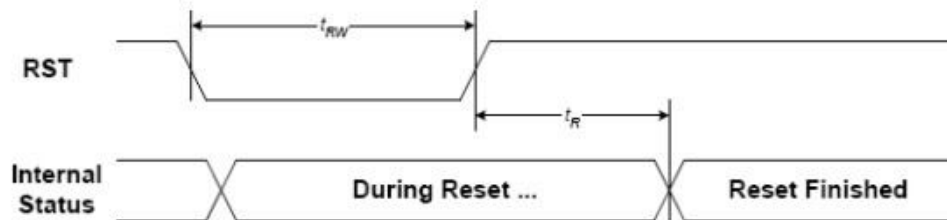


FIGURE 15: Reset Characteristics

($1.65V \leq V_{DD} < 3.3V$, $T_a = -30$ to $+85^{\circ}C$)

Symbol	Signal	Description	Condition	Min.	Max.	Units
t_{RW}	RST	Reset low pulse width		3	—	μS
t_R	RST,, Internal Status	Reset to Internal Status pulse delay		6	—	mS


7. Backlight Characteristics/背光特性

Items	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Forward Voltage/电压	V_f	2.8	3.0	3.1	V	$I_f=10mA$
Reverse current/电流	I_r	---	20	25	mA	$V_r=3V$
Peak wave length/波长	λ	---	---	---	nM	$I_f=20mA$
Luminance/亮度	L_v	---	---	---	Cd/m^2	$I_f=20mA$
Color /颜色	White (白色, 或者其他色)					


8. Electrical-Optical Characteristics/光学特性

Items	Symbol	Condition	MIN.	TYP.	MAX.	Unit	NOTE
Response time/反应时间	Tr	Ta= 25℃	---	185	---	ms	2
	Tf		---	200	---		
Contrast ratio/对比度	Cr	Ta= 25℃	---	--	---		3
Viewing angle range/视角范围	θ	Cr $\geq$ 2	-40	---	40	degree	


Note 1. Definition of response time

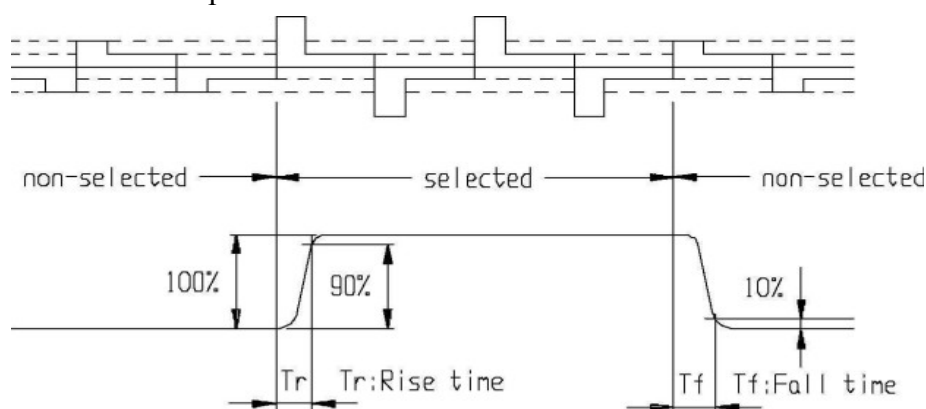

Note2 . Definition of Contrast Ratio 'Cr'

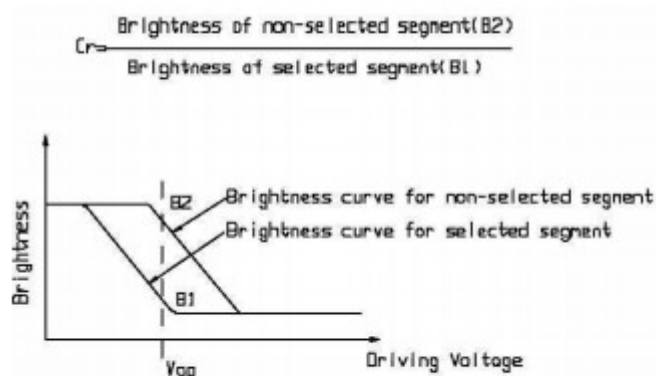

Note 3. Definition of Viewing Angle Range ' θ '

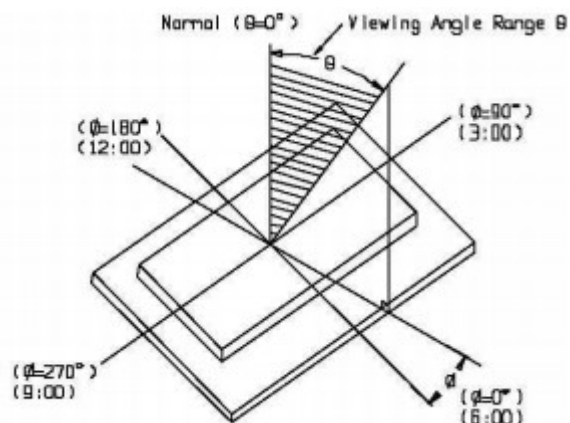

9. Control and display commands/指令描述

COMMAND TABLE

The following is a list of host commands supported by UC1701x

C/D: 0: Control, 1: Data
W/R: 0: Write Cycle, 1: Read Cycle
Useful Data bits – Don't Care

	Command	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0	Action	Default
1.	Write Data Byte	1	0	#	#	#	#	#	#	#	#	Write 1 byte	N/A
2.	Read Data Byte	1	1	#	#	#	#	#	#	#	#	Read 1 byte	N/A
3.	Get Status	0	1	BZ	MX	DE	RST	0	0	0	0	Get Status	--
4.	Set Column Address LSB	0	0	0	0	0	0	#	#	#	#	Set CA [3:0]	0
	Set Column Address MSB			0	0	0	1	#	#	#	#	Set CA [7:4]	0
5.	Set Power Control	0	0	0	0	1	0	1	#	#	#	Set PC[2:0]	000b
6.	Set Scroll Line	0	0	0	1	#	#	#	#	#	#	Set SL[5:0]	0
7.	Set Page Address	0	0	1	0	1	1	#	#	#	#	Set PA[3:0]	0
8.	Set V _{LCD} Resistor Ratio	0	0	0	0	1	0	0	#	#	#	Set PC[5:3]	100b
9.	Set Electronic Volume (double-byte command)	0	0	1	0	0	0	0	0	0	1	Set PM[5:0]	20H
				0	0	#	#	#	#	#	#		
10.	Set All-Pixel-ON	0	0	1	0	1	0	0	1	0	#	Set DC[1]	0b
11.	Set Inverse Display	0	0	1	0	1	0	0	1	1	#	Set DC[0]	0b
12.	Set Display Enable	0	0	1	0	1	0	1	1	1	#	Set DC[2]	0b
13.	Set SEG Direction	0	0	1	0	1	0	0	0	0	#	Set LC[0]	0b
14.	Set COM Direction	0	0	1	1	0	0	#	-	-	-	Set LC[1]	0b
15.	System Reset	0	0	1	1	1	0	0	0	1	0	System Reset	N/A
16.	NOP	0	0	1	1	1	0	0	0	1	1	No operation	N/A
17.	Set LCD Bias Ratio	0	0	1	0	1	0	0	0	1	#	Set BR	0b
18.	Set Cursor Update Mode	0	0	1	1	1	0	0	0	0	0	AC3=1, CR=CA	N/A
19.	Reset Cursor Update Mode	0	0	1	1	1	0	1	1	1	0	AC3=0, CA=CR.	N/A
20.	Set Static Indicator OFF	0	0	1	0	1	0	1	1	0	0	NOP	N/A
21.	Set Static Indicator ON	0	0	1	0	1	0	1	1	0	1	NOP	N/A
	Set Static Indicator			-	-	-	-	-	-	-	-		
22.	Set Booster Ratio (double-byte command)	0	0	1	1	1	1	1	0	0	0	NOP	00b
				0	0	0	0	0	0	#	#		
23.	Set Power Save (compound command)	0	0	#	#	#	#	#	#	#	#	Display OFF & All Pixel ON	N/A
24.	Set Test Control (double-byte command)	0	0	1	1	1	1	1	1	TT		For UCI only Do NOT use	N/A
				-	#	#	#	#	#	#	#		
25.	Set Adv. Program Control 0 (double-byte command)	0	0	1	1	1	1	1	0	1	0	Set TC, WA[1:0]	90H
				#	0	0	1	0	0	#	#		
26.	Set Adv. Program Control 1 (double-byte command)	0	0	1	1	1	1	1	0	1	1	For UCI only Set APC1	N/A
				#	#	#	#	#	#	#	#		

* Other than commands listed above, all other bit patterns result in NOP (No Operation).

10. DDRAM 映射表

PA[3:0]	0	Line AddrCsa																	Panel Location	MY=0		MY=1					
			SL=0	SL=16	SL=0	SL=0	SL=25	SL=25																			
0000	D0	00H	0	1					Page 0											COM1	C1	C49	C64	C48	C25	C9	
	D1	01H	0	1																	COM2	C2	C50	C63	C47	C24	C8
	D2	02H	0	0																	COM3	C3	C51	C62	C46	C23	C7
	D3	03H	0	0																	COM4	C4	C52	C61	C45	C22	C6
	D4	04H	0	1																	COM5	C5	C53	C60	C44	C21	C5
	D5	05H	1	1																	COM6	C6	C54	C59	C43	C20	C4
	D6	06H	1	0																	COM7	C7	C55	C58	C42	C19	C3
	D7	07H	1	0																	COM8	C8	C56	C57	C41	C18	C2
0001	D0	08H							Page 1											COM9	C9	C57	C56	C40	C17	C1	
	D1	09H																			COM10	C10	C58	C55	C39	C16	--
	D2	0AH																			COM11	C11	C59	C54	C38	C15	--
	D3	0BH																			COM12	C12	C60	C53	C37	C14	--
	D4	0CH																			COM13	C13	C61	C52	C36	C13	--
	D5	0DH																			COM14	C14	C62	C51	C35	C12	--
	D6	0EH																			COM15	C15	C63	C50	C34	C11	--
	D7	0FH																			COM16	C16	C64	C49	C33	C10	--
0010	D0	10H							Page 2											COM17	C17	C1	C48	C32	C9	--	
	D1	11H																			COM18	C18	C2	C47	C31	C8	--
	D2	12H																			COM19	C19	C3	C46	C30	C7	--
	D3	13H																			COM20	C20	C4	C45	C29	C6	--
	D4	14H																			COM21	C21	C5	C44	C28	C5	--
	D5	15H																			COM22	C22	C6	C43	C27	C4	--
	D6	16H																			COM23	C23	C7	C42	C26	C3	--
	D7	17H																			COM24	C24	C8	C41	C25	C2	--
0011	D0	18H							Page 3											COM25	C25	C9	C40	C24	C1	--	
	D1	19H																			COM26	C26	C10	C39	C23	C64	C48*
	D2	1AH																			COM27	C27	C11	C38	C22	C63	C47
	D3	1BH																			COM28	C28	C12	C37	C21	C62	C46
	D4	1CH																			COM29	C29	C13	C36	C20	C61	C45
	D5	1DH																			COM30	C30	C14	C35	C19	C60	C44
	D6	1EH																			COM31	C31	C15	C34	C18	C59	C43
	D7	1FH																			COM32	C32	C16	C33	C17	C58	C42
0100	D0	20H							Page 4											COM33	C33	C17	C32	C16	C57	C41	
	D1	21H																			COM34	C34	C18	C31	C15	C56	C40
	D2	22H																			COM35	C35	C19	C30	C14	C55	C39
	D3	23H																			COM36	C36	C20	C29	C13	C54	C38
	D4	24H																			COM37	C37	C21	C28	C12	C53	C37
	D5	25H																			COM38	C38	C22	C27	C11	C52	C36
	D6	26H																			COM39	C39	C23	C26	C10	C51	C35
	D7	27H																			COM40	C40	C24	C25	C9	C50	C34
0101	D0	28H							Page 5											COM41	C41	C25	C24	C8	C49	C33	
	D1	29H																			COM42	C42	C26	C23	C7	C48	C32
	D2	2AH																			COM43	C43	C27	C22	C6	C47	C31
	D3	2BH																			COM44	C44	C28	C21	C5	C46	C30
	D4	2CH																			COM45	C45	C29	C20	C4	C45	C29
	D5	2DH																			COM46	C46	C30	C19	C3	C44	C28
	D6	2EH																			COM47	C47	C31	C18	C2	C43	C27
	D7	2FH																			COM48	C48	C32	C17	C1	C42	C26
0110	D0	30H							Page 6											COM49	C49	C33	C16	--	C41	C25	
	D1	31H																			COM50	C50	C34	C15	--	C40	C24
	D2	32H																			COM51	C51	C35	C14	--	C39	C23
	D3	33H																			COM52	C52	C36	C13	--	C38	C22
	D4	34H																			COM53	C53	C37	C12	--	C37	C21
	D5	35H																			COM54	C54	C38	C11	--	C36	C20
	D6	36H																			COM55	C55	C39	C10	--	C35	C19
	D7	37H																			COM56	C56	C40	C9	--	C34	C18
0111	D0	38H							Page 7											COM57	C57	C41	C8	--	C33	C17	
	D1	39H																			COM58	C58	C42	C7	--	C32	C16
	D2	3AH																			COM59	C59	C43	C6	--	C31	C15
	D3	3BH																			COM60	C60	C44	C5	--	C30	C14
	D4	3CH																			COM61	C61	C45	C4	--	C29	C13
	D5	3DH																			COM62	C62	C46	C3	--	C28	C12
	D6	3EH																			COM63	C63	C47	C2	--	C27	C11
	D7	3FH																			COM64	C64	C48	C1	--	C26	C10
1000	D0	40H							Page 8											CIC	CIC	CIC	CIC	CIC	CIC	CIC	

MX=0

SEG1

SEG2

SEG3

SEG4

SEG5

SEG6

SEG7

SEG8

MX=1

SEG132

SEG131

SEG130

SEG129

SEG128

SEG127

SEG126

SEG125

SEG128

SEG129

SEG130

SEG131

SEG132

65


49

65

49

MUX

12. Inspection Standards/检验标准

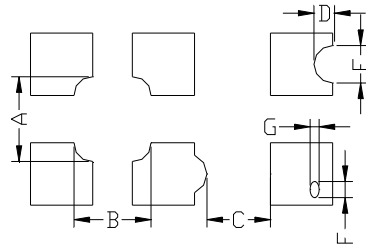Item	Criterion for defects	Defect type
1) Display on inspection/显示效果	(1) Non display (2) Vertical line is deficient (3) Horizontal line is deficient (4) Cross line is deficient	Major
2) Black / White spot/黑点或白点	Size Φ (mm) Acceptable number $\Phi \leq 0.3$ Ignore (note) $0.3 < \Phi \leq 0.45$ 3 $0.45 < \Phi \leq 0.6$ 1 $0.6 < \Phi$ 0	Minor
3) Black / White line/黑线或白线	Length (mm) Width (mm) Acceptable number $L \leq 10$ $W \leq 0.03$ Ignore $5.0 \leq L \leq 10$ $0.03 < W \leq 0.04$ 3 $5.0 \leq L \leq 10$ $0.04 < W \leq 0.05$ 2 $1.0 \leq L \leq 10$ $0.05 < W \leq 0.06$ 2 $1.0 \leq L \leq 10$ $0.06 < W \leq 0.08$ 1 $L \leq 10$ $0.08 < W$ follows 2) point defect Defects separate with each other at an interval of more than 20mm	Minor
4) Display pattern/显示模式	 $\frac{A+B \leq 0.28}{2}$ $0 < C$ $\frac{D+E \leq 0.25}{2}$ $\frac{F+G \leq 0.25}{2}$ Note: 1) Up to 3 damages acceptable 2) Not allowed if there are two or more pinholes every three-fourth inch.	Minor
5) Spot-like contrast irregularity/均匀度	Size Φ (mm) Acceptable Number $\Phi \leq 0.7$ Ignore (note) $0.7 < \Phi \leq 1.0$ 3 $1.0 < \Phi \leq 1.5$ 1 $1.5 < \Phi$ 0 Note: 1) Conformed to limit samples. 2) Intervals of defects are more than 30mm.	Minor
6) Bubbles in polarizer/玻璃内有气泡	Size Φ (mm) Acceptable Number $\Phi \leq 0.4$ Ignore (note) $0.4 < \Phi \leq 0.65$ 2 $0.65 < \Phi \leq 1.2$ 1 $1.2 < \Phi$ 0	Minor
7) Scratches and dent on the polarizer/玻璃刮痕/凹痕	Scratches and dent on the polarizer shall be in the accordance with "2) Black/white spot", and "3) Black/White line".	Minor
8) Stains on the surface of LCD panel/玻璃上有污点	Stains which cannot be removed even when wiped lightly with a soft cloth or similar cleaning.	Minor
9) Rainbow color/杂色	No rainbow color is allowed in the optimum contrast on state within the active area.	Minor
10) Viewing-area encroachment/玻璃边线出现在视域	Polarizer edge or line is visible in the opening viewing area due to polarizer shortness or sealing line.	Minor
11) Bezel appearance/铁筐外观	Rust and deep damages that are visible in the bezel are rejected.	Minor
12) Defect of land surface 表面缺陷	Evident crevices that are visible are rejected.	Minor
13) Parts mounting/部件安装	(1) Failure to mount parts (2) Parts not in the specifications are mounted (3) For example: Polarity is reversed, HSC or TCP falls off.	Minor
14) Part alignment/部件结合度	(1) LSI, IC lead width is more than 50% beyond pad outline. (2) More than 50% of LSI, IC leads is off the pad outline.	Minor
15) Conductive foreign matter (solder ball, solder hips)/杂质 (焊接遗留物)	(1) $0.45 < \Phi$, $N \geq 1$ (2) $0.3 < \Phi \leq 0.45$, $N \geq 1$, Φ : Average diameter of solder ball (unit: mm) (3) $0.5 < L$, $N \geq 1$, L : Average length of solder chip (unit: mm)	Minor
16) Bezel flaw/铁筐缺陷	Bezel claw missing or not bent	Minor
17) Indication on name plate (sampling indication label)/标志	(1) Failure to stamp or label error, or not legible.(all acceptable if legible) (2) The separation is more than 1/3 for indication discoloration, in which the characters can be checked.	Minor

12. Handling precautions 注意事项

1. Refrain from strong mechanical shock and forces to the module. It may cause improper operating or damage to the module.
防止震动和压迫模组，以免造成模组损坏和运行正常。
2. The polarizer used on the display surface is easily scratched and damaged. Extreme care should be taken when handling. When cleaning the display surface, use soft cloth with a solvent recommended : ethyl alcohol , isopropyl or hexane) and wipe gently, do not use the following solvents : water, ketone or aromatics .
模组表面的偏光极易被刮伤和损坏，所以操作是要非常小心。请用蘸有乙醇，丙酮等溶剂的湿软布轻轻擦拭，不要使用水，乙酮等溶剂。
3. Wipe off water or oil drop immediately If you leave drop for a long time, stain and discoloration may occur.
要立即擦拭掉屏幕上的油滴和水滴，否则会出现污点和杂质。
4. Do not touch pads or pins of interface directly with bare hands. When handling the LCD module, put on a soft glover like finger-glover.
不要直接用手去触碰接口处的金属管脚。当操作模组的时候，请配带软指套。
5. Protect the module from static electricity, it may cause damage to CMOS LSI.
模组需要有防静电保护，否则会损坏CMOS LSI。
6. To prevent LCD panels from degradation, do not operate or store them exposed directly to sunlight or high temperature/humidity.
不要直接在太阳,高温或潮湿环境下操作和储存LCD模组，以免影响模组的质量。
7. If the liquid crystal leaks from the panel it should be kept away from the eyes and mouths. In case of contact with skins, wash away thoroughly with soap and water.
若有液晶漏出，务必避免其入眼入口。若沾到皮肤上了，马上用肥皂和水冲洗干净。
8. Soldering should be only performed on the I/O terminals within the temperature of $280 \pm 20^{\circ}\text{C}$ and soldering time should be less than 4 seconds.
要在 $280 \pm 20^{\circ}\text{C}$ 的条件下在I/O终端实现焊接，并且保证焊接时间短于4秒。
9. Supply voltage within the specified voltage limit, the maximum rating, higher voltage cause the shorter LCD life or damaged.
绝对要在指定的电压范围内驱动模组， 因为如果在高于指定电压的情况下驱动模组，会使模组寿命变短
10. Do not input any signals before power is turned on. Do not connect or disconnect the module on the state of Power-ON.
供电之前不要输入任何信号，不要在通电时连接和段开 LCD 模组。