

RoHS


D款, 反向10.0四脚, DIP-*6.20

MAPX

MODIFICATION

DRW

DATE

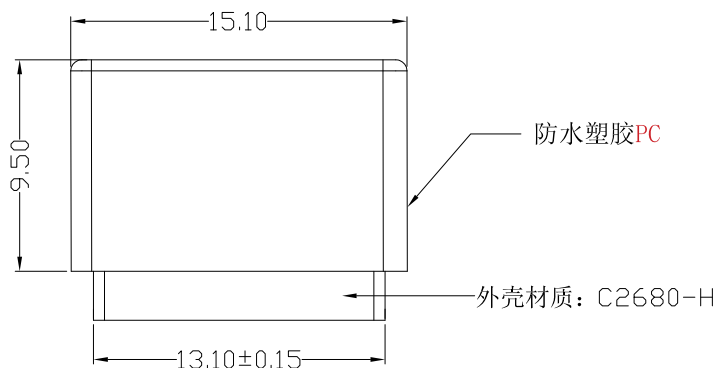

NOTES:

1.HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:

1.ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2.MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN 5000 CYCLES EXTRACTION




FORCE: 3~35N

3.ENVIRONMENTAL:


OPERATING TEMPERATURE: -55℃+85℃

4.Contact finish:

- 01:Selective Gold Flash ☒
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

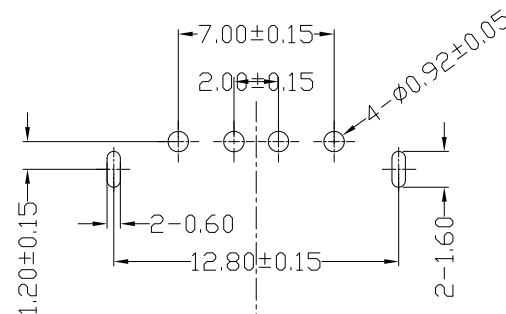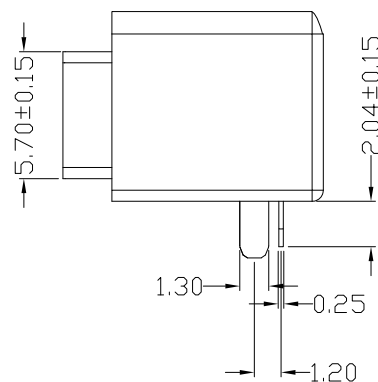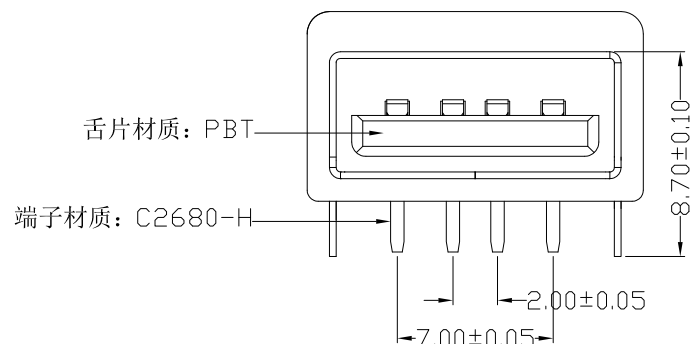

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

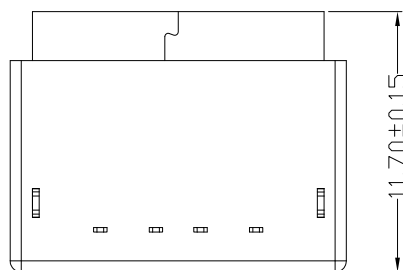

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市正三旺精密电子有限公司

单位

MM

制图

王伟

制图料号

FS-090-02

比例

1:1

审核

产品名称

USB A/F 反向10.0 D款后两脚DIP 6.20防水成品图

日期

2016-09-09

核准

W D K

角法

版本

AD

DATE

2016-09-09

APPD

VIEW

VER