
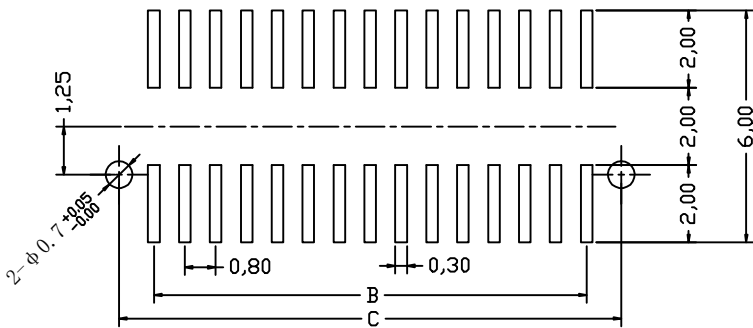
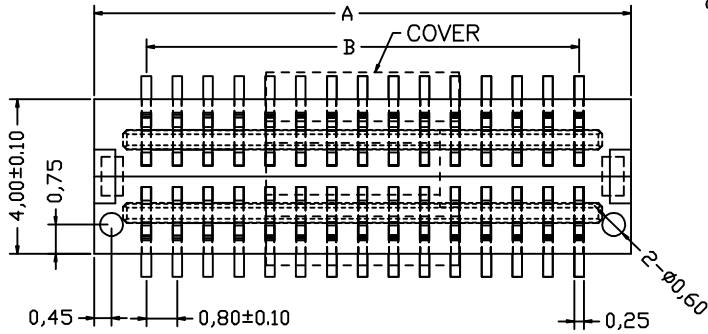

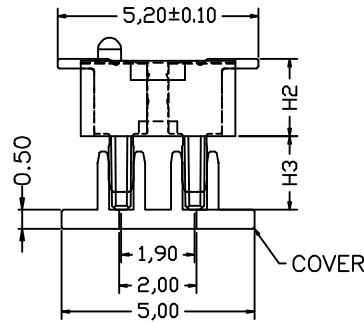


High photosynthesis (H)	The female seat height (H1)	The male seat height (H2)	Insertion height (H3)
4.0	3.0	1.0	1.9
4.5	3.5	1.0	1.9
5.0	3.0/4.0	2.0/1.0	1.9
5.5	3.5/4.5	2.0/1.0	1.9
6.0	4.0	2.0	1.9
6.5	4.5	2.0	1.9
7.0	3.0	4.0	1.9
7.5	3.5	4.0	1.9
8.0	4.0	4.0	1.9
8.5	4.5	4.0	1.9

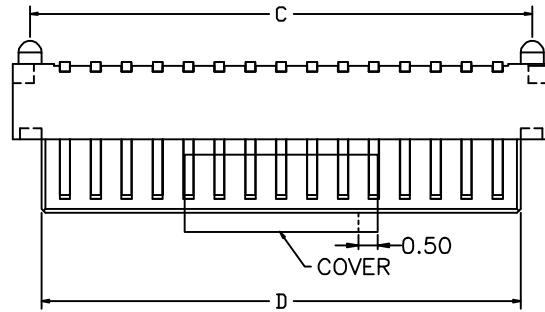

P.C.B PATTEN

Electrical:
 Vlotag Rating:50V AC(rms)/DC
 Current Rating:0.5A AC(rms)/DC
 Contact Resistance:50mΩ Max
 Insulation Resistance:100MΩ min
 Dielectric Withstanding Voltage:200V AC r. m. s
 Operting Temperature: -40°C~+85°C
 Materirils
 Housing:High Temperature Plastic
 UL94V-0
 Terminal:Copper Alloy
 Material:PA9T
 Contact:phosphor Bronae, Gold Plating;

NO. of Contacts	Dimension (mm)			
	A±0.10	B±0.10	C±0.10	D±0.10
8	5.10	2.40	4.20	3.60
10	5.90	3.20	5.00	4.40
12	6.70	4.00	5.80	5.20
14	7.50	4.80	6.60	6.00
16	8.30	5.60	7.40	6.80
18	9.10	6.40	8.20	7.60
20	9.90	7.20	9.00	8.40
22	10.70	8.00	9.80	9.20
24	11.50	8.80	10.60	10.00
26	12.30	9.60	11.40	10.80
28	13.10	10.40	12.20	11.60
30	13.90	11.20	13.00	12.40
32	14.70	12.00	13.80	13.20
34	15.50	12.80	14.60	14.00
36	16.30	13.60	15.40	14.80
38	17.10	14.40	16.20	15.60
40	17.90	15.20	17.00	16.40
44	19.50	16.80	18.60	18.00
50	21.90	19.20	21.00	20.40
60	25.90	23.20	25.00	24.40
70	29.90	27.20	29.00	28.40
80	33.90	31.20	33.00	32.40
100	41.90	39.20	41.00	40.40

Ordering Information

SGDBM - 08 - *P - H****

F=Female
M=Male






PITCH
05=0.5mm
08=0.8mm

NO. of plns
008-100pin

The female or Male seat height
10=1.0mm
20=2.0mm
40=4.0mm

单位	M M	尺寸公差	深圳市山谷道电子有限公司 SHENZHEN SHANGUDAO ELECTRONIC CO., LTD			
日期	14.08.30	.0 0 0 ±0.05 .0 0 ±0.10 .0 ±0.20	物料编号 SGDBM-08-***P-H**			
比例	1:1	角度公差				
绘制		.0 ±1' .0 0 ±0.5'	版本	A	品名	0.8mm BOARD TO BOARD 公座 双槽 立贴式
校对			视角	⊙	包装规格	卷带1000PCS/R
审核					图号	xx001

High photosynthesis (H)	The female seat height (H1)	The male seat height (H2)	Insertion height (H3)
4.0	3.0	1.0	1.9
4.5	3.5	1.0	1.9
5.0	3.0/4.0	2.0/1.0	1.9
5.5	3.5/4.5	2.0/1.0	1.9
6.0	4.0	2.0	1.9
6.5	4.5	2.0	1.9
7.0	3.0	4.0	1.9
7.5	3.5	4.0	1.9
8.0	4.0	4.0	1.9
8.5	4.5	4.0	1.9

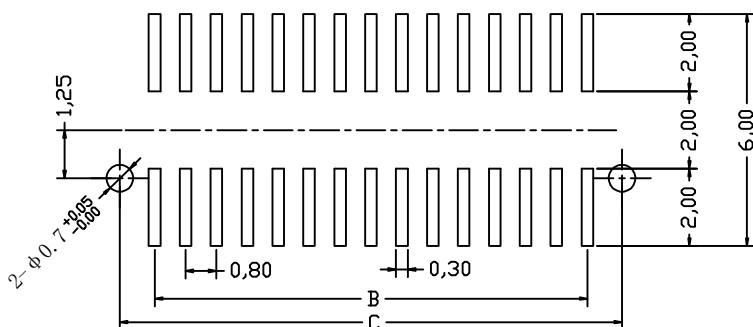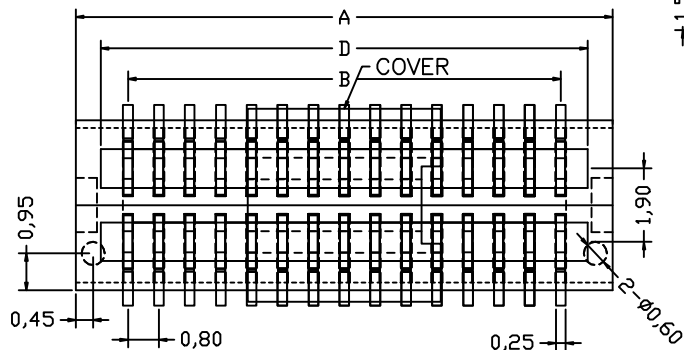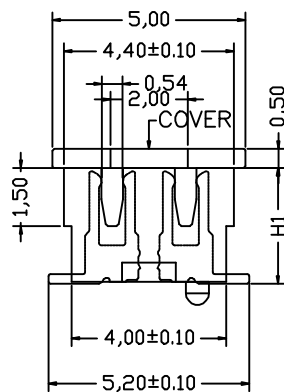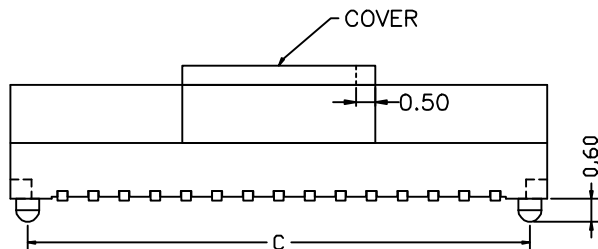

P.C.B PATTEN

Ordering Information

SGDBF - 08 - ***P-H**

F=Female
M=Male

PITCH
05=0.5mm
08=0.8mm

NO. of pins
008-100pin

The female or Male
seat height
30=3.0mm
35=3.5mm
40=4.0mm
45=4.5mm

Electrical:
Vlotag Rating:50V AC(rms)/DC
Current Rating:0.5A AC(rms)/DC
Contact Resistance:50mΩ Max
Insulation Resistance:100MΩ min
Dielectric Withstanding Voltage:200V
AC r. m. s
Operting Temperature: -40°C~+85°C
Material:
Housing:High Temperature Plastic
UL94V-0
Terminal:Copper Alloy
Material:PA9T
Contact:phosphor Bronae,Gold Plating;

NO. of Contacts	Dimension (mm)			
	A±0.10	B±0.10	C±0.10	D±0.10
8	5.10	2.40	4.20	3.70
10	5.90	3.20	5.00	4.50
12	6.70	4.00	5.80	5.30
14	7.50	4.80	6.60	6.10
16	8.30	5.60	7.40	6.90
18	9.10	6.40	8.20	7.70
20	9.90	7.20	9.00	8.50
22	10.70	8.00	9.80	9.30
24	11.50	8.80	10.60	10.10
26	12.30	9.60	11.40	10.90
28	13.10	10.40	12.20	11.70
30	13.90	11.20	13.00	12.50
32	14.70	12.00	13.80	13.30
34	15.50	12.80	14.60	14.10
36	16.30	13.60	15.40	14.90
38	17.10	14.40	16.20	15.70
40	17.90	15.20	17.00	16.50
44	19.50	16.80	18.60	18.10
50	21.90	19.20	21.00	20.50
60	25.90	23.20	25.00	24.50
70	29.90	27.20	29.00	28.50
80	33.90	31.20	33.00	32.50
100	41.90	39.20	41.00	40.50

单位	M M	尺寸公差	.0 0 0 ±0.05 .0 0 ±0.10 .0 ±0.20	深圳市山谷道电子有限公司 SHENZHEN SHANGUDAO ELECTRONIC CO.,LTD			
日期	14.08.30	角度公差	.0 ±1' .0 0 ±0.5'				
比例	1:1	物料编号	SGDBF-08-***P-H**				
绘制		版本	A	品名	0.8mm BOARD TO BOARD 母座 双槽 立贴式		
校对		视角	⊙	包装规格	卷带1000PCS/R	图号	xx001
审核							