


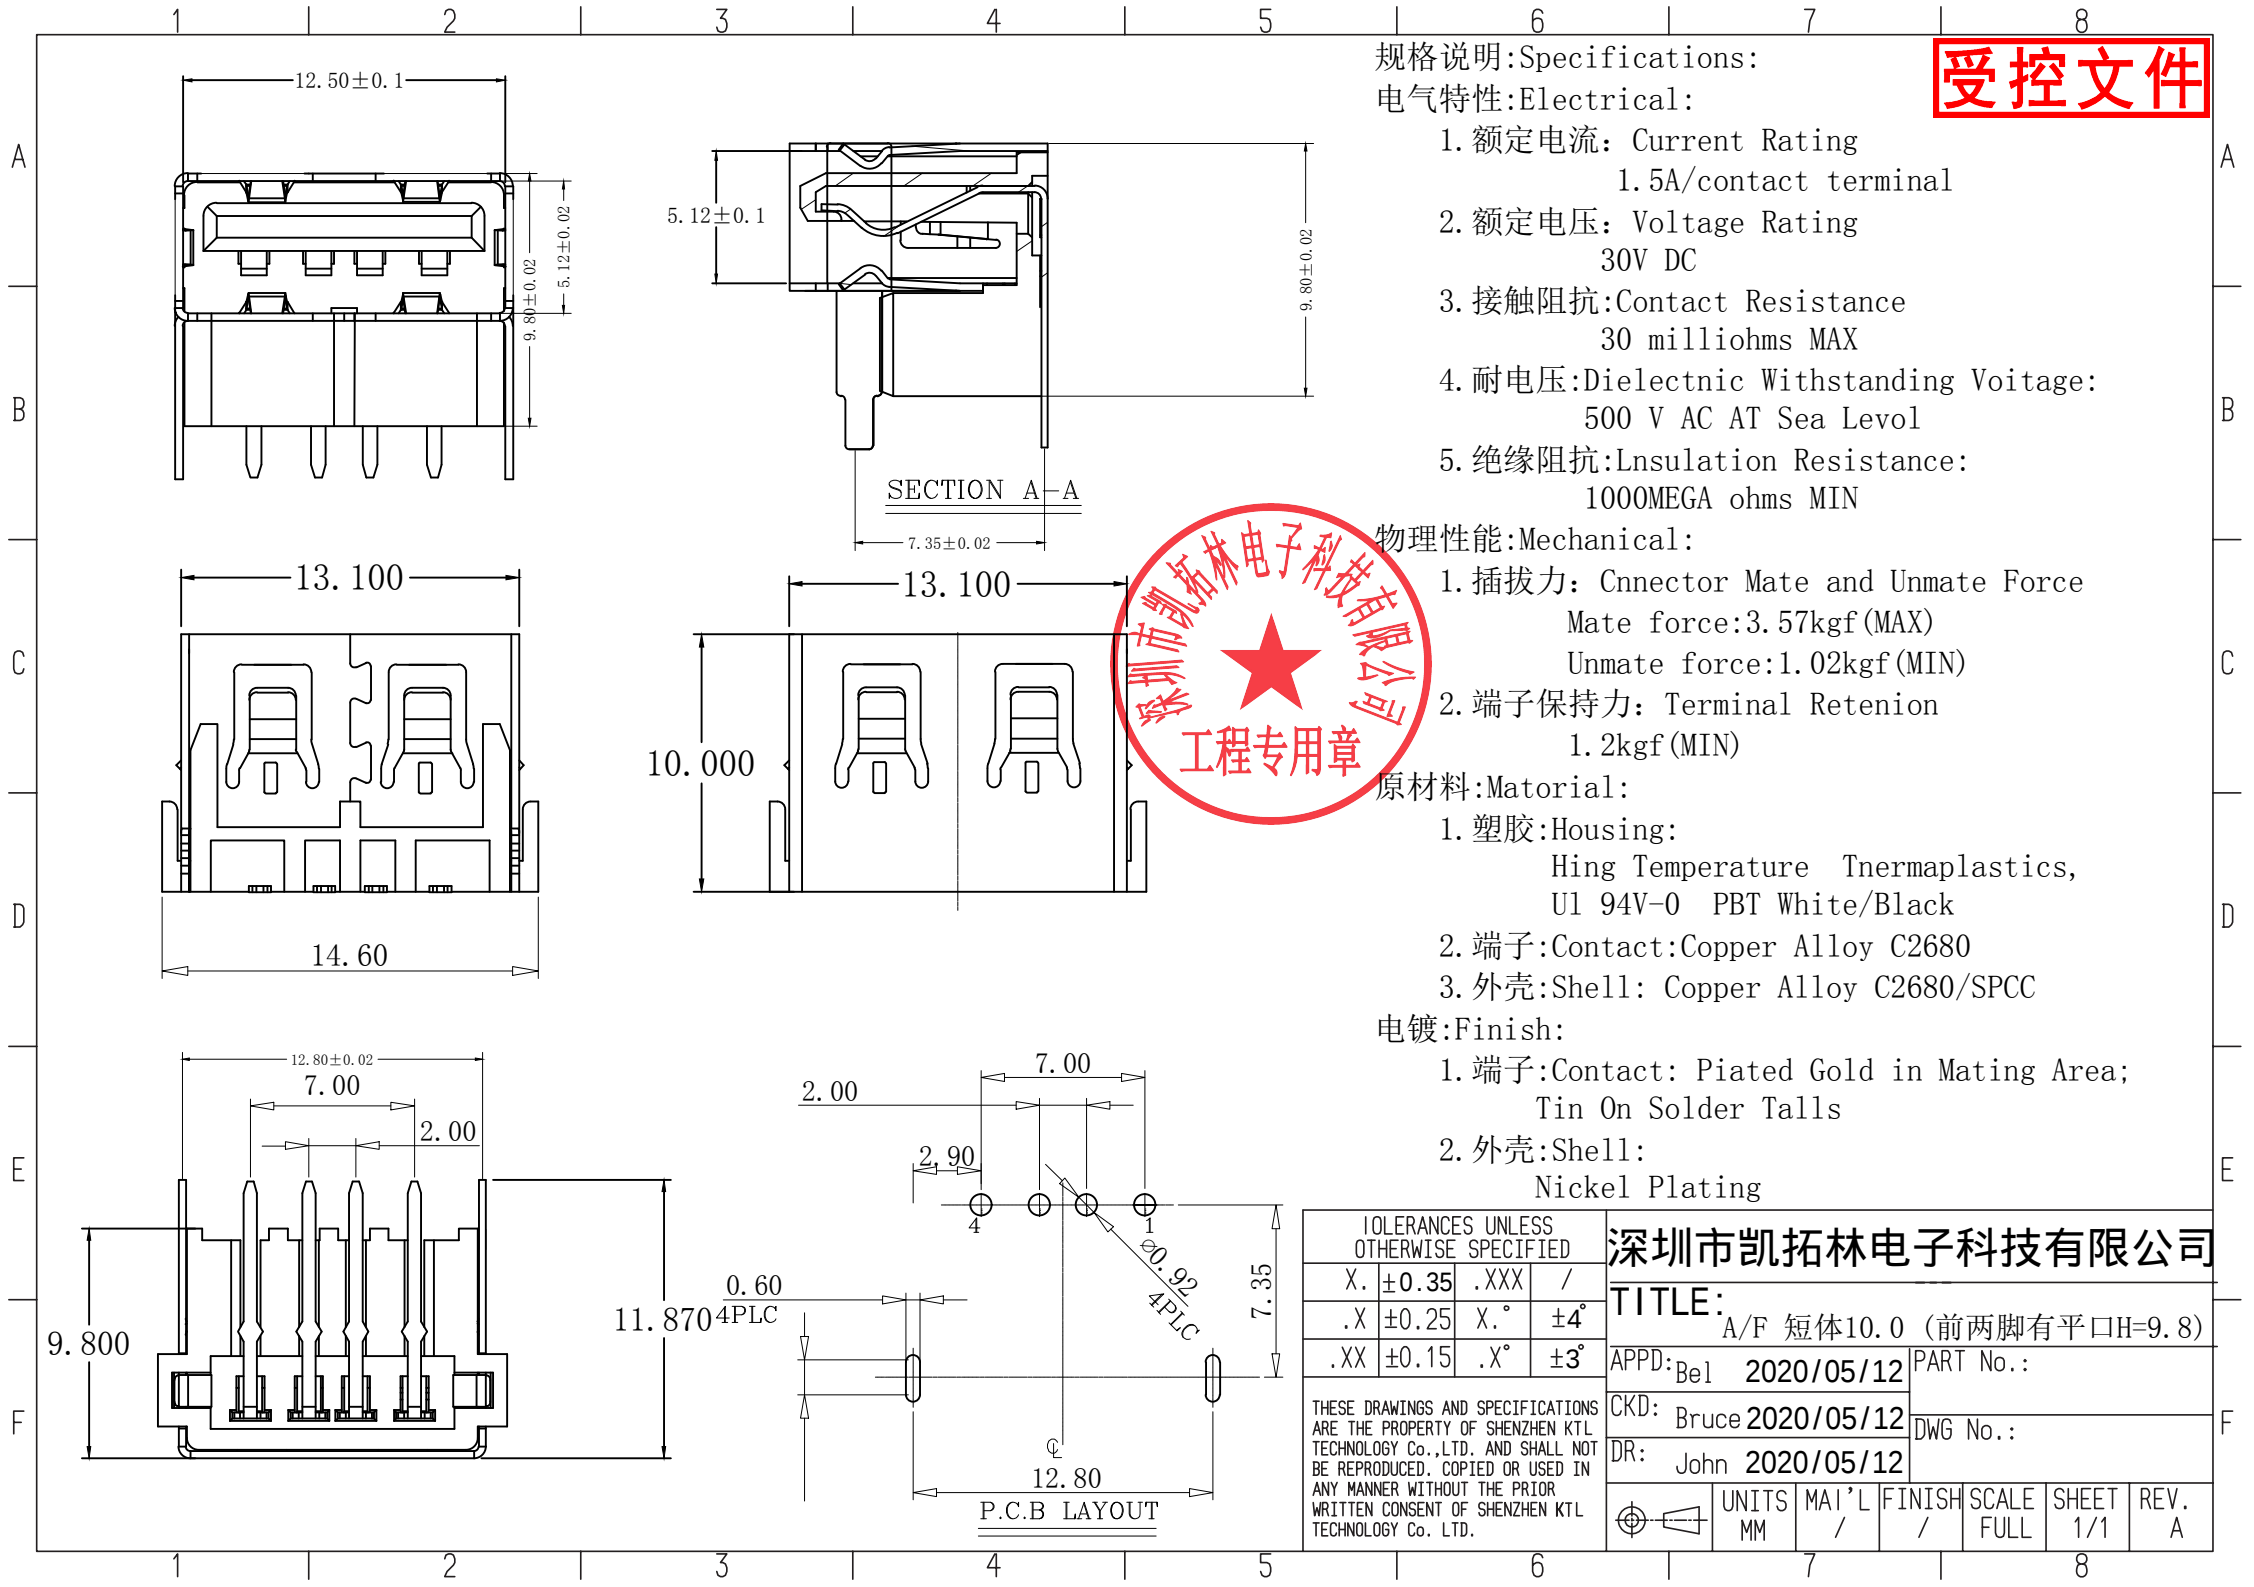

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levot
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
2. 端子保持力: Terminal Retenion
1.2kgf(MIN)

原材料:Material:

1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
U1 94V-0 PBT White/Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

TOLERANCES UNLESS OTHERWISE SPECIFIED			
X.	±0.35	.XXX	/
.X	±0.25	X.°	±4°
.XX	±0.15	.X.°	±3°
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN KTL TECHNOLOGY Co.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHENZHEN KTL TECHNOLOGY Co. LTD.			

深圳市凯拓林电子科技有限公司

TITLE:

A/F 短体10.0 (前两脚有平口H=9.8)

APPD: Bel 2020/05/12

PART No.:

CKD: Bruce 2020/05/12

DWG No.:

DR: John 2020/05/12

UNITS	MAI'L	FINISH	SCALE	SHEET	REV.
MM	/	/	FULL	1/1	A