





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating: Au Or Tin Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

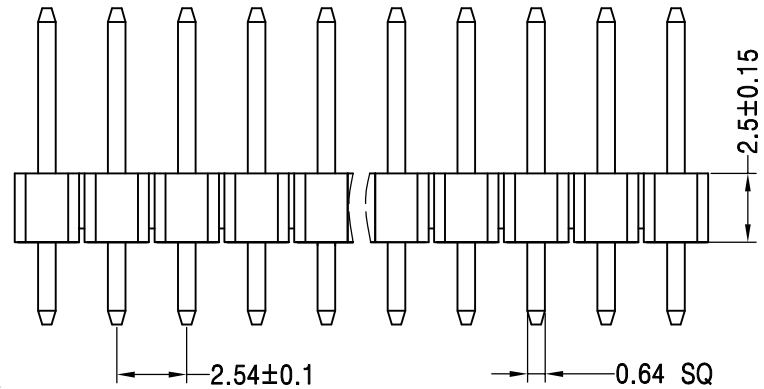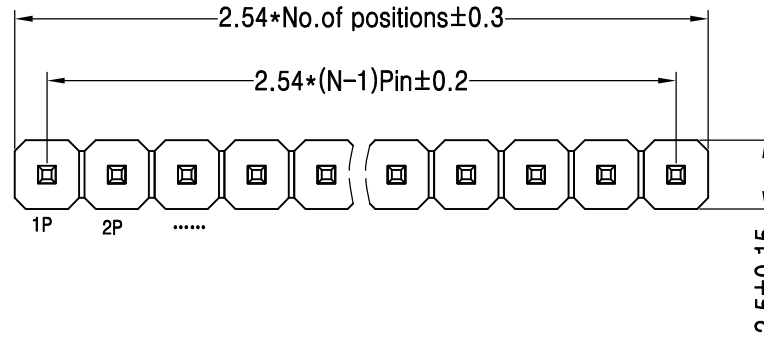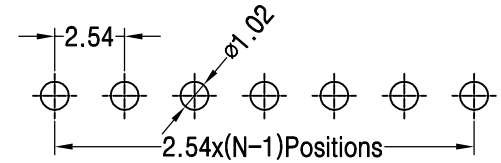

Ordering Information

P 3 D 1 09 1 5 00 4 2193

产品类型 P=排针	间距 3=2.54	塑胶高度 D=2.5	排数 1=单排	单排PIN数 1~40P	产品形态 1=DIP	塑胶材料 5=PA6T	电镀厚度 00=常规	包装方式 1=管装 2=卷装 3=盘装 4=袋装 5=盒装	序列号
--------------	--------------	---------------	------------	-----------------	---------------	----------------	---------------	--	-----

OPERATION

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW

CHECK

APPROVE

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

◆ ◀

深圳市连盛精密连接器有限公司

PART NO.

1010301405

TITLE:

2.54PH H=2.5 1*9P DIP PA6.0
 PC3.0 L=11.5 AU0.6U PA6T

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.	TITLE:
1								1010301405	2.54PH H=2.5 1*9P DIP PA6.0 PC3.0 L=11.5 AU0.6U PA6T