





RoHS

SPECIFICATIONS

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Or Tin Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

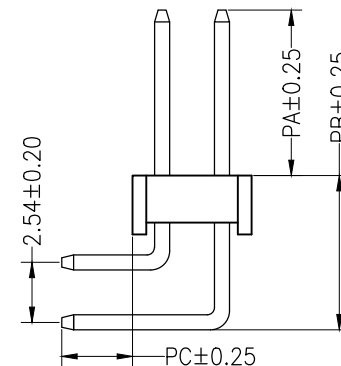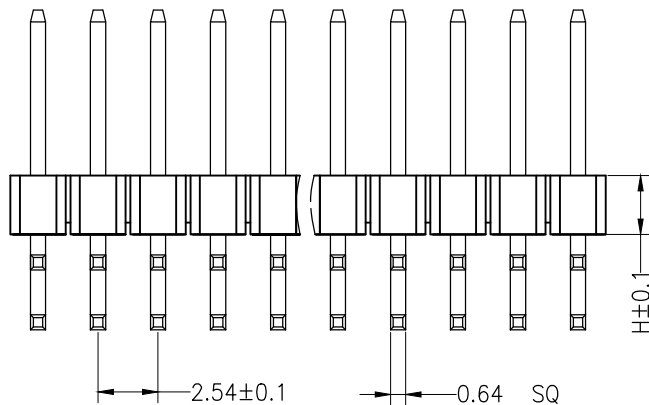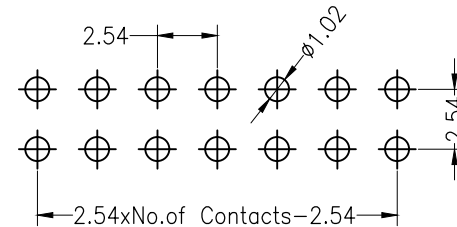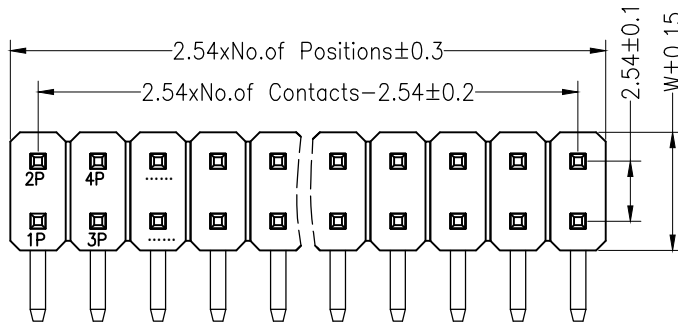

Dimension antitheses list								
ITEM	PA	PB	PC	L1	L2	L3	H	W
001	6.0	6.9	3.0	13.8	18.8		2.5	5.0
Alternate								

深圳市连盛精密连接器有限公司

PART NO. 1010300658  
 TITLE: 2.54PH H=2.5 2\*15P 正弯 PA6.0 PB6.9 PC3.0 L=13.8/18.8 AU0.6U PA6T

OPERATION

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DIM TOL

DRAW

CHECK

APPROVE

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

PROJ.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	OPERATION	SCALE	FIT
A0	2012.04.11	NEW DRAWING						